


ZEB-4PPM2UM

PoE Switch-Prime

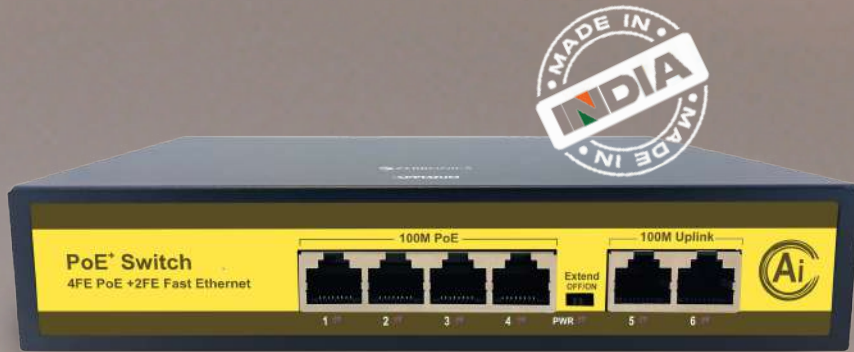

4 PORT PoE	2 PORT UPLINK	10/100M ETHERNET PORT	IEEE 802.3af/at
EXTEND POE UPTO 200M	TOTAL POWER 75W	LIGHTNING PROTECTION	

Features

- Upto 30W Per Port • Full Duplex • High Data Rate • Wide Compatibility • Dynamic Power Control
- Short Circuit Protection • Voltage Protection • Anti Interference Capability

Specifications

Connector Type	4 Ports 10/100M PoE + 2 Ports 10/100M Ethernet Uplink
Network Protocols	IEEE802.3, IEEE802.3u, IEEE802.3x, IEEE802.3ab
PoE Parameters	PoE Standard: IEEE802.3 (15.4W) & IEEE802.3at (30W)
	PoE Compatibility: IEEE802.3af/at Self Adaptive
	Power Pin Assignment : MODE A [1/2(+), 3/6(-)]
Network Media	10BASE-T: (<200 Meters)
	100BASE-TX: (<100 Meters)
Power Supply	Input: AC110-240V, 50/60Hz
	Output: 30W Per Port
	Power Budget: 75W
Performance Specification	Bandwidth: 1.2Gbps
	MAC: 1K
	Packet Buffer Memory: 1 Mbits
	10M Packet Forwarding Rate: 14880pps/port
	100M Packet Forwarding Rate: 148800pps/port
LED Indicator	Power (Red): Lit - Powered, Unlit - No Power
	Ethernet : Flash - Data Transmit, Unlit - Disconnect
Working Environment	Operating Temperature: -25°C ~ 50°C
	Storage Temperature: 20°C ~ 70°C
	Operating Humidity: Max 15 ~ 90%, Non-Condensing
	Storage Humidity: Max 10 ~ 95%, Non-Condensing
Physical Parameter	Product Dimension W x D x H : 20.2 x 14 x 4.5 cm
	Package Dimension: W x D x H : 20.5 x 19.5 x 4.8 Cm
	Net. Weight: 950g
Transmission Distance	Data Transmission Distance: 200m (Max.)
	PoE distance upto 200 meters with 10m via Cat.6
Port Surge Protection	6KV
Forwarding Mode	Cut through Switching