



Portable BT Speaker
STUDIOR3



User Manual

www.zebronics.com

Thank you for purchasing **ZEB-STUDIO R3** Portable BT Speaker. Please read this user manual carefully before operation & save it for future reference.

Note:

- *Avoid the use of this product at the high temperature and high humidity environment.*
- *Avoid self-disassembly of the products or it results in the voiding the product's Warranty.*

Caution: There is a risk of explosion if one product is disposed in the fire.

To know more about Terms and conditions for warranty policy, please visit :

<https://zebrionics.com/pages/warranty-policy>

Features:

Multi Connectivity (BT v5.2 | AUX | USB | mSD)

Dual 6.3mm Mic Inputs

Built in 6000mAh Rechargeable Battery

3 EQ Modes

Deep Bass

Dual Passive Radiator

TWS Function

RGB LED Lights

Media / Volume Control

Wired MIC

Premium Metal Finish

LED Indication Lights

Carry Strap

Specifications:


Model	: ZEB-FSPK 4
Output Power (RMS)	: 140W
BT Version	: v5.2
Driver Size	: Woofer-10.16cm x 2 Midrange-5.71cm x 2 Tweeter - 2.54cm x 2
Speaker Impedance	: Woofer - 4Ω Mid range - 4Ω Tweeter - 8Ω
Frequency Response	: 50Hz-20kHz
S/N Ratio	: ≥60dB
Max. Supported USB/mSD Memory Size	: 32GB
Supported Audio Formats	: MP3,WMA, WAV
Charging Time	: 3.5h
Playback Time	: 13h*
Product Dimension (W x D x H)	: 42 x 15.5 x 17 cm
Net. Weight	: 6.74kg

Package Contents

Speaker	: 1 U
Wired MIC	: 1 U
Detachable Carry Strap	: 1 U
Power Adaptor	: 1 U
Audio cable	: 1 U
QR Code Guide	: 1 U


* at 50% volume (LED off) - Default EQ

Buttons and Ports Description :

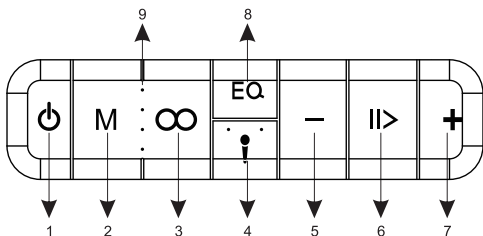

1. Power Button - Long press to turn ON/OFF the speaker.
2. Mode Button - Short press to switch between the modes.
3. TWS Button - Short Press - TWS connection, Long Press - MIC Priority.
4. Short Press - MIC echo & MIC Volume control button, Long Press - Top Button Panel RGB Mode control.
5. Backward/Volume down Short press to decrease the volume Long press to move to previous track.
6. Play/Pause.
7. Forward/Volume Up Short press to increase the volume Long press to move to next track.
8. EQ Button - Short Press - EQ Button, Long Press - Speaker RGB Mode control.
9. Battery level indication.

Port Description :

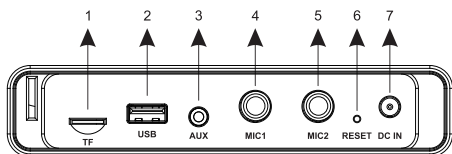

1. Micro SD card slot
2. USB port
3. AUX port
4. Mic input 1
5. Mic input 2
6. Reset button
7. Charging port

General Instructions

BT Mode:

Switch on the speaker to BT mode, Scan for nearby BT devices in your device. Tap on **"ZEB-STUDIO R3"** to connect.

USB Mode:

Insert the USB Drive to the USB port, the speaker will detect the USB Drive and the audio file will be played automatically.

mSD Mode:

Insert the mSD Card to the mSD port, the speaker will detect the audio file will be played automatically.

AUX-IN:

The speaker can be connected to an audio device using a 3.5mm cable. Connect the one end of the cable to the speaker & connect the other end of the cable to an audio source. The tracks from the audio source can be heard through the speaker.

TWS Connectivity:

When two speakers are in Bluetooth mode, Short press the TWS button ∞ of one speaker to enter TWS mode, It will search automatically, when two speakers connected successfully, you can control two speaker at the same time. Need another **ZEB-STUDIO R3** for TWS Pairing.

Charging Instruction:

Connect the Charging pin to the charging port of the Adapter to the speaker. while charging Red LED will glow and the LED goes OFF once the speaker is fully charged.

EQ Modes:

By clicking the EQ button can switch to different EQ modes. There are 3 EQ modes. Please find the LED indication for different EQ modes

Default - White

BASS - Red LED

TREBLE - Blue LED

Loudness - Green LED

ISO 9001:2015 Certified Company
www.zebronics.com

