



Surveillance 4G Bullet Camera

ZEB **WFPT** **3M**



User Manual

www.zebronics.com

Dear Customer,

Please refer to this user manual for optimum usage of **ZEB-WFPT3M** CCTV Surveillance Bullet Camera.

Features

3MP Camera

Full Duplex Audio Communication

4 Built-In LED (IR/White LED)

With Smart Night vision / IR night vision /
Colored Night Vision

Supports 4G Sim Card

Accessible Reset Switch

Dedicated mSD card slot for storage

10x Digital Zoom

Remote Alarm trigger

Motion Detection notification (via mobile app)

Advanced App for Smartphones

Specifications

Image Sensor : 1/2.8" CMOS Sensor

Resolution : 3MP (2304 x 1296)

Lens : 4mm

LED : 4 IR / White Array LED

IR Distance : 30 Meters

White LED Distance : 15 Meters

Min Illumination :

Color : 0.01

Lux, Black & White : 0.001 Lux

Day & Night : IR-cut Auto ICR

Light Mode	: Full Color / Infrared / Intelligent
Viewing Angle	
Horizontal	: 75°
Vertical	: 59°
Diagonal	: 88°
Video Streaming	
Main Stream	: 2304x1296@15fps
Sub Stream	: 800x448@15fps
Audio Input/Output	: Two way audio, Built in microphone and speakers
Audio Compression	
Standard	: AAC
Zoom	: 10 x Digital
DNR	: 3D Digital Noise Reduction
White Balance	: Auto
WDR	: D-WDR
Electronic Shutter	: Auto
Features	: Motion Detection, Human Detection.
Monitoring	: Andriod, iOS, Windows
Slots	: 4G Sim Card / Micro SD Card
Storage	: Support Micro SD Card upto 256GB
Connection Mode	: 4G Sim Network

4G Frequency Band

FDD-LTE : B1/B3/B5/B8;

TDD-LTE : B34/B38/B39/B40/B41

Connectors : RJ45 LAN Female Connector
(100 Mbps) DC Power Input
Female port Reset Button

Power Input : DC12V/1A
(DC 2.1mm Connector)

Working Temperature /

Humidity : 0-50° C RH Less than 95%
(No Condensation)

Storage Temperature /

Humidity : -20° C to 60° C / 20% to 90% RH

Housing Type : Plastic

Dimension : 7.44 x 18.1 x 7.1 cm
(Antenna pointing straight wards)
7.44 x 17 x 13.2 cm
(Antenna pointing upwards)

Net Weight : 225 g

Note : *The values above are the max. frame rates of each stream; for multiple streams, the values will be subjected to the total encoding capacity.

Configuration Procedure:


Step1: Power ON the device

Step2: Reset camera- Please press and hold the reset button for 5s until you hear a beep from the device.


Step3: Scan QR code and download the latest app



Step4: Open Esee cloud to Register and Login.

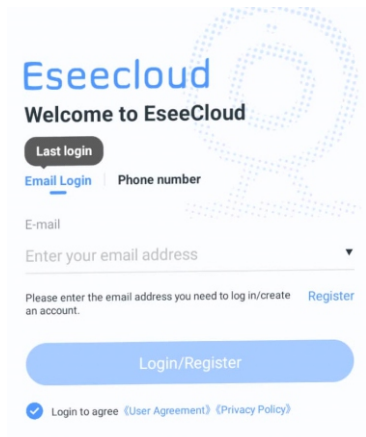
The image shows the Eseecloud login and registration interface. At the top, the "Eseecloud" logo is in blue, followed by the text "Welcome to EseeCloud". Below this is a dark grey button labeled "Last login". There are two options for login: "Email Login" (which is underlined in blue) and "Phone number". Under "Email Login", there is a label "E-mail" and a text input field with the placeholder "Enter your email address". Below the input field, there is a line of text: "Please enter the email address you need to log in/create an account." To the right of this text is a blue link labeled "Register". At the bottom of the form is a large blue button labeled "Login/Register". At the very bottom, there is a blue checkmark icon followed by the text "Login to agree" and two links: "(User Agreement)" and "(Privacy Policy)".

Step5: Please select Add camera option

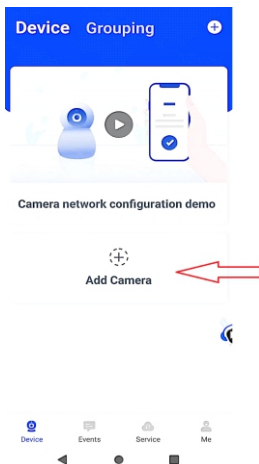

Step6: Select Scan to add option


Discovery of nearby equipment

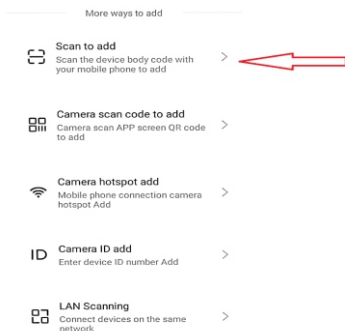

Step 7: Scan QR code on the body of the camera



Step 8: Device will get configuring

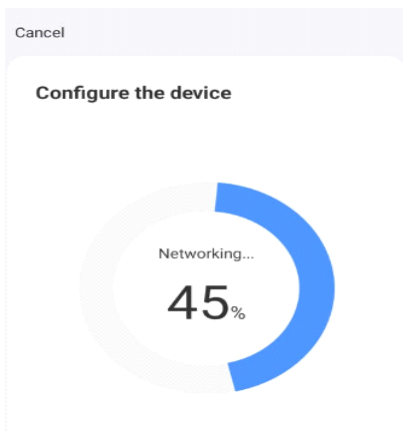

Step 9: After adding the device successfully, please name your Device

4:38

Cancel

Configure the device

The device is added successfully, please name your device

Office

Living Room Study Room

Master Bedroom Office

The store

Choose your usage to provide you with more accurate services

Watching the elderly Watching children

Watching pets Home security

Next

Step10: Please select Finished option

5:51

Cancel

Install

Please place the device in the installation location and check the network and screen status

Signal strength

Strong signal at current location, suitable for camera installation

Finished

Important:

Please save the QRcode to the mobile Phone album for pairing the device in future

ISO 9001:2015 Certified Company
www.zebeye.com

