




ZEB Power Bank  
**MB10000S12**

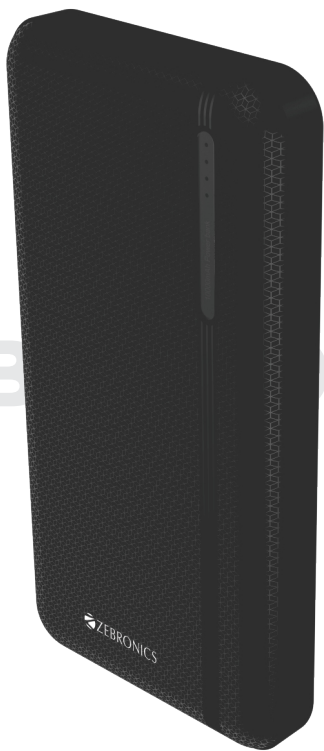

**User Manual**

[www.zebronics.com](http://www.zebronics.com)

Thank you for purchasing **ZEB-MB10000S12** Power bank. Please read this user manual carefully before operation & save this user manual for future reference.

**Note:**

- Avoid the use of this product at the high-temperature and high humidity environment.
- Avoid self-disassembling of product, as it will result in the failure of warranty.
- Please charge the product with rated (DC 5V/3A, DC 9V/2A, DC 12V/1.5A) with Type C power Adapter and DC 5V/2A, DC 9V/1.6A, DC 12V/1.5A with Micro USB power adapter.

**Caution:**

There is a risk of explosion if the product is disposed of in the fire.

To know more about Terms and conditions for warranty policy, please visit <https://zebronics.com/pages/warranty-policy>

**Features:**

Dual USB Output  
Rapid Charge  
LED Indicator  
Mobile/Tablet Compatible  
PD 3.0 Type C Output  
Type C Input  
Over Charge Protection  
Overload Protection

Short Circuit Protection

20W Max. Output


Texture finish

**Specifications :**

Battery Capacity	: 10000mAh
TYPE C Input	: DC 5V/3A, DC 9V/2A, DC 12V/1.5A
Micro USB Input	: DC 5V/3A, DC 9V/2A, DC 12V/1.5A
Output 1	: DC 5V/3A, DC 9V/2A, DC 12V/1.5A
Output 2	: DC 5V/2A, DC 9V/1.6A, DC 12V/1.5A
Output 3 (TYPE C)	: DC 5V/3A, DC 9V/2.22A, DC 12V/1.67A (20W max. output)
No.of Output port	: 2 USB + 1 Type C PD 3.0
Charging Time	: approx.3.5 h (with 5V Type-C)
Product Dimension (W x D x H)	: 6.95 x 13.6 x 1.6 cm
Net Weight	: 213.5g

**Package contents :**

Power Bank	: 1 U
Charging Cable	: 1 U
QR Code Guide	: 1 U

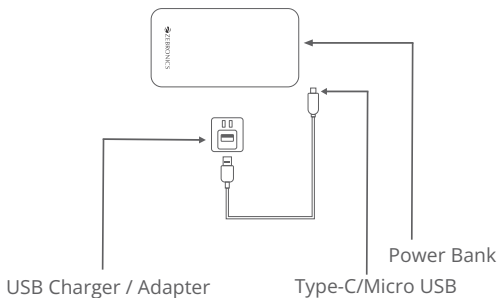

## Charging instructions

Connect the Type C / Micro USB end of the charging cable to the power bank and the USB end to the charger / adapter with a DC 5V/3A, DC 9V/2A, DC 12V/1.5A for Type C Input and DC 5V/12A, DC9V/1.6A, & DC 12V /1.5A Micro USB Input.

## Charging your Device with the Power Bank

Connect your device with the Type C connector or Micro USB connector end of the cable and connect the other end of the cable to the power bank Output port.

### Note

Simultaneous Usage of the power bank output provides standard 5V DC output.

ISO 9001:2015 Certified Company

[www.zebronics.com](http://www.zebronics.com)