



Power Bank
ZEB EnergiSafe 10R6



User Manual

www.zebronics.com



Thank you for purchasing **ZEB-EnergiSafe 10R6** power bank. Please read this user manual carefully before operation and save it for future reference.

Note:

- Avoid the usage of this product at high-temperature and high-humidity environments.
- Avoid the self-disassembling of the product or it will result in voiding the Product's warranty.
- Please charge the product with a power adapter output rated (DC 5V/3A, 9V/2A, 12V/1.5A) for Type-C Input port.

Caution: There is a risk of explosion if the product is disposed in the fire

To know more about Terms and conditions for warranty policy, please visit

<https://zebronics.com/pages/warranty-policy>

Features:

- 22.5W Max. Output
- Rapid Charge
- LED Indication
- Mobile/Tablet Compatible
- Type C Input & Output
- Over Charge Protection

- Overload Protection
- Short Circuit Protection
- Compact Design with Built-in Stand
- With Built-in Cables (USB-A, microUSB, Type-C & Lightning)
- USB Output Port

Specifications:

Battery Capacity : 10000mAh

No. of Input : 4

No. of Output : 6

Type-C Input (Port) : DC 5V/2.8A, 9V/2A,
12V/1.5A

Lightning Port Input : DC 5V/2A, 9V/2A,
12V/1.5A

USB Cable Input : DC 5V/2A

Outputs

Output 1 (Type -C Port): DC 5V/3A, 9V/2.22A,
12V/1.67A, 5~11V/2A

Output 2(Type -C Cable): DC 5V/3A, 9V/2.22A,
12V/1.67A, 5~11V/2A

Output 3

(Lightning Cable) : DC 5V/2.4A

Output 4 (Micro USB) : DC 5V/2.4A

Output 5 (USB Port) : DC 5V/3A, 9V/2A,
10V/2.25A, 12V/1.5A
(22.5W Max. Output)

Wireless Charging


Output : DC 5V/1A, DC 7.5V/1A,
DC 9V/1.12A, DC
9V/1.67A ,DC 12V/1.25A

	(15W max.)
No.of Outputs	: 1 USB Port + 1 Type C port + 1 Type C cable + 1 Lightning Cable + 1 Micro USB Cable + Wireless Charging
Charging Time	: 3h approx
Product Dimension (W x D x H)	: 6.8 x 2.3 x 10.8 cm
Package Dimension (W x D x H)	: 9.7 x 2.2 x 15.2 cm
Net Weight	: 207.6 g
Country of Origin	: Made in India

Package Contents


Power bank	: 1 U
Charging Cable	: 1 U
QR Code Guide	: 1 U
Magnetic Ring	: 1 U

Port Description:

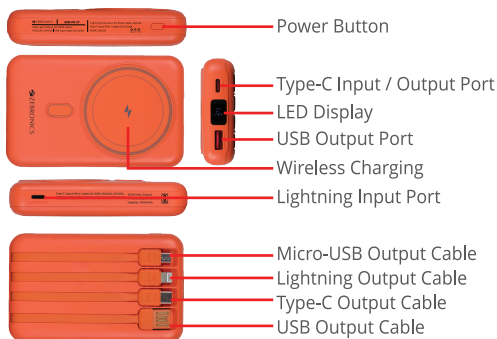

Charging Instructions:

Connect the Type C end of the charging cable to the power bank and the USB end to the charger or can charge through Built in Type-C cable.

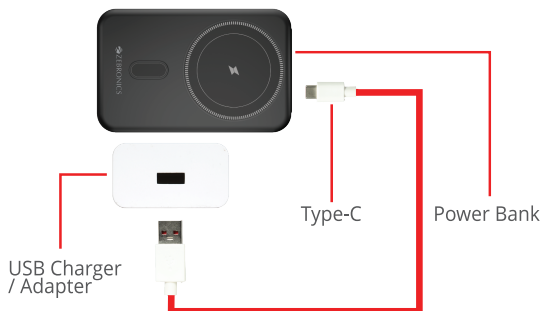

Charging your Device with the Power Bank:

Connect the Type-C / Micro USB / Lightning end of the charging cable to the device and the USB/ Type-C end to the output ports of the power bank.



Wireless Charging Pad:

Place the device above the wireless charging pad of the power bank. Make sure that the mobile phone supports wireless charging.

Note:

Make sure no object is present in between the wireless charging device and power bank.

Switch on power button before placing device on charging pad.

Simultaneous Usage of the power bank output provides standard 5V DC output.

