



Ethernet Switch **ZEB**ETS5M



User Manual

www.zebronics.com

Hello Zebbee! Please read the following instructions carefully in order to use the product optimally.

Note:

- Do not expose the device to steam or dust.
- Do not install the device at position exposed to sunlight or in high temperature.
- Do not directly expose the device to humid environment.
- The device must be installed on solid and flat surface.
- Do not block air vent of the device or ventilation around the device.
- Do not place any object on the sides of the device to avoid ventilation issue.
- Do not disassemble the device.

Features

5 x 10/100 Mbps LAN Ports

Anti Negotiation

Auto MDI/MDIX

High Speed 10/100Mbps

IEEE 802.3X flow control

Compact Design

Fanless

Plug & Play

Wide Compatibility

Full Wire Speed

Specifications


Connector Type	: 5 100M RJ45 Ports
Network Protocols	: IEEE802.3/802.3u, IEEE802.3i IEEE802.3x
Network Media	
10BASE-T	: <100 meters
100BASE-TX	: <100 meters
Power Supply	
Input	: DC 5V---1A
Performance Specification	
Bandwidth	: 1Gbps
MAC	: 1K
Packet Buffer Memory	: 512Kbits
10M Packet Forwarding Rate	: 14880pps/port
100M Packet Forwarding Rate	: 148800pps/port
LED Indicator	
Power (Red)	: ON - Powering, OFF - No Power
Ethernet (Green)	: Flashing - Data Transmission, OFF - Disconnect
Working Environment	
Operating Temperature	: 0°C ~ 40°C
Storage Temperature	: -40°C ~ 70°C
Operating Humidity	: 5% ~ 90% (No Condensation)
Storage Humidity	: 5% ~ 90% (No Condensation)
Physical Parameter	
Product Dimension	
W x D x H	: 9.2 x 7.2 x 2.3cm

Net. Weight	: 72g
Port Surge Protection	: 1KV
Lightning Protection	: 1KV
Forwarding Mode	: Store and forward

Package Contents:	
Ethernet Switch	: 1 U
Power Adapter	: 1 U
QR Code Guide	: 1 U

Typical Application& connection setup :

The typical application of the device is shown below.

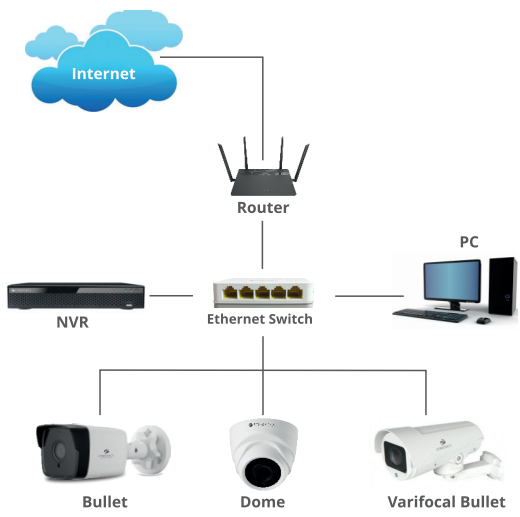

Product Description

Front Panel



LED Indicators



No.	Description
1	5 x 10/100 Mbps LAN Ports
2	DC 5V~1A Input