

 ZEBRONICS

Power Bank
ZEB **MW67**



User Manual

www.zebronics.com

Thank you for purchasing **ZEB-MW67** power bank. Please read this user manual carefully before operation & save this user manual for future reference.

Note:

- *Avoid the use of this product in high-temperature and high-humidity environments.*
- *Please charge the product with a rated power adapter.*
- *Avoid the self-disassembling of the product or it results in voiding the Product's warranty.*
- *To know more about Terms and conditions for warranty policy, please visit*

<https://zebronics.com/pages/warranty-policy>

Caution : *There is a risk of explosion if the product is disposed in the fire.*

Features :

22W Max. Output

15W Max. Wireless output

10000 mAh

Rapid Charge

LED Indicator

Type C PD (port + cable) Input & Output

USB Output

Built-in protections

Built-in Wireless Charging Pad

Built-in foldable stand

Compact design


Specifications:

Battery Capacity	: 10000mAh
TYPE C Input	: DC 5V/3A, 9V/2A, 12V/1.5A
Output 1 (USB)	: DC 5V/3A, 9V/2.2A, 12V/1.85A
Output 2 (TYPE C Port)	: DC 5V/3A, 9V/2.22A, 12V/1.85A, 5~11V/2A PPS (22W Max. output)
Output 3 (TYPE C - Attached cable)	: DC 5V/3A, 9V/2.22A, 12V/1.85A, 5~11V/2A PPS (22W Max. output)
Wireless Charging Output	: DC 5V/1A, DC 7.5V/1A, DC 9V/1.12A, DC 9V/1.67A, DC 12V/1.25A (15W max.)
No.of Output ports	: 1 USB + 1 Type C PD Port + 1 Type C PD attached cable
Protections	: Short circuit, Overload, Overcharge
Product Dimension (W x D x H)	: 7.10 x 2.3 x 11.2 cm
Net Weight	: 205 g
Country of Origin	: Made in India

Package Contents

Power Bank	: 1 U
Charging Cable	: 1 U
QR Code Guide	: 1 U

Product Representation :

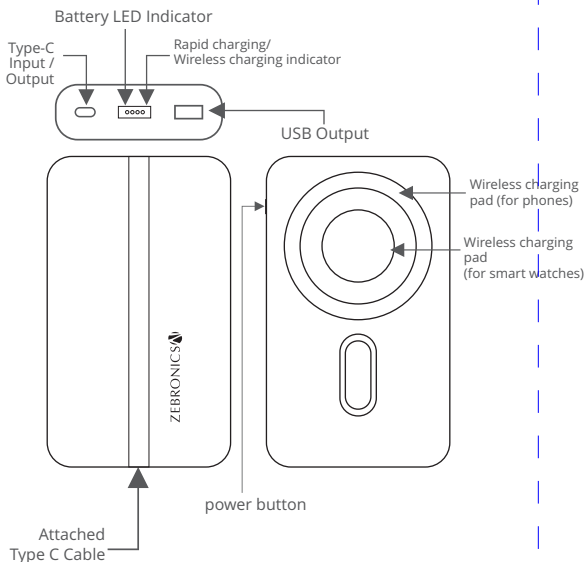

Charging the Power Bank :


- Plug the Type-C cable into the charging port of the power bank and connect the other end to a USB or Type-C cable attached to the power adapter.

Charging your Device with the Power Bank:

- Use a dedicated Type-C, Lightning, or Micro USB cable to connect one end to the power bank Type-C / USB output port. Alternatively, connect directly using the included attached Type-C cable.

Alternatively, connect directly using the included attached Type-C cable.

For wireless charging, press the power button on the power bank and place phones or smart watches that support wireless charging on the power bank's wireless charging pad.

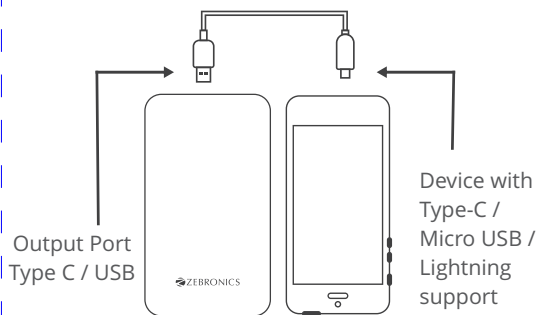

[Note: Simultaneous usage of the power bank output provides standard 5V DC output]

ISO 9001:2015 Certified Company
www.zebronics.com