



Smart LED Projector

PixaPlay[®] 15 Plus



User Manual

www.zebronics.com

Dear Customer,

Thank you for purchasing the **ZEB-Pixaplay 15 PLUS Smart LED Projector**. Please read the user manual carefully before usage & save it for future reference.

Note:

- To provide a stable power supply, kindly use the cable provided with the product and connect to a AC 100–240V, 50/60Hz power source.
- Avoid the self-disassembly of the product as it results in voiding the product's warranty.
- Avoid looking directly at the projector lens while it is active.
- Make sure that the projector's air vents are not blocked while in use. The device must be kept in a well-ventilated surrounding for proper functioning.
- It is recommended to power OFF the projector after a continuous usage of 6 hours maximum.
- Place the projector away from water or other liquids. Avoid water accumulation and ensure good ventilation.
- In case of enquiry regarding the projector, email us at enquiry@zebronics.com or contact us at 044 4000 0004.

Features:

- 13500 Lumens
- 4k support
- FHD 1080p (Native)
- Upto 457cm Screen Size
- Auto Focus Technology
- Auto Keystone Adaptation
- Remote Control (IR + BT)
- 30,000 h lifelong LED lamp
- 160° Tilt Mechanism
- Dual band (2.4GHz & 5GHz)
- Built in Speakers
- Multi Connectivity (BT v5.4 / USB/ HDMI (ARC) / AUX OUT)
- Integrated Stand with Carry Handle
- Quad Core Processor
- Miracast
- IOS Screen mirroring
- Smart Projector
- APP Support

Specifications:

Model Name : ZEB-PixaPlay 15 Plus

Model ID : ZEB-PixaPlay 15

Screen size : 99.06 - 457 cm

Native Resolution : 1920 x 1080 FHD

Supported Resolution : 4K (Max)

RAM : 1 GB


Core Processor : Quad core Processor

Storage	: 8 GB
Bluetooth Version	: v5.4
Wi-Fi Connectivity	: Dual band Connectivity (2.4GHz & 5GHz)
Display Technology	: LED
Lifespan	: 30000 h
Brightness	: 13500 Lumens
Contrast Ratio	: 1000:1
Projection Distance	: 1.2 - 5.2 m
Port Interface	: AUX OUT, USB , HDMI (ARC)
Video file format	: AVI, FLV, MP4,MOV, VOB, 3G2, MPG, SWF, TS, M2TS
Input Voltage	: AC 100-240V, 50/60Hz
Product Dimension (W x D x H)	: 26.5 x 17.8 x 20 cm
Net. weight	: 2 kg

Package Contents:


Projector	: 1 U
Remote Control	: 1 U
Power Cord	: 1 U
HDMI Cable	: 1 U
QR code Guide	: 1 U
Cleaning Kit	: 1 U

Product Description:

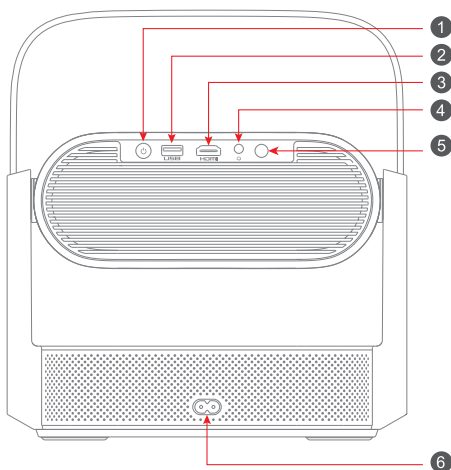

- ① Power Button
- ② USB Port
- ③ HDMI (ARC) Port
- ④ AUX Out
- ⑤ IR
- ⑥ Power Input

Remote Control:

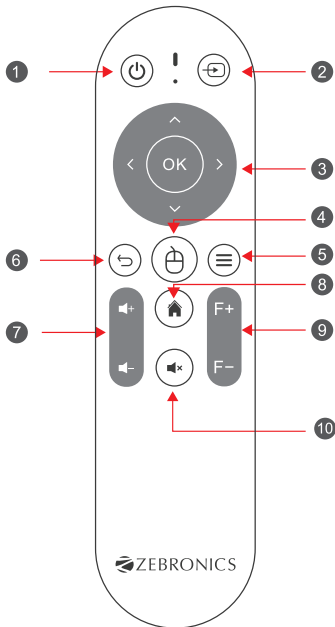

① Power Button

② Source

③ Navigation

④ Mouse Mode

⑤ Menu

⑥ Back

⑦ Volume Control

⑧ Home

⑨ Focus Adjust


⑩ Mute

Note:


To avoid battery leakage and corrosion, if the remote will not be in use for a long time, kindly remove the batteries.

Setting Up the Projector:

- Connect the power cord to the socket of the projector and turn it ON.
- Before turning ON, make sure to place it in a flat surface for a proper projection. Then press the power button / turn it on by using the remote.
- Align the projector as shown in the image below to ensure proper projection.

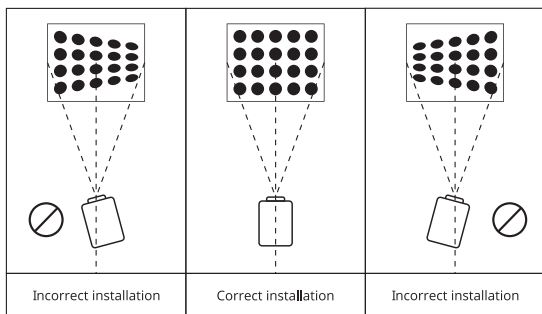


Projection Distance and Size:

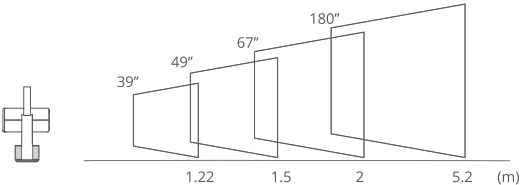

Note: Due to optical device error of about 3%, the above data is for reference only. Please use actual measurement when installing the device.

Auto Focus:


- **Go to settings > Projection > Focus**
- Select auto focus to automatically adjust the image
- You can also enable the other features
- This is Particularly useful in settings where the projector might be moved or where the distance to the screen can vary.

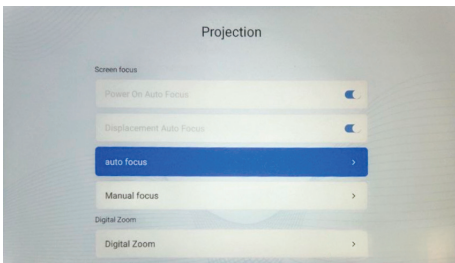

Auto Keystone:


- Auto keystone correction feature automatically adjusts the image to ensure it appears rectangular, even if the projector is angled or not positioned directly in front of the screen. This is particularly helpful when the projector is set up on a table or mounted at an angle.

Go to Settings > Projection > Keystone Corrections

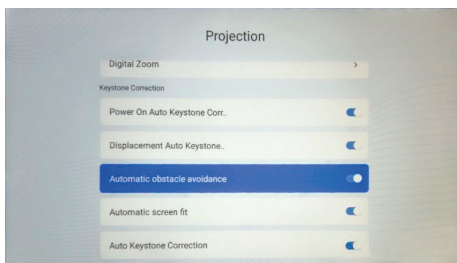


Home Screen:

- Once the projector is set up, the projector will lead you to the home screen
- The Home Screen will display Apps, settings, source input, Screen Mirroring, WiFi, Bluetooth, File Manager.

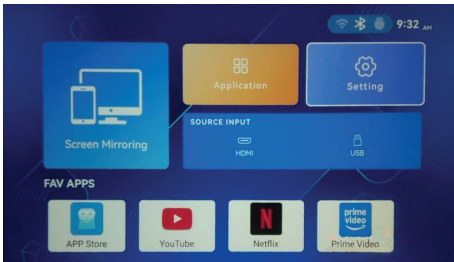


Source Selection:

- Press the INPUT button on the remote to open the source menu, then use the navigation buttons to select HDMI, USB, or the desired input source and press OK to confirm.

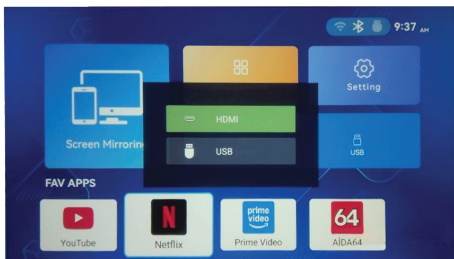


Settings:

- **Open the homepage > settings**
- This menu contains submenus for Network Setting, Bluetooth settings, Projection setting, language, Date, System, Application, Other setting and About.

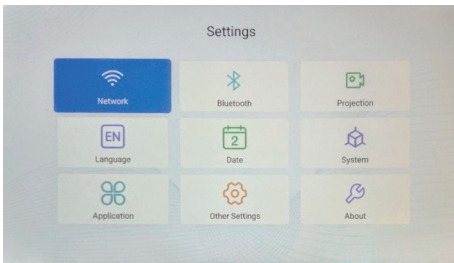


WiFi Settings:

- **Go to Settings > Network**
- Open the WiFi settings and turn on the WiFi. Select the desired WiFi and connect through authentication.

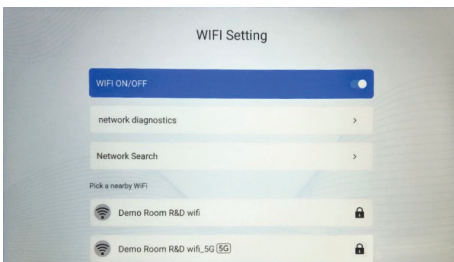


Bluetooth Settings:

- **Go to Settings > Bluetooth**
- Connect a Bluetooth speaker, headphone, or other compatible Bluetooth audio device to the projector.

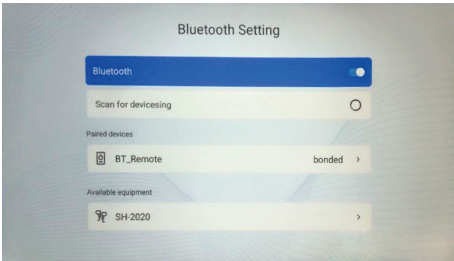


USB:

- Select the USB icon on the Home screen to access files stored on the connected USB device and browse or play video, audio, image and other supported files.

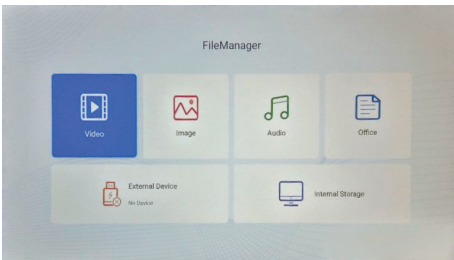


Power Menu:

- Press the Power button on the remote to access BT Speaker Mode, Power Off, or schedule options, then select the desired option.

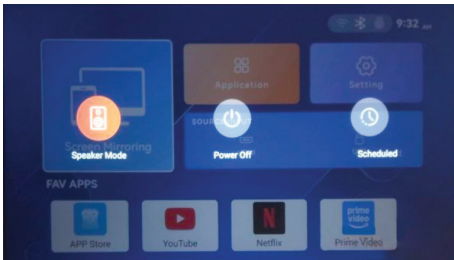

- **Power Button > Speaker Mode**
- Connect your phone or other compatible Bluetooth device to the projector and use the projector as a Bluetooth speaker.

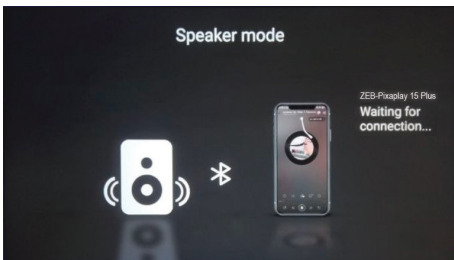

ISO 9001:2015 Certified Company
www.zebronics.com