



Smart LED Vertical Projector

**PixaPlay<sup>®</sup> 22**



## User Manual

[www.zebronics.com](http://www.zebronics.com)

Dear Customer,

Thank you for purchasing the **ZEB-Pixaplay 22 LED Projector**. Please read the user manual carefully before usage & save it for future reference.

**Note:**

- *To provide a stable power supply, kindly use the cable provided with the product and connect to a DC 19V 3.42A power source.*
- *Avoid the self-disassembly of the product as it results in voiding of the product's warranty.*
- *Avoid looking directly at the projector lens while it is active.*
- *Make sure that the projector's air vents are not blocked while in use. The device must be kept in a well ventilated surrounding for proper functioning.*
- *It is recommended to power OFF the projector after a continuous usage of 6 hours maximum.*
- *Place the projector away from water or other liquids. Avoid water accumulation and ensure good ventilation.*
- *In case of enquiry regarding the projector, email us at [enquiry@zebronics.com](mailto:enquiry@zebronics.com) or contact us at 044 4000 0004.*

## Features:

- Home Theater Projectors for Movies, TV & Gaming etc.
- Multi Connectivity (BT v5.1 | HDMI | USB | AUX OUT)
- Built in Speaker
- Remote Control
- Electronics Focus
- 3600 lumens
- Upto 406cm Screen Size
- FHD 1080p Support
- 30,000h lifelong LED lamp
- Quad Core Processor
- Smart Projector
- Dual band Connectivity (2.4GHz & 5GHz)
- Miracast
- IOS Screen mirroring
- APP Support
- Protective Sleeve With Carry loop

## Specification:

Screen size	: 63.5 - 406cm
Native Resolution	: 1280 x 720P
Max. Supported Resolution	: 1920 x 1080P (Max)
RAM	: 1 GB
Core Processor	: Quad Core Processor
Storage (ROM)	: 8 GB
Android Version	: 9.0
Wi-Fi Connectivity	: Dual band Connectivity (2.4GHz & 5GHz)



Bluetooth Version	: v5.1
Display Technology	: LED
Lifespan	: 30,000h
Brightness	: 3600 lumens
Contrast ratio	: 1000:1
Projection Distance	: 0.8m - 4.9m
Port Interface	: HDMI / USB / AUX OUT
Video file format	: MOV, AVI, H.264, MP4, MKV, FLV, MPEG 1, MPEG 2
Input Voltage	: DC 19V 3.42A
Product Dimension (Dia x H)	: 12 x 18 cm
Net. weight	: 790g

### **Package Contents:**


Projector	: 1 U
Remote Control	: 1 U
Power Adapter	: 1 U
Cotton Swab Pack	: 1 U
Protective Sleeve	: 1 U
HDMI Cable	: 1 U
QR Code Guide	: 1 U



# Product Description

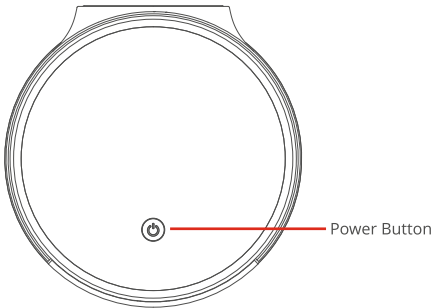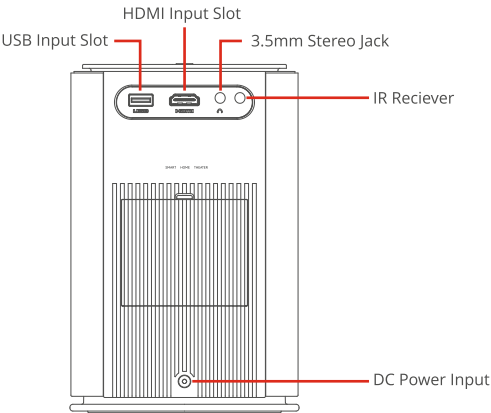


## Remote Control

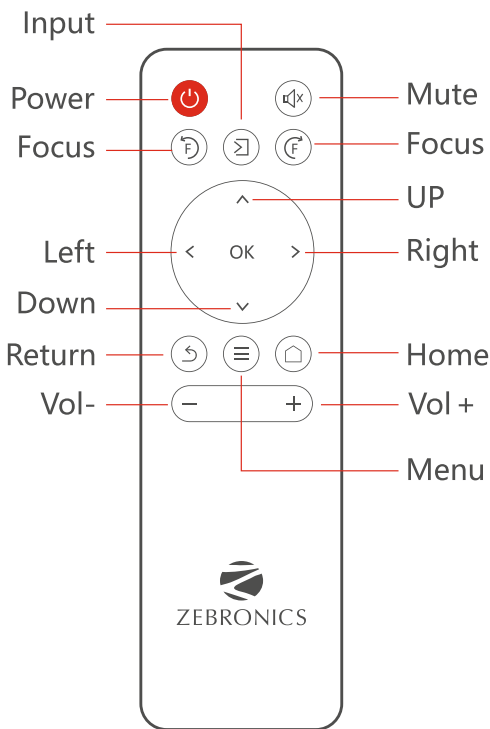

### **NOTE:**

1. To avoid power shortage, please do not mix and use the old and new battery.
2. To avoid battery leakage corrosion, if do not use remote control for a long time, please take the battery out.

# Projector Interface

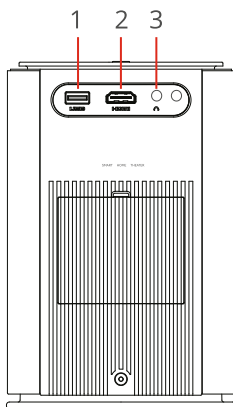

1



2




3



## Setting Up the Projector

1. Connect the adapter to the socket and the DC pin to the projector and turn it ON.
2. Before turning ON, make sure to place it in a flat surface for a proper projection then Press the power button / turn it on by using the remote.
3. Align the projector as shown in the image below to ensure proper projection.

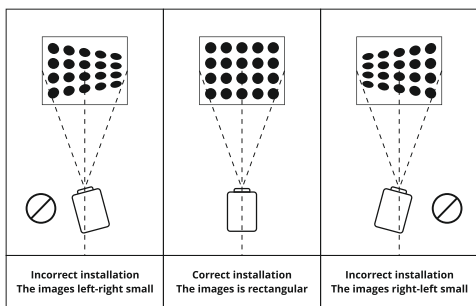

## Focus and Keystone Adjustment


**Note:** There is no manual focus, it has only electronic focus.  
Do not rotate the lens or it will be damaged.



Once the projector turns ON, wait till it gets loaded. Only after a proper boot-up you'll be able to adjust the focus lens using using the focus control buttons of the remote as shown in the image above.

## Projection


The projection adjustments like keystone adjustment, Zoom Out can be done using the projection tabs in the settings.

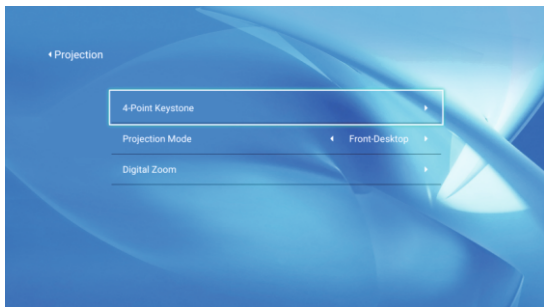


1. Digital 4D Keystone: While most of the Projector comes with only Manual Vertical Trapezoid Correction, resulting in blurred corners. **ZEB-PixaPlay 22** has Digital Horizontal as well as Vertical Keystone Correction, giving you sharp & clear corners.
2. Digital Zoom: With a click of Remote, you can scale down the image to perfectly fit within screen frame.

## Android Home

1. Once the projector is turned on you'll be directed to the home screen.
2. The Home screen displays a list of Installed Apps, Playstore, Settings Menu, File Manager, Input Source - HDMI, etc.

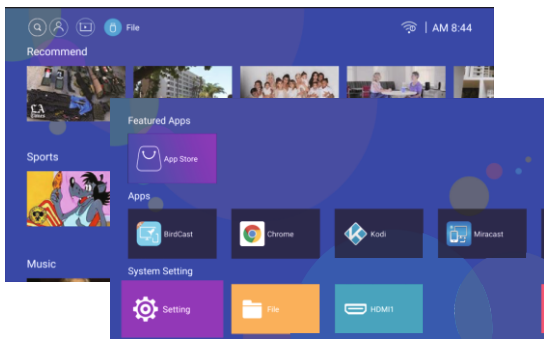

## Android Settings


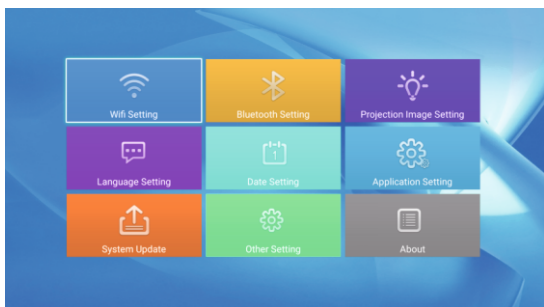


Open the homepage, select settings main menu found in the last section of the homepage.

This settings houses the following submenus:



Network settings, Bluetooth settings, projection settings, language settings, date settings, application settings, system update, other settings.

## USB Connections

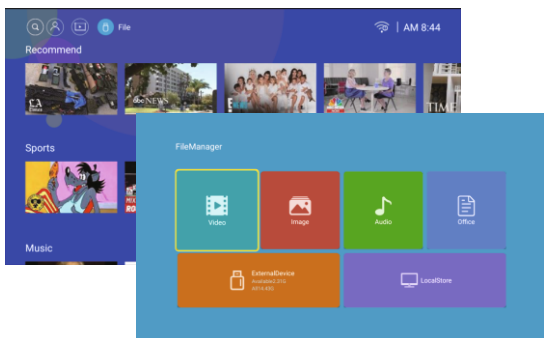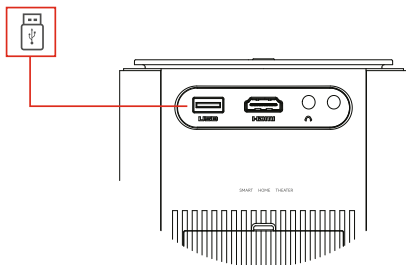

Connect the USB drive with the content to the projector. You can access the USB drive by either clicking on the USB icon that pops up on the homepage or by using the file menu next to the settings icon. The above mentioned screen will pop up. You can easily access the media either category wise-videos / Photos or from the folder itself and play them.


## HDMI Interface

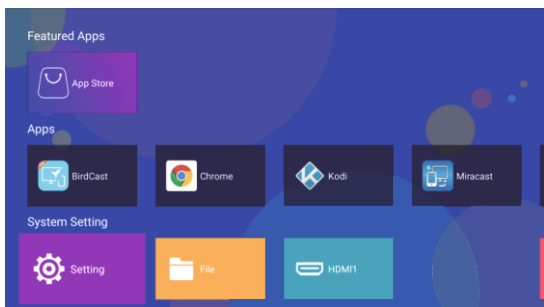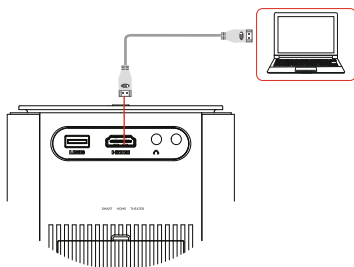

Once the HDMI interface is connected to the projector, you will need to select the specific signal source as the input. After connected the content played on the source will be streamed on the projector.



## Projector distance & size

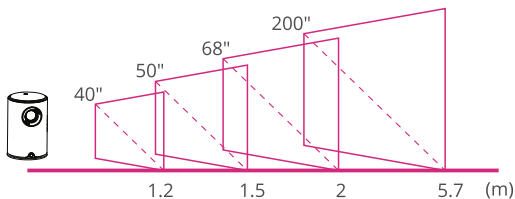

### **Note:**

*Due to optical device error of about 3%, the above data is for reference only, Please use actual measurement when installing the device.*

**ISO 9001:2015 Certified Company**  
**[www.zebronics.com](http://www.zebronics.com)**