

ZEBRONICS

Smart LED Projector

HiFi Pixa NPlay 26



User Manual

www.zebronics.com

Dear Customer,
Thank you for purchasing the **Zeb-Pixaplay 26 Smart LED Projector**. Please read the user manual carefully before usage and save it for future reference.

Note:

** To provide a stable power supply, kindly use the cable provided with the product and connect to a AC 100-240V, 50/60Hz power source.*

** Avoid the self-disassembly of the product as it results in the voiding of the product's warranty.*

** Avoid looking directly at the projector lens while it is active.*

** Please ensure that the air vents of the projector are not blocked while it is in use. It is essential to keep the device in a well-ventilated environment to ensure proper functioning.*

** It is recommended to power OFF the projector after a continuous usage of maximum 6 hours.*

** Place the projector away from water or other liquids. Avoid water accumulation and ensure good ventilation.*

** In case of enquiry regarding the projector, email us at enquiry@zebronics.com or contact us at 044 4000 0004.*

Features :

- Multi Connectivity (BT v5.0 | HDMI (ARC) | Dual USB: 1 x USB | 1 x USB (power) | AUX OUT)
- Home Theater Projectors for Movies, TV & Gaming etc..
- Powerful Speaker With Passive Radiator
- Wide Compatibility
- Ceiling Mountable
- Remote Control (BT + IR)
- Electronics Focus (via remote)
- Auto Focus Technology
- Auto Keystone Adaptation
- Miracast
- Dual band Connectivity (2.4GHz & 5GHz)
- FHD 1080p (Native)
- 30,000h lifelong LED lamp
- APP Support
- Quad Core Processor
- Netflix | Amazon Prime Video | YouTube

Specification:


| | |
|---------------------------|--|
| Screen size | : 111 - 508cm |
| Native Resolution | : 1920 x 1080 FHD |
| Max. Supported Resolution | : 1080p (max) |
| RAM | : 1 GB |
| Core Processor | : Quad Core Processor |
| Storage (ROM) | : 8 GB |
| WI-Fi Connectivity | : Dual band Connectivity (2.4GHz & 5GHz) |
| Bluetooth Version | : v5.0 |

Display Technology : LED
Lifespan : 30,000h
Brightness : 5000 lumens
Contrast ratio : 1000:1
Projection Distance : 1.3m - 5.7 m
Port Interface : HDMI (ARC), Dual USB: 1
x USB | 1 x USB (power), AUX OUT
Video file format : AVI, MP4, MPG, MPEG1,
MPEG2, MKV, WMV, MOV, FLV, H.264
Input Voltage : AC 100-240V, 50/60Hz
Product Dimension
(W x D x H) : 22.4 x 22 x 13.5 cm
Net. weight : 2 Kg


Package Contents:

Projector : 1 U
Remote Control : 1 U
Power Cord : 1 U
Cotton Swab Pack : 1 U
HDMI Cable : 1 U
QR Code Guide : 1 U

Product description:

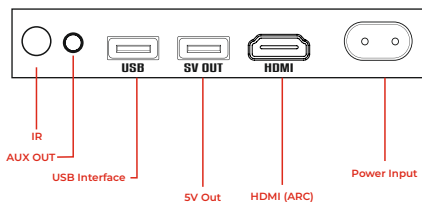



Remote Control

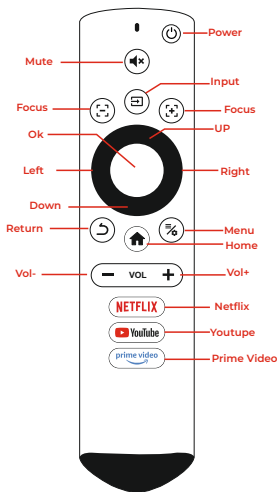

NOTE:


1. To avoid power shortage, do not mix and use the old and new batteries
2. To avoid battery leakage corrosion, if the remote controller is not used for a long time, please take the battery out

Product Interface

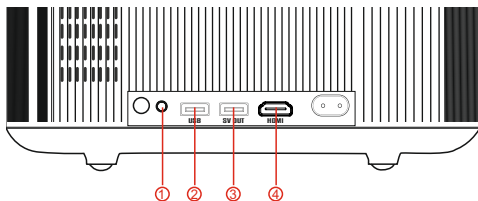


Setting Up the Projector

1. Before turning it on, place the projector on a flat surface to ensure proper projection
2. Connect the power cord to the projector and plug it into a socket to supply power. Turn the projector on.
3. Align the projector as indicated in the image below to ensure the proper projection.

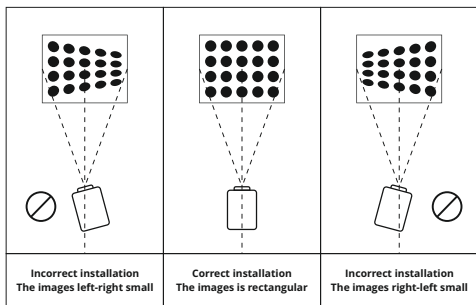

Focus and Keystone Adjustment:

Note: There is no manual focus, it has only electronics focus. **Do not rotate the lens or it will get damaged.**




Once the projector turns ON, wait till it gets loaded. Only after boot-up you'll be able to adjust the focus using the focus control buttons of the remote as mentioned in the image.

Electronics Focus


Press the “☺” and “☹” buttons on remote control to adjust the clarity



Auto Focus


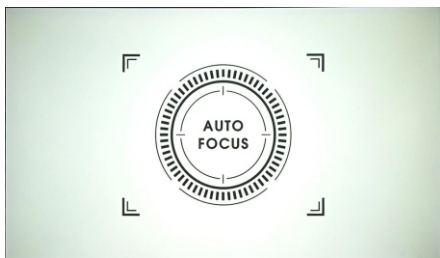


Manual Keystone

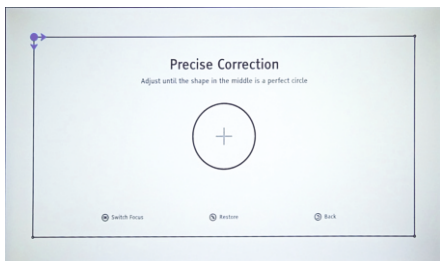


Bluetooth remote pairing

Select Remote Control at the top of the home page and the pairing interface will appear

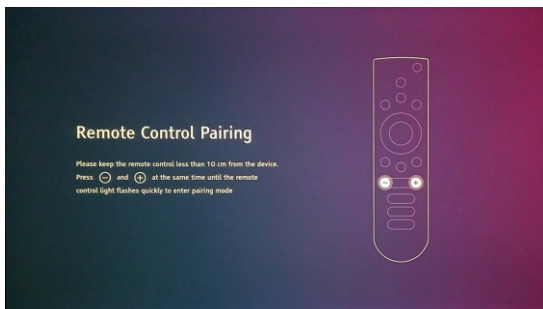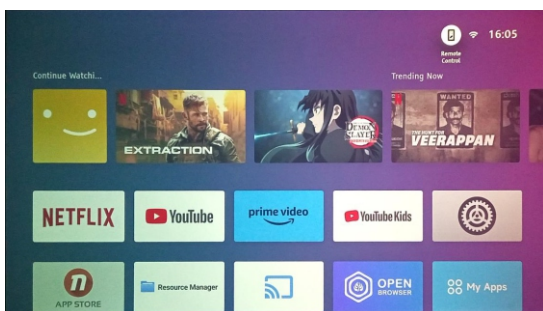

Settings

Open the homepage and select Settings. This setting houses the following sub-menus: Network & Internet, Bluetooth, Input / HDMI, Picture, Display & Sound, and System.

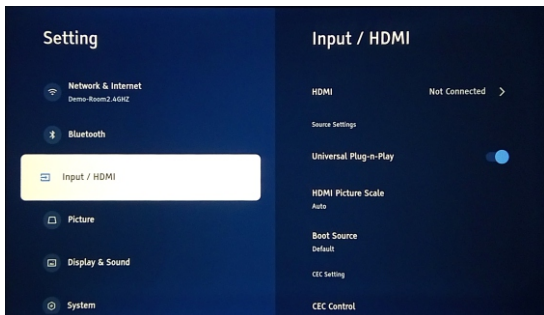

Projection:

The projection adjustments like Keystone adjustment, zoom out can be done using the projection tabs in the settings.


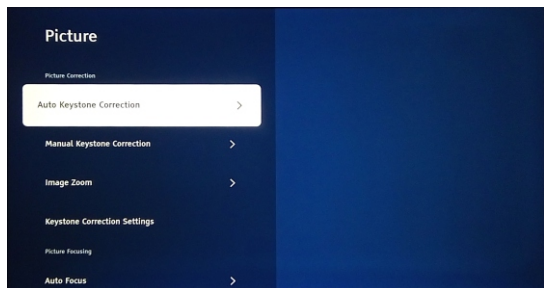


Image Zoom: with a click of remote, you can scale down the image to perfectly fit within the screen frame.

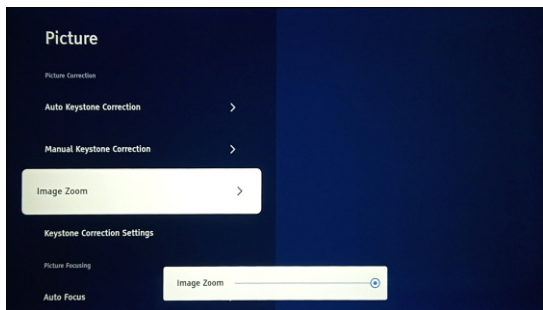

Digital 4D keystone: While most of the projector comes with only manual vertical trapezoidal correction, resulting in blurred corners, **ZEB-Pixaplay 26** has 4D keystone corrections, giving you sharp and clear corners.


Home Screen:

* Once the projector is turned on you'll be directed to the home-screen.


* The Home screen displays a list of installed apps, Settings menu, Resource manager and remote control.

HDMI Interface:


Once the HDMI interface is connected to the projector, you will need to select the specific signal source as the input. After connecting the content played on the source will be streamed on the projector.

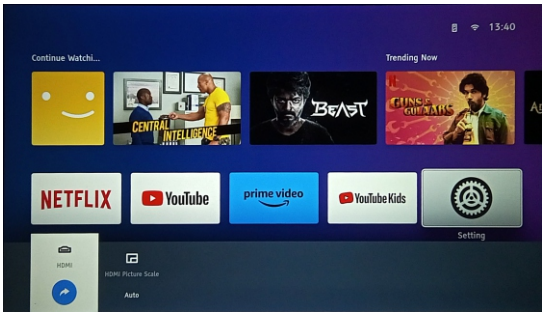

USB Connections

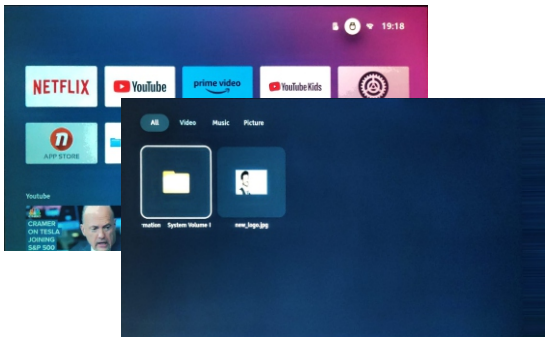

Projector distance & size

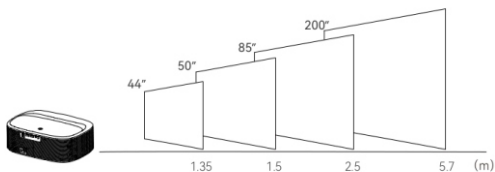

Note:

Due to optical device error of about 3%, the above data is for reference only, Please use actual measurement when installing the device.

ISO 9001:2015 Certified Company

www.zebronics.com