

 ZEBRONICS

Smart LED Projector

MPix  
NPlay **29**



**User Manual**

[www.zebronics.com](http://www.zebronics.com)

Dear Customer,

Thank you for purchasing the **ZEB-Pixaplay 29 Smart LED Projector**. Please read the user manual carefully before usage & save it for future reference.

**Note:**

- *To provide a stable power supply, kindly use the cable provided with the product and connect to a AC 100-240V, 50/60Hz power source.*
- *Avoid the self-disassembly of the product as it results in voiding the product's warranty.*
- *Avoid looking directly at the projector lens while it is active.*
- *Make sure that the projector's air vents are not blocked while in use. The device must be kept in a well ventilated surrounding for proper functioning.*
- *It is recommended to power OFF the projector after a continuous usage of 6 hours maximum.*
- *Place the projector away from water or other liquids. Avoid water accumulation and ensure good ventilation.*
- *In case of enquiry regarding the projector, email us at [enquiry@zebronics.com](mailto:enquiry@zebronics.com) or contact us at 044 4000 0004.*

## Features:

- Multi Connectivity (BT v5.0 | HDMI IN x 2  
USB x 2 | AUX OUT)
- Home Theatre Projectors for Movies, TV & Gaming etc.
- Powerful Speaker
- Wide Compatibility
- Remote Control
- Electronics Focus (via remote)
- Auto Focus Technology
- Quad Core Processor
- Auto Keystone Adaptation
- Miracast
- Dual band Connectivity (2.4GHz & 5GHz)
- FHD 1080p (Native)
- 30,000h lifelong LED lamp
- Smart Projector
- App support
- Indoor & Outdoor modes

## Specification:



Screen size	: 99- 508cm
Native Resolution	: 1920 x 1080 FHD
Max. Supported Resolution	: 1080p (max)
RAM	: 1 GB
Core Processor	: Quad Core Processor
Storage (ROM)	: 8 GB
WI-Fi Connectivity	: Dual band Connectivity (2.4GHz & 5GHz)
Bluetooth Version	: v5.0

Display Technology	: LED
Lifespan	: 30,000h
Brightness	: 6500 Lumens (Max.)
Contrast ratio	: 2000:1
Projection Distance	: 1.2m - 5.9 m
Port Interface	: AUX OUT, USB x 2, HDMI IN x 2
Video file format	: FLV, MP4, MKV, MOV, 3G2, MPG, VOB, SWF, TS
Input Voltage	: AC 100-240V, 50/60Hz
Product Dimension (W x D x H)	: 31.7 x 9.8 x 39.4 cm (Folded)
Net. weight	: 3.33 kg


### **Package Contents:**

Projector	: 1 U
Remote Control	: 1 U
Power Cord	: 1 U
Cotton Swab Pack	: 1 U
HDMI Cable	: 1 U
QR Code Guide	: 1 U

# Product Description

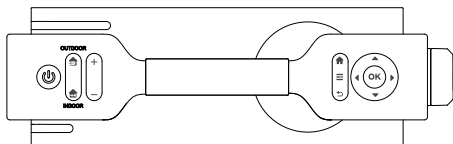


## Remote Control

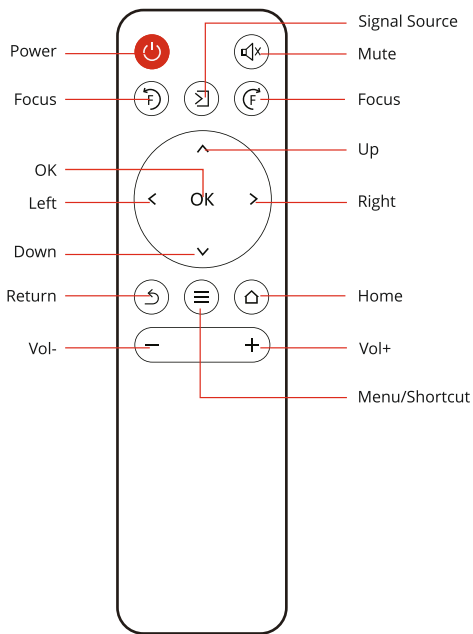


### **NOTE:**

1. To avoid power shortage, do not mix and use the old and new batteries.
2. To avoid battery leakage corrosion, if the remote controller is not used for a long time, please take the battery out.

# Projector Interface

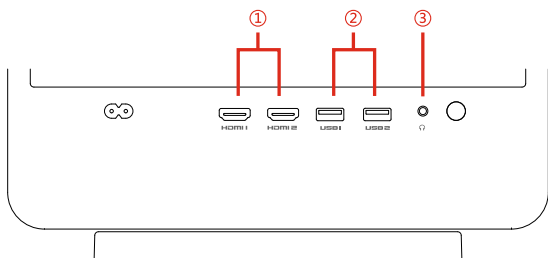

1



2




3




## Projector Assembly


- ① The base is aligned with the hole at the bottom of the machine.

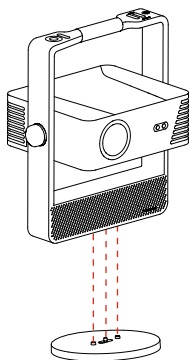

- ② Tighten the screws at the bottom of the base




- ③ Complete assembly





## Setting Up the Projector

1. Before turning ON, make sure to place it in a flat surface for a proper projection then press the power button / turn it on by using the remote.
2. Connect the power cord to the socket of the projector and turn it ON.
3. Align the projector as shown in the image below to ensure proper projection.

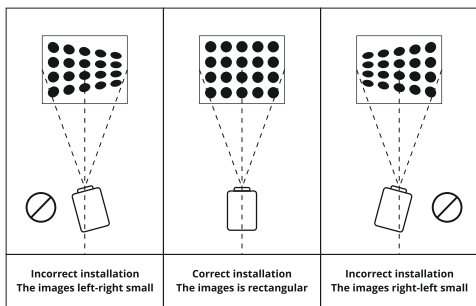

### Focus and Keystone Adjustment:


*Note: There is no manual focus, it has only electronics focus. Do not rotate the lens or it will get damaged.*



Once the projector turns ON, wait till it gets loaded. Only after boot-up you'll be able to adjust the focus using the focus control buttons of the remote as mentioned in the image.

## Adjusting Projector's Angle


Step 1:  
Loosen the Knob

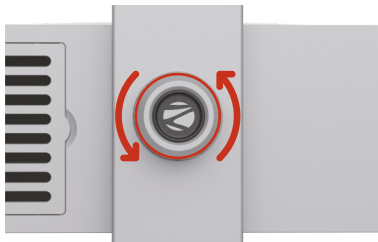

Step 2:  
Adjust Projector's Projection Angle




Step 3:  
Tighten the knobs to keep the projection angle

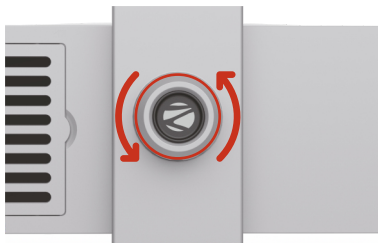

## Projection

The projection adjustments like keystone adjustment, Zoom Out can be done using the projection tabs in the settings.

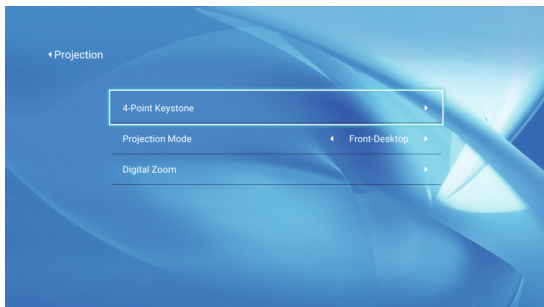

**Digital 4D keystone:** While most of the Projectors come with only manual vertical trapezoid correction, resulting in blurred corners, **ZEB-PixaPlay 29** has digital horizontal as well as vertical keystone correction, giving you sharp & clear corners.


**Digital Zoom:** With a click of Remote, you can zoom in or zoom out the image to perfectly fit within your screen frame.

## Android Home

1. Once the projector is turned on you'll be directed to the home screen.
2. The Home screen displays a list of Pre-Installed Apps, Playstore, Settings Menu, File Manager, Input Source - HDMI, etc.



## Android Settings


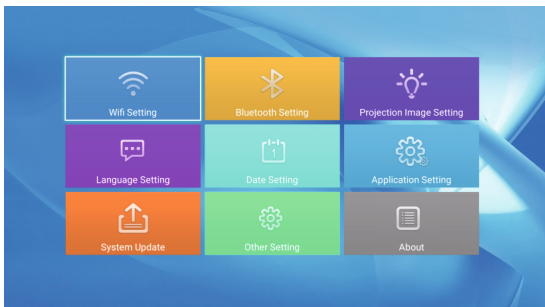


Open the homepage, select settings main menu found in the last section of the homepage.

This settings houses the following submenus:



Network settings, Bluetooth settings, projection settings, language settings, date settings, application settings, system update, other settings.

## USB Connections

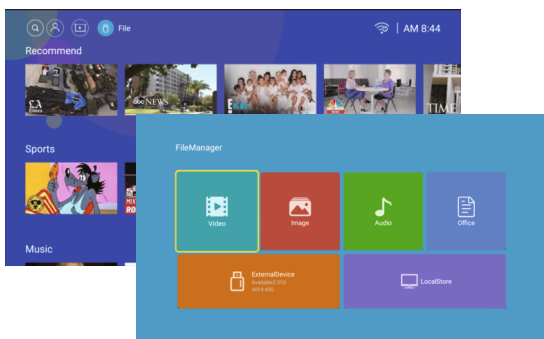

Connect the USB drive with the content to the projector. You can access the USB drive by either clicking on the USB icon that pops up on the homepage or by using the file menu next to the settings icon. The above mentioned screen will pop up. You can easily access the media either category wise-videos / Photos or from the folder itself and play them.


## HDMI Interface

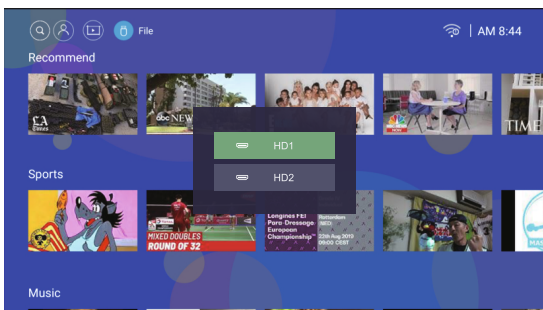


Once the HDMI interface is connected to the projector, you will need to select the specific signal source as the input. After connected the content played on the source will be streamed on the projector.

# Settings

The settings menu is available at the bottom of the home screen as shown in the image below. This menu contains the settings for Wi-Fi, BT, Projection image, Language, Date, System Update, etc.,

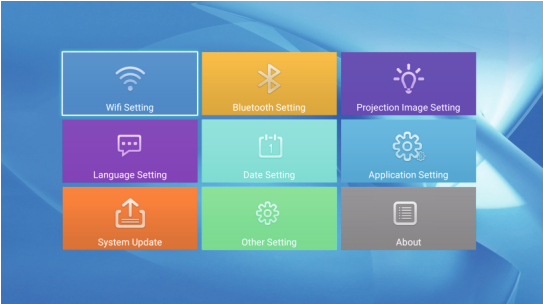

## Projector distance & size

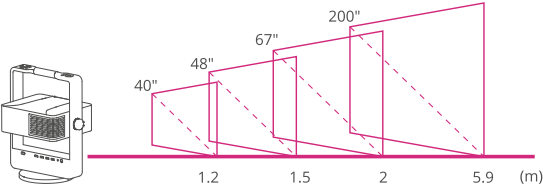

**Note:**

*Due to optical device error of about 3%, the above data is for reference only, Please use actual measurement when installing the device.*

**ISO 9001:2015 Certified Company**  
**[www.zebronics.com](http://www.zebronics.com)**

