



LED Projector

**Mini Pixa
Play 51**



User Manual

www.zebronics.com

Dear Customer,

Thank you for purchasing the **ZEB-Pixaplay 51 LED Projector**. Please read the user manual carefully before usage & save it for future reference.

Note:

- *To provide a stable power supply, kindly use the adapter provided (**DC24V, 2A**) with the product and connect to a AC 100-240V, 50/60Hz power source.*
- *Avoid the self-disassembly of the product as it results in the failure of Warranty.*
- *Avoid looking directly at the projector lens while it is active.*
- *Make sure that the projector's air vents are not blocked while in use. The device must be kept in a well insulated surrounding for proper functioning.*
- *It is recommended to power OFF the projector after a continuous usage of 6 hours.*
- *Place the projector away from water or other liquids. Avoid water accumulation and ensure good ventilation.*
- *In case of enquiry regarding the projector, email us at enquiry@zebronics.com or contact us at 044 4000 0004.*

Features :

- Home Theater Projectors for Movies, TV & Gaming etc..
- Projector comes with mSD, AV IN, AUX OUT, USB, HDMI
- Built in Speaker
- Remote Control
- Compact Design


Specification:






Screen size	: 51-305cm
Native Resolution	: 1280 x 720P
Max. Supported Resolution	: 1920 x 1080P (Max.)
Display Technology	: LCD
Lifespan	: 50,000h
Brightness	: 2400 Lumens
Contrast ratio	: 1000:1
Projection Distance	: 1.0m - 4.0m
Port Interface	: mSD, AV IN, AUX OUT, USB, HDMI
Video file format	: 3GP, AVI, DIVX, H264, MOV, MP4, MPEG1, MPEG2, MKV, VOB
Input Voltage	: DC20V, 2A
Product Dimension (W x D x H)	: 14.5 x 12.2 x 6.2 cm
Net. weight	: 364g

Package Contents :

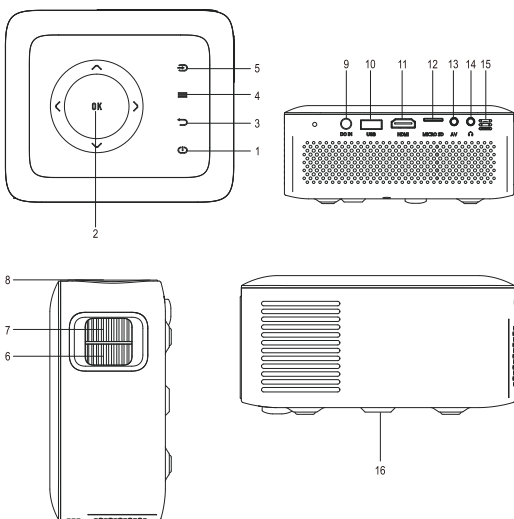
Projector	:1 U
Remote Control	:1 U
Power Adapter	:1 U
Cleaning cloth	:1 U
HDMI Cable	:1 U
QR code guide	:1 U

Product Description :




1. STANDBY  AWAKE
2. NAVIGATION 
3. RETURN 
4. MENU 
5. INPUT SOURCE 
6. MANUAL Keystone
7. FOCUS Knob
8. LENS
9. DC IN Jack
10. USB Port
11. HDMI
12. MICRO SD
13. AV INPUT
14. AUDIO OUTPUT
15. IR Window
16. ANGLE ADJUSTMENT SCREW

Product Overview (Cont.)

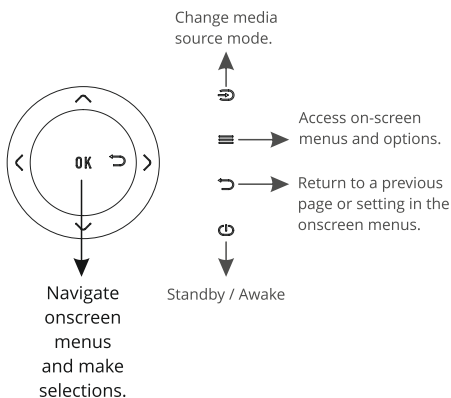

Remote Control

Your projector comes with a Remote Control to access and control your projector from a distance. (Batteries not included).

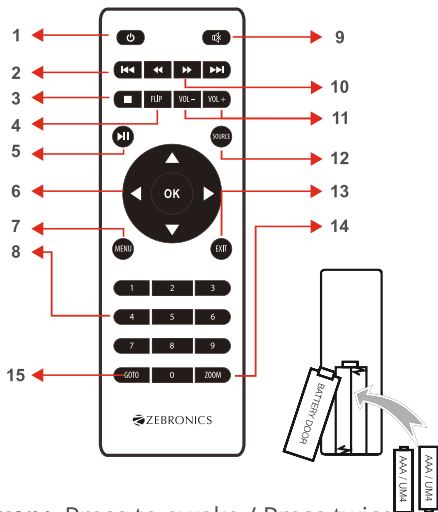

- 1. Power** : Press to awake / Press twice to standby.
- 2. ⏮ Previous / Next ⏭** : Skip between chapters or tracks.
- 3. ■ Stop** : Stop playback.
- 4. Flip** : Flip display image 180°.
- 5. ▶|| Play/Pause** : Play or pause an individual chapter or track.
- 6. Arrows/OK** : Navigate and confirm selections in Settings and other menus.
- 7. Menu** : Access projector Settings.

8. Go To/Number Keypad : Enter specific chapter or track numbers. Use Play button to begin playing.

9. Mute : Mute / Unmute volume.

10. « Back / Fwd » : Search through an individual chapter or track.

11.VOL+ / VOL- : Adjust audio level.

12.Source : Select media source

13.Exit : Exit menus.

14.Zoom : Zoom display image in or out.


15.Goto : Seek to the time position in the media.

Setting Up the Projector :


1. Connect the power adaptor to the projector and turn it ON, You'll be indicated with the LED on the rear side.

2. Before turning ON, make sure to place it in a flat surface for a proper projection then Press the power button / turn it on by using the remote.

3. Align the projector as shown in the image below to ensure proper projection.

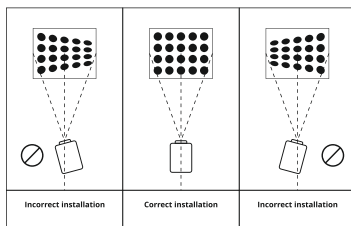


Projector distance & size :

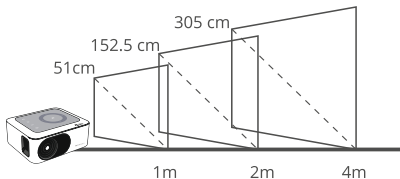

Note:


Due to optical device variation of about 3%, the above data is for reference only.

Focus Adjustment

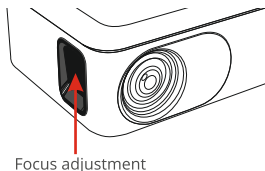

Once the projector turns ON, wait till it boots up. After boot-up adjust the focus knob in the projector until the images/video is clear.


Home Interface

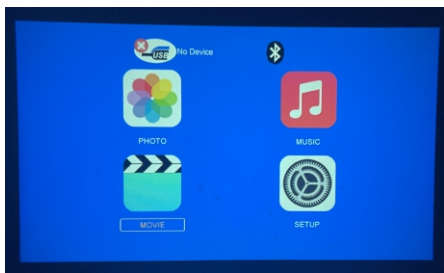

This dashboard above appears when you turn on your projector. From here you can view other media devices and menu options.

SETTING - PICTURE :

1. Press the MENU button on the Remote Control.
2. With the navigation keys, Press the RIGHT arrow button to enter PICTURE settings.
3. To navigate back to PICTURE/AUDIO/OPTION, with nothing selected, Press **MENU** button.

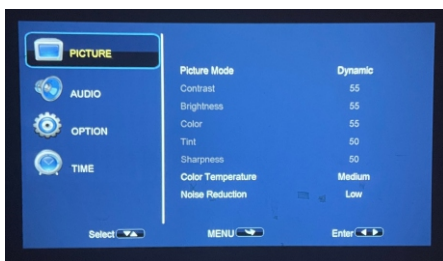

PICTURE MODES :

Standard, Dynamic, Mild, User (contrast, brightness, sharpness, colour).



COLOUR TEMP :


Adjust between Medium, Cool, Warm.

NOISE REDUCTION :

Off, Low, Middle, High.

SETTING - AUDIO :

1. Press the **MENU** button on the Remote Control.
2. With the navigation keys. Press the **DOWN**  button. when on **AUDIO**, Press the **RIGHT**  arrow button to enter **AUDIO** settings.
3. To navigate back to PICTURE/AUDIO/OPTION, with nothing selected, Press **MENU** button.

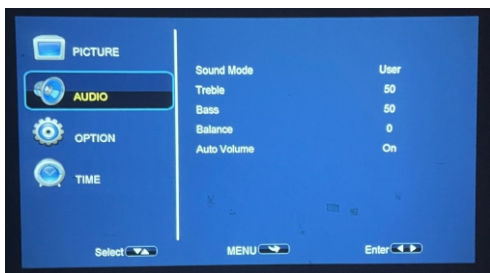



SOUND MODES:

Standard, Music, Movie, Sports, User When on User mode, you can adjust more settings such as Treble & Bass In user mode.

BALANCE: Adjust the Audio Balance of the left or right speaker.


SETTING - OPTION :

1. Press the **MENU** button on the Remote Control.

2. With the navigation keys, Press the **DOWN**  button, when on **OPTION**, Press the **RIGHT**  arrow button to enter **OPTION** settings.

2.To navigate back to

PICTURE/AUDIO/OPTION, with nothing selected, Press **MENU** button.

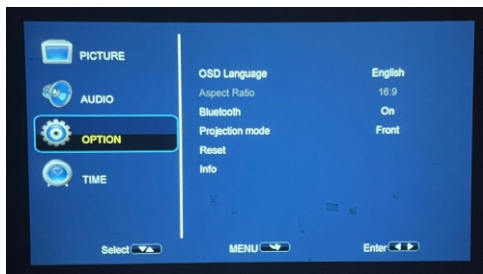

OSD LANGUAGE: Adjust between Languages
English (default)

ASPECT RATIO: Adjust video aspect ratio

PROJECTION MODE: Front, F/Ceiling,
Rear/ceiling, Rear.



Bluetooth : Access the bluetooth enabled
devices to pair with the projector

RESET: Press Yes to reset your projector
settings to factory default.


INFO: Display information about the projector

SETTING - TIME :

1. Press the **MENU** button on the Remote
Control.

2. With the navigation keys, Press the **DOWN**  button, when on **TIME**, Press the **RIGHT**  arrow button to enter **TIME** settings.

3. To navigate back to **PICTURE/SOUND/OPTION**, with nothing selected, Press **MENU** button.

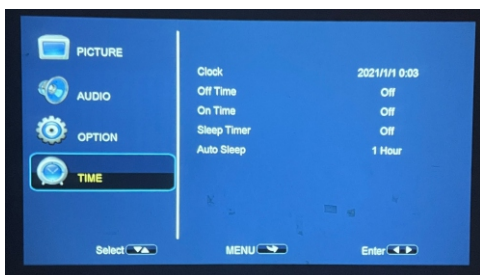

CLOCK : Select time/date for your projector.

OFF TIME : Select turn off time to Off, Once, Every day, Hour and Minutes.

ON TIME : Select on time and setup the Day, Month, Year, Hour and Minutes.

SLEEP TIMER : Select turn off time to Off, using the provided time options.

AUTO SLEEP : Select auto sleep function to Off, 1 hour, 2hours, 4hours, 8hours.

ISO 9001:2015 Certified Company

www.zebronics.com