



Smart LED Projector

PixaPlay[®] 75



User Manual

www.zebronics.com

Dear Customer,

Thank you for purchasing the **ZEB-Pixaplay 75 Smart LED Projector**. Please read the user manual carefully before usage & save it for future reference.

Note:

- *To provide a stable power supply, kindly use the cable provided with the product and connect to a AC 100-240V, 50/60Hz power source.*
- *Avoid the self-disassembly of the product as it results in voiding of the product's warranty.*
- *Avoid looking directly at the projector lens while it is active.*
- *Make sure that the projector's air vents are not blocked while in use. The device must be kept in a well ventilated surrounding for proper functioning.*
- *It is recommended to power OFF the projector after a continuous usage of 6 hours maximum.*
- *Place the projector away from water or other liquids. Avoid water accumulation and ensure good ventilation.*
- *In case of enquiry regarding the projector, email us at enquiry@zebronics.com or contact us at 044 4000 0004.*

Features:

- 4600 Lumens
- 4K Support
- Upto 508 cm Screen Size

- Auto Keystone Adaptation
- Auto Focus Technology
- 50,000h Lifelong LED Lamp
- Telescopic Height Adjustment
- 90° Tilt Mechanism
- BT v5.0 | HDMI | USB | AUX OUT
- Built in Speaker
- Dual band Connectivity (2.4GHz & 5GHz)
- Remote Control
- Quad Core Processor
- Miracast
- IOS Screen Mirroring
- Smart Projector
- APP Support
- Wall Mountable
- Carry Loop

Specification :



Screen Size	: 127-508cm
Native Resolution	: 1280 x 720p HD
Max. Supported Resolution	: 4K
RAM	: 1 GB
Core Processor	: Quad Core Processor
Storage	: 8 GB
Android Version	: 13.0
Wi-Fi Connectivity	: Wi-Fi 6 - Dual band Connectivity (2.4GHz & 5GHz)
BT Version	: v5.0
Lamp Lifespan	: 50,000h

Brightness	: 4600 Lumens
Contrast Ratio	: 3000:1
Projection Distance	: 1.5m - 5m
Port Interface	: USB x 1, HDMI IN x 1, AUX OUT
Video File Format	: VP9, AV1, AVS2, AVS3, H.265
Input Voltage	: AC 100-240V, 50/60Hz
Product Dimension	: 12 x 11.7 x 19.8 cm (W x D x H)
Net. Weight	: 1.22kg


Package Contents:

Projector	: 1 U
Remote Control	: 1 U
Power Cord	: 1 U
HDMI Cable	: 1 U
Cotton Swab Pack	: 1 U
QR Code Guide	: 1 U

Product Description :

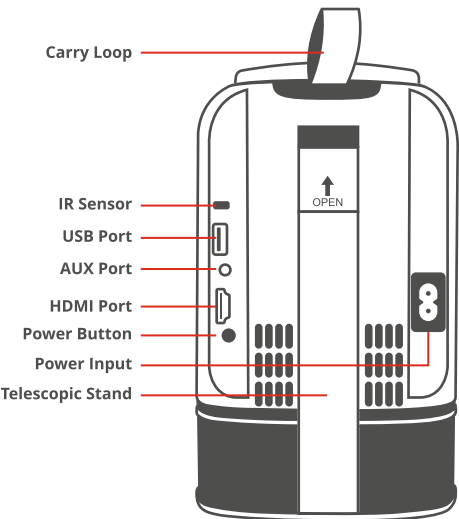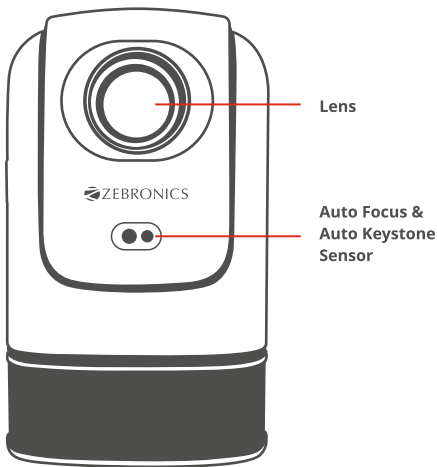

Remote Control

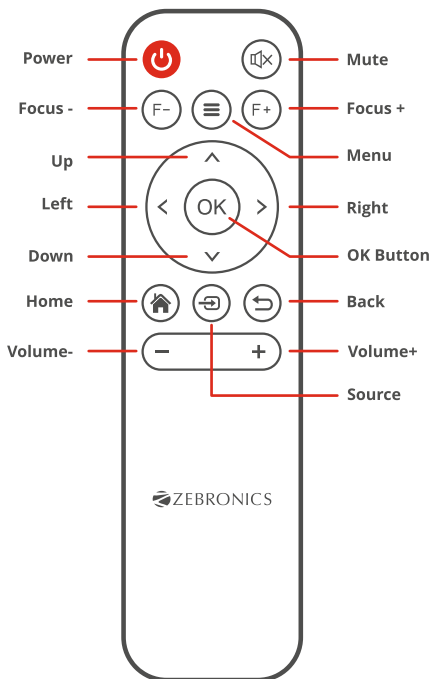


NOTE :


1. To avoid power shortage, please do not mix and use the old with the new battery.
2. To avoid battery leakage corrosion, when the remote control is not used for a long time, please take the batteries out.

Setting Up the Projector :

1.Before turning on make sure to place it in a flat surface for proper projection, then press the power button on the projector or on the remote.

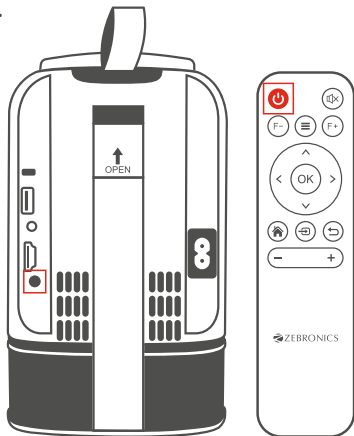


2.Align the projector as shown in the image below to ensure proper projection.

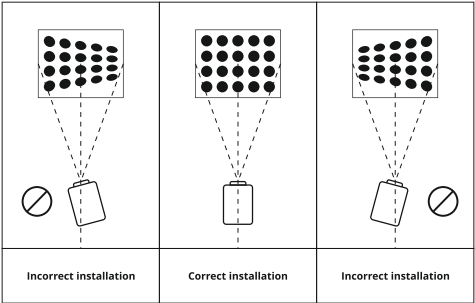

Projector distance & size :

The recommended projection screen size is 127 - 508 cm. For an improved viewing experience, it is recommended to use the projector in a room that provides as much darkness as possible.

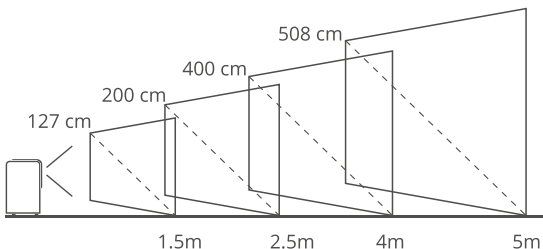


Note: The above mentioned image is for indicative purpose alone while in actual product, the distance to screen size may vary from the values mentioned above.

Keystone Adjustment:

The 4 point keystone can be adjusted in Display settings.

Android Home :

1. Once the projector is turned on, the projector will lead you to the home screen.
2. The home screen displays Apps, Settings, Source, File Manager, App Store etc.,
3. You can also change the backdrop and sound effects of the Home Screen.

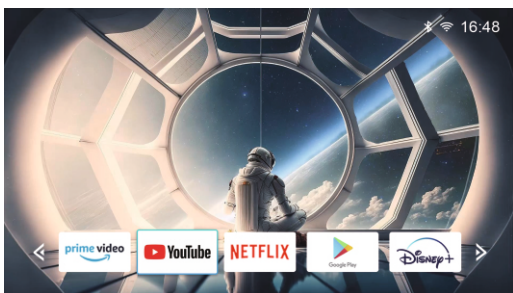


Settings :

Switch to Homepage, then go to the settings main menu. This menu contains sub-menus like General Settings, Display Settings and System Configurations.




USB Connection :

Plug the USB to the port present at the rear side of the projector. Now navigate to the source tab present in the homepage, then select USB sub-menu.

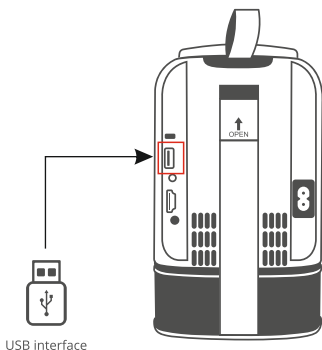


HDMI Connection :

Once the HDMI is connected to the projector, you will need to select the specific signal source as input. After connecting, the content played on the source will be streamed on the projector.

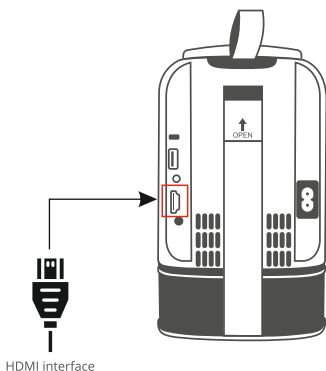

Bluetooth Settings :

1. Go to Settings > General Settings > Bluetooth Settings.
2. Select the device scan and search for nearby bluetooth devices.
3. Choose the desired bluetooth device to pair and connect.

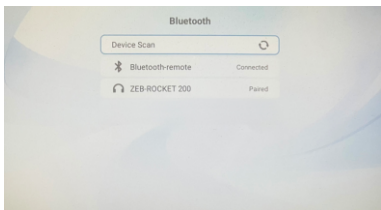

Network Settings :

1. Go to Settings > General Settings > Network Settings.
2. Go to WLAN On/Off setting and Turn it ON.
3. Select the Desired network and input password to connect to the network



ISO 9001:2015 Certified Company
www.zebronics.com