

ZEBRONICS

Smart Projector
PixaPlay[®] 76B



User Manual

www.zebronics.com

Dear Customer,

Thank you for purchasing the **ZEB-PixaPlay 76B Smart Projector**. Please read the user manual carefully before usage & save it for future reference.

Note:

- *To provide a stable power supply, kindly use the power adapter provided with the product and connect to a AC 100-240V, 50Hz power source.*
- *Avoid the self-disassembly of the product as it results in the failure of Warranty.*
- *Avoid looking directly at the projector lens while it is active.*
- *Make sure that the projector's air vents are not blocked while in use. The device must be kept in a well ventilated surrounding for proper functioning.*
- *It is recommended to power OFF the projector after a continuous usage of 6 hours.*
- *Place the projector away from water or other liquids. Avoid water accumulation and ensure good ventilation.*
- *In case of enquiry regarding the projector, email us at enquiry@zebronics.com or contact us at 044 4000 0004.*

Features :

- Home Theater Projectors for Movies, TV & Gaming etc..
- 4K Support
- 1080p (Support)
- Upto 381cm Screen Size
- 4000 Lumens
- Auto Keystone Adaptation*
- 50000h Lifelong LED Lamp
- 200° Tilt Mechanism
- Multi Connectivity (BT v5.4 | HDMI | USB | AUX OUT)
- Built in Speaker
- Dual band Connectivity (2.4GHz & 5GHz)
- Remote Control
- Quad Core Processor
- Miracast
- IOS Screen Mirroring
- Smart Projector
- APP Support
- Built-in Battery
- Upto 3h** Backup

**For vertical adjustment only.*

*** Usage in Recommended Battery Mode*

Specification :


Model	: ZEB-SSLP 1
Screen size	: 101.6 - 381 cm
Native Resolution	: 1280 x 720p

Max. Supported Resolution	: 4K
RAM	: 1 GB
Core Processor	: Quad Core Processor
Storage (ROM)	: 8 GB
Android version	: 11.0
Wi-Fi Connectivity	: Wi-Fi 6 - Dual band Connectivity (2.4GHz & 5GHz)
Bluetooth Version	: v5.4
Lamp Lifespan	: 50,000 h
Brightness	: 4000 Lumens
Contrast ratio	: 3000:1
Projection Distance	: 0.9 - 5m
Port Interface	: BT v5.4 HDMI USB AUX OUT
Video file format	: AVI MKV MP4 MOV MPG MPEG
Input Voltage	: DC 15V=4A
Product Dimension	: 10.5 x15.5 x14cm (W xDx H)
Net. weight	: 682g


Package Contents:

Projector	: 1 U
Remote Control	: 1 U
Power Adapter	: 1 U
HDMI Cable	: 1 U
Cleaning Cloth	: 1 U
QR code Guide	: 1 U

Product Description:

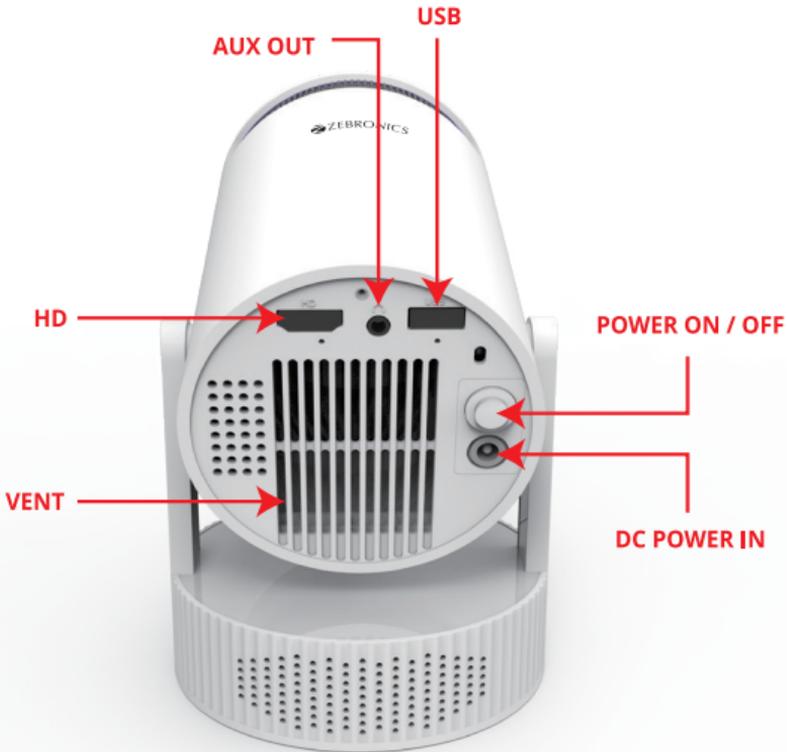


Remote Control:

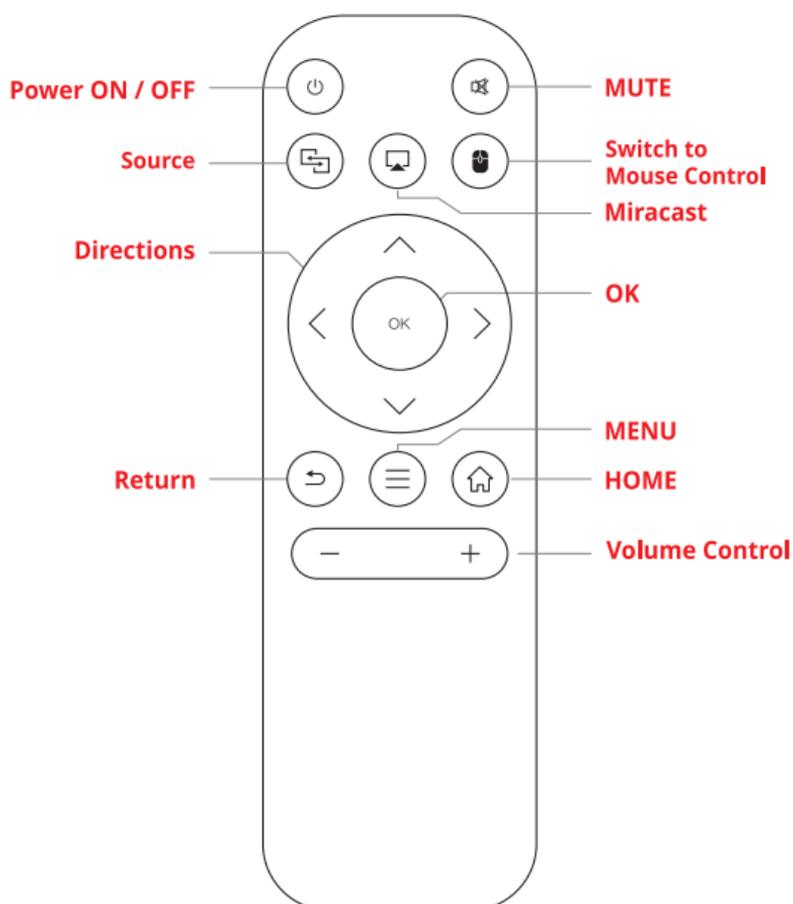

Setting up the Projector:

1. Connect the power cord to the socket of the projector and turn it ON.
2. Before turning ON, make sure to place it in a flat surface for a proper projection then press the power button / turn it on by using the remote.
3. Align the projectors as shown in the image below to ensure proper projection.

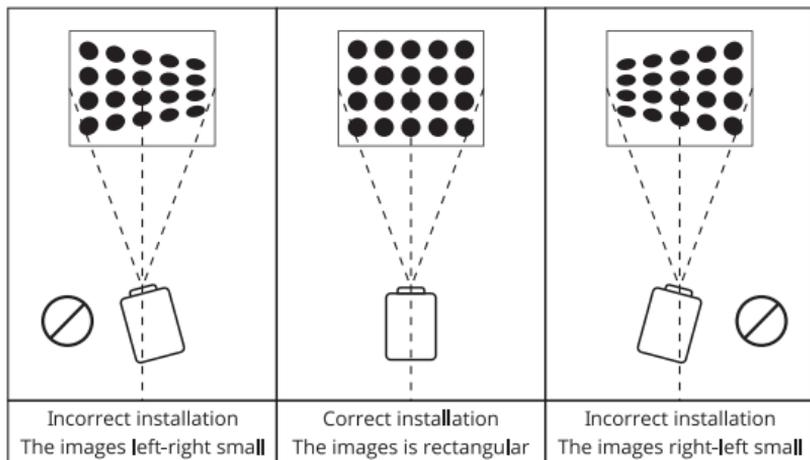

Focus & Keystone Adjustment

Rotate the Focus Knob to adjust the Focus of the Projector.




Note: Auto focus feature is not available, the product features only manual focus.

Keystone Adjustment :

The 4 point keystone can be adjusted in Projection settings.


Android Home:

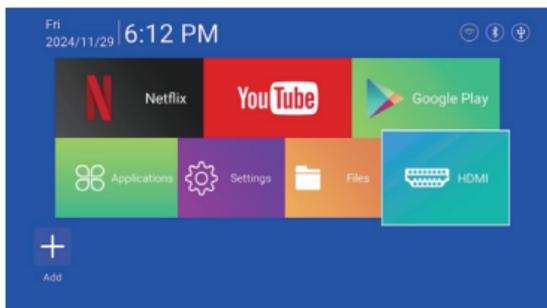

1. Once the projector is turned on you'll be directed to the home screen.
2. The home screen displays list of pre-installed apps, Playstore, Setting menu, File Manager, Input source - HDMI etc.

Settings:

Switch to homepage, open the settings main menu. This menu contains sub menu like Network, Projector, Display, Sound, Upgrade, Bluetooth, General and Info.

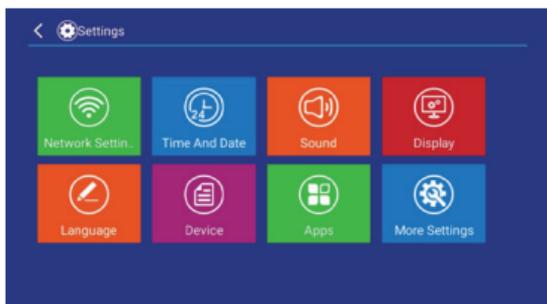

USB Connection :


Plug the USB to the port present at the rearside of the projector. Now navigate to the USB tab present in the homepage.



HDMI Connection :


Once the HDMI is connected to the projector, you will need to select the specific signal source as input. After connecting, the content played on the source will be streamed on the projector.



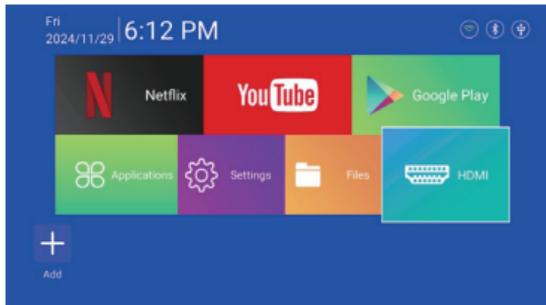


Bluetooth Settings :

1. Go to settings> Bluetooth settings.
2. Turn the Bluetooth Connection On and search for nearby bluetooth devices.
3. Choose the desired bluetooth device to pair and connect.

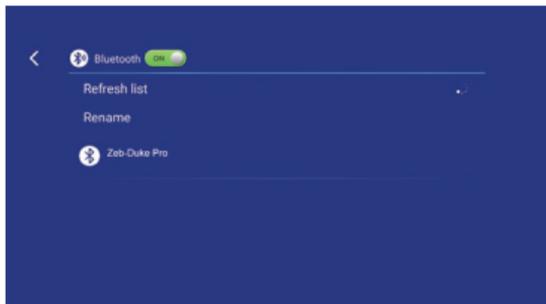




Network Settings :

1. Go to settings> Network settings.
2. WIFI setting, WIFI "ON",
3. select the Desired network and input password to connect to the network

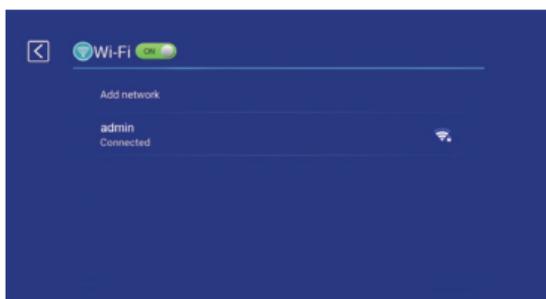

Usage Instructions:

1. The projector consists of a Built-in Rechargeable Battery that allows the projector to run on battery power.
2. Kindly use the Power Adapter provided with the projector to recharge or use the projector on power supply.
3. The Projector has different Battery modes : Energy Saving Mode, Recommended Mode & Performance Mode.

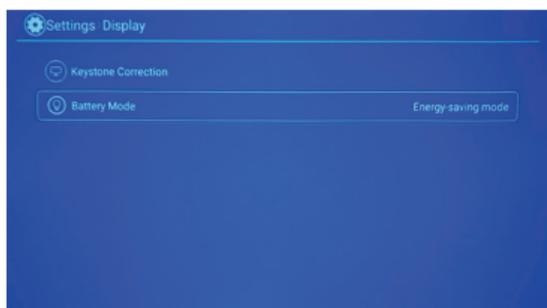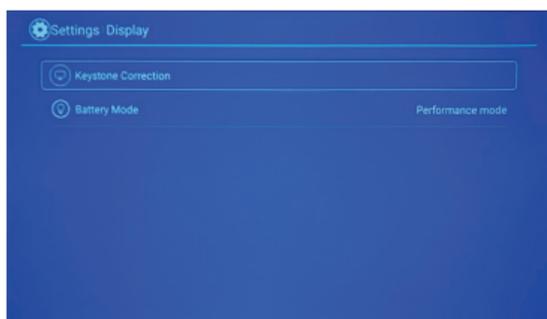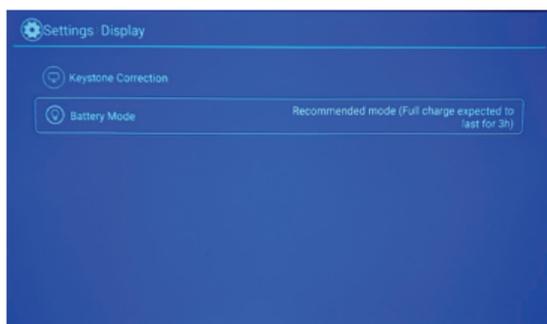

ISO 9001:2015 Certified Company
www.zebronics.com

