

ZEBRONICS

Smart LED Projector

PixaPlay[®] 77G



User Manual

www.zebronics.com

Dear Customer,

Thank you for purchasing the **ZEB-Pixaplay 77G** Smart LED Projector. Please read the user manual carefully before usage & save it for future reference.

Note:

- *To provide a stable power supply, kindly use the cable provided with the product and connect to a (AC 220-240V) power source.*
- *Avoid the self-disassembly of the product as it results in voiding of the product's warranty.*
- *Avoid looking directly at the projector lens while it is active.*
- *Make sure that the projector's air vents are not blocked while in use. The device must be kept in a well ventilated surrounding for proper functioning.*
- *It is recommended to power OFF the projector after a continuous usage of 6 hours maximum.*
- *Place the projector away from water or other liquids. Avoid water accumulation and ensure good ventilation.*
- *In case of enquiry regarding the projector, email us at enquiry@zebronics.com or contact us at 044 4000 0004.*

Features:

- Home Theater Projectors for Movies, TV & Gaming etc..
- Projector With Google TV
- Works with Google Cast
- DRM L1
- Netflix | Youtube | Prime Video | Jio Hotstar
- 4K Support
- FHD 1080p (Native)
- upto 508cm Screen Size
- Auto Focus & Auto Keystone Adaptation
- 30000h Lifelong LED Lamp
- 270° Tilt Mechanism
- Multi connectivity (BT v5.0 | HDMI (ARC) | USB | AUX OUT)
- Built in Speakers
- Dual Band Connectivity (2.4GHz & 5GHz)
- BT Remote with Voice Assistant
- Quad Core Processor
- Fabric Design
- Carry Handle
- Smart Projector
- APP Support
- Lens Shield

Specification:

Model	: ZEB-SLP 6
Screen size	: 116-508cm
Native Resolution	: 1920x1080p
Max. Supported Resolution	: 4K
RAM	: 2 GB
Core Processor	: Quad core Processor
Storage (ROM)	: 8 GB
Android TV OS Version	: 14.0
Wi-Fi Connectivity	: Dual Band Connectivity (2.4GHz & 5GHz)
Bluetooth Version	: v5.0
Lamp Lifespan	: 30000h
Brightness	: 7500 Lumens
Dynamic Contrast Ratio	: 5000:1
Projection Distance	: 1 - 6m
Port Interface	: BT v5.0 HDMI (ARC) USB AUX OUT
Video file format	: H.265, H.264, H.263, VP9, VP8, MPEG1, MPEG2, MPEG4, XVID, VP6, MJPEG
Input Voltage	: AC 100-240V, 50/60Hz
Product Dimension	: 13.8 x 14.3 x 22 cm (W x D x H)
Net. weight	: 1.4kg

Package Contents:




Projector



Remote Control
(Batteries not Included)




Power Cord

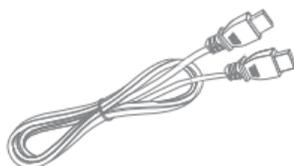

HDMI Cable




QR Code Guide

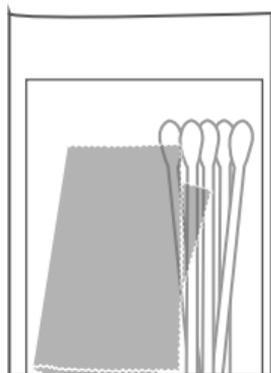

Cleaning Kit

Product Description

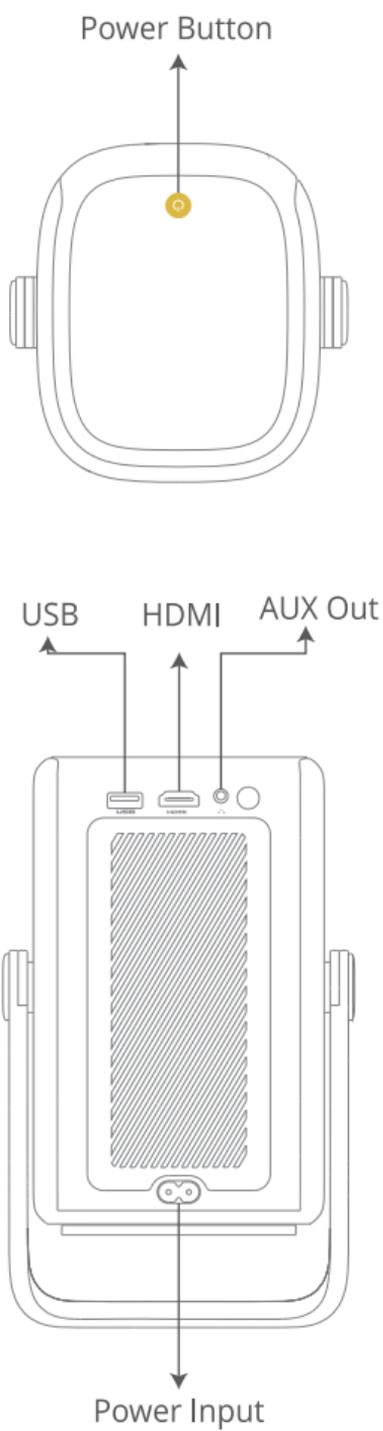


Remote Control




Setting Up the Projector:

1. Plug the Power cord into the projector's AC power input. Insert the other end of the power cord into a standard wall power socket. Ensure the wall socket is turned on to supply power.
2. Please place the projector on a flat surface to ensure proper projection. Now turn the projector On by pressing the power button either on the panel or on the remote.
3. The projector should be aligned straight to the screen / the place of projection.

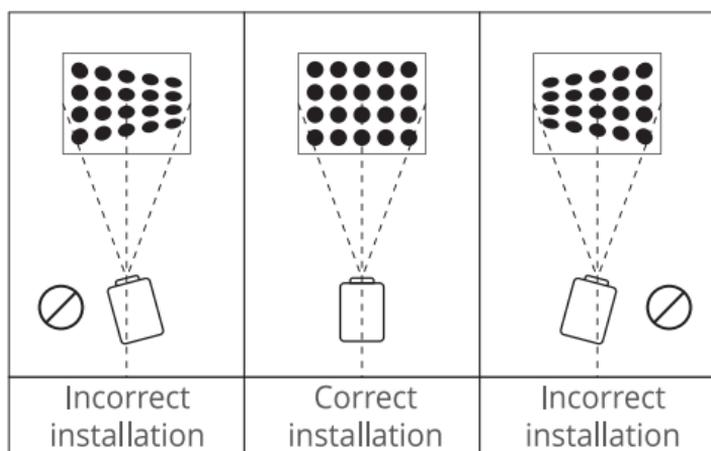

Projector distance & size :

The recommended projection screen size is 116 - 508 cm. For an improved viewing experience, it is recommended to use the projector in a room that provides as much darkness as possible.

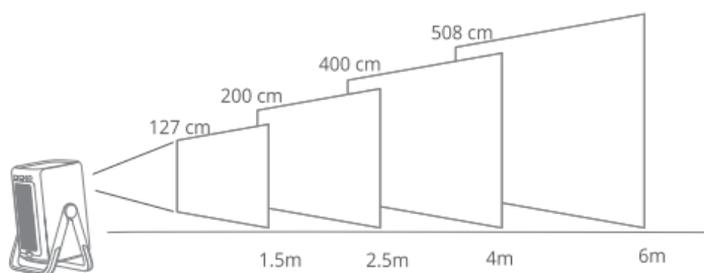

Note: The above mentioned image is for indicative purpose alone while in actual product, the distance to screen size may vary from the values mentioned above.


Focus & Keystone Adjustment:

The Projector has Auto Focus Technology and Auto Keystone Adaptation. The Focus can also be adjusted according to the user using the remote control. Keystone Settings can be accessed in the Display Settings under Menu option.



Setting Up the Remote Control

While setting up the Projector for the first time it is required to pair the Remote Control to the Projector. Hold the Home & Back button on the Remote for 5 seconds to pair with the Projector.

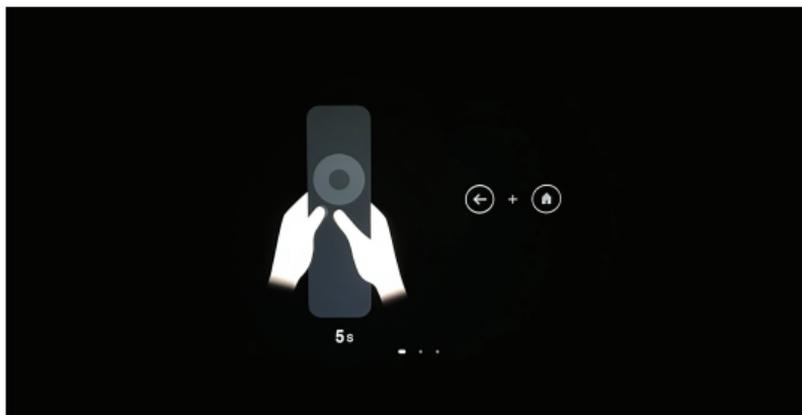

Google Home Screen




1. Once the Projector is set up, the projector will lead you to the home screen.
2. The Home Screen will display Apps, Settings, Screensaver Settings, Play store etc.

Settings




Press the Settings button on the Remote control or navigate to Settings Menu on the Homepage of the projector. This menu contains submenus for Notification, WiFi Settings, Bluetooth Settings, Screensaver & Accessibility menu.

USB Connection

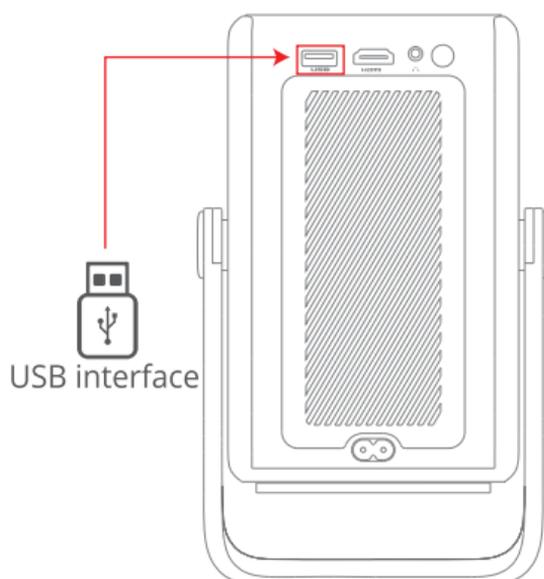


Plug the USB to the port present at the rear side of the projector. Now navigate to the source tab by clicking the Source Button on the remote and select USB sub-menu.


HDMI Connection

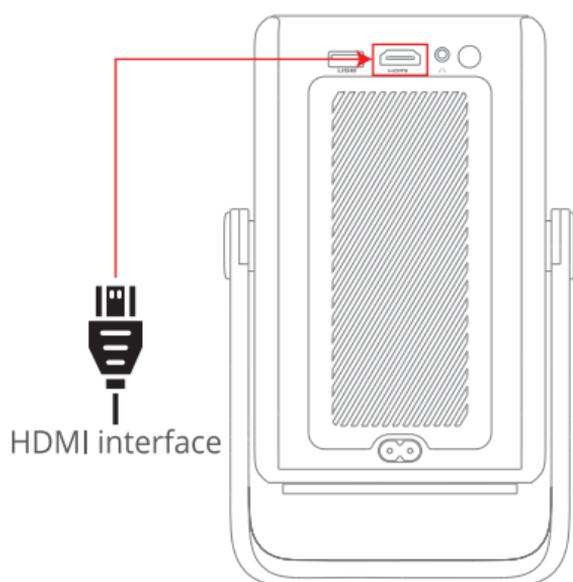

Once the HDMI is connected to the projector, you will need to select the specific signal source as input. After connecting, the content played on the source will be streamed on the projector.


WiFi Settings

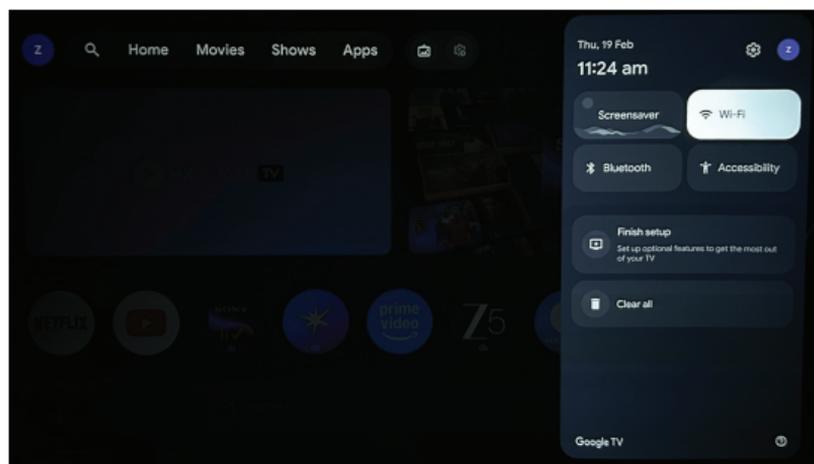

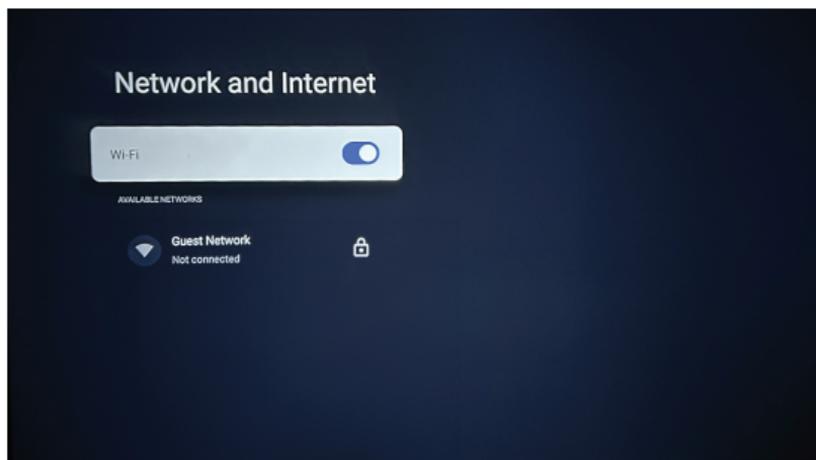

Open the Wifi Settings and turn on the WiFi. Select the desired WiFi and connect through authentication.

Bluetooth Settings

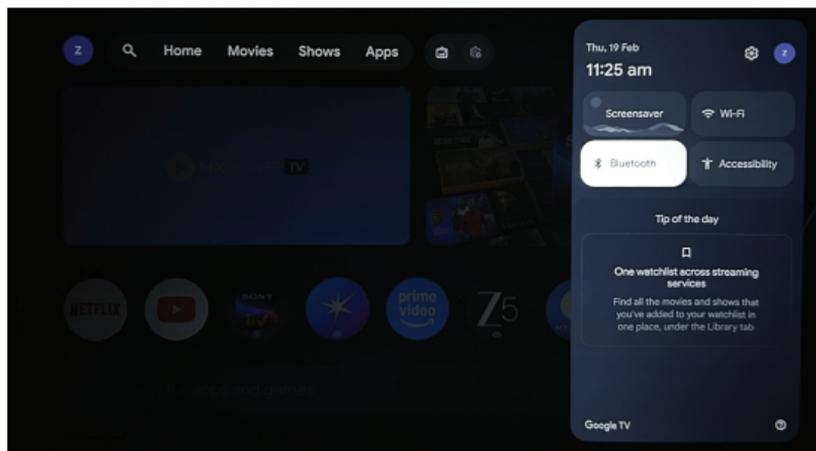

Remotes and accessories

+ Pair remote or accessory

ACCESSORIES



RemoteG10

Battery level: 100%

Set up remote buttons

Control volume, power, input on TVs, receivers and soundbars

Open the Bluetooth Settings and turn on the Bluetooth. Select the desired Device and connect it to the Projector.

ISO 9001:2015 Certified Company
www.zebronics.com