


ZEBRONICS

Metal

ZEB Trolley DJ Speaker
MONSTER PRO 2X12L1

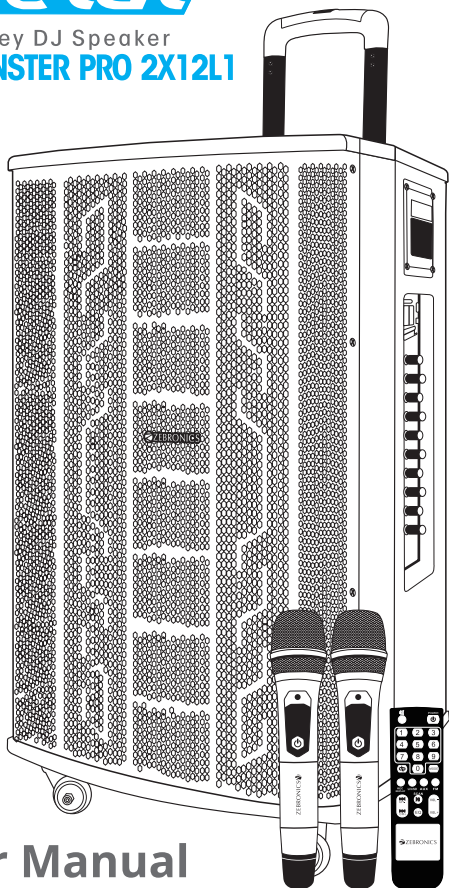

User Manual

www.zebronics.com

Thank you for purchasing Zebronics Speaker. Please read this user manual carefully before operation & save it for future reference.

Note:

- Avoid the use of this speaker at the high temperature and in high humid environment.
- Avoid self-dismantling of speaker. If you do so the warranty will be void.

Features:

- Wireless BT / USB / Micro SD / FM / AUX / Mic Input x 2 / Guitar IN x 2
- Recording function
- LED display
- 30.48cm full range speaker
- 2 way speaker
- Remote control
- Two Wireless mic
- Volume, bass & treble controls
- Karaoke
- With Passive radiators
- supports external battery
- Mic volume, Mic bass & Mic treble controls
- Echo/ Delay /Guitar volume controls
- Built in rechargeable battery
- 4 Castor wheels with retractable handle

Specification:

Output power (RMS) : 120W

Driver size

Full range : 30.48cm

Tweeter : 2.54cm

Impedance

Full range : 4Ω

Tweeter : 6Ω

Frequency response : 60Hz-19kHz

S/N Ratio : ≥80dB

File format support : MP3, WMA, WAV

Line input : RCA to 3.5mm

Max. supported USB/mSD

Memory size : 64GB

FM frequency range : 87.5 MHz-108 MHz

Charging time : 6-8h

Playback time : 3.5h*

BT name : Zebronics Metal

BT version : 4.2

Product dimension : 400 x 390 x 625 mm
(W x D x H)


Net. Weight : 19.75 kg

** at 50% volume*

Package Contents:


Trolley DJ Speaker	: 1 U
Remote	: 1 U
Wireless Mic	: 2 U
QR Code Guide	: 1 U
Input cable	: 1 U
DC cable	: 1 U
Power Cord	: 1 U

Control Description

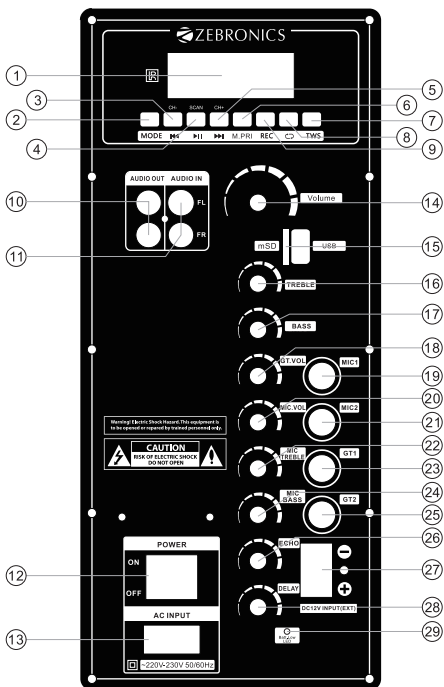

- 1.LED Display
- 2.Mode
- 3.Previous/Channel-
- 4.Play/Pause&FM Scan
- 5.Next/Channel+
- 6.Microphone Priority(Long pressing)
7. TWS
- 8.Repeat button
- 9.Mic Recording
- 10.Audio out
- 11.Audio in
- 12.Power Switch
- 13.AC Input
- 14.Master volume control
- 15.mSD/USB card
- 16.Treble volume control
- 17.Bass volume control
- 18.Guitar volume control
- 19.Microphone input port 1
- 20.Microphone volume control
- 21.Microphone input port 2
- 22.Microphone treble volume control
- 23.Guitar input 1
- 24.Microphone bass volume control
- 25.Guitar input 2
- 26.Echo volume control
- 27.DC 12V input(Ext)
- 28.Delay volume control
- 29.Battery Low indicate light

Remote Control

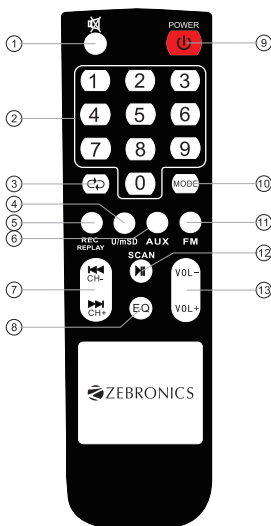

1. Mute control Button
2. 0-9 Number Control button to selecting Mp3 song
3. Repeat control button
4. USB/mSD Control button
5. Mic Recording &Replay Control button
6. Aux Control button
7. Previous (Channel -)&Next (Channel +)
8. EQ control Button
9. Power control button
10. Mode control Button
11. FM Control button
12. Play/Pause & FM Scan
13. Volume-&Volume+

General Instructions

BT connectivity

- Switch the source to BT mode
- Turn on BT on your mobile and scan for nearby BT devices.
- Tap on **“Zebronics Metal”** to connect.

USB/Micro SD Mode

- Insert the USB/Micro SD card into the slot provided on the speaker
- The speaker will automatically detect the USB/Micro SD card and the supported audio content will be played from it.

***Note:** This mode isn't selectable on the speaker or remote control unless a USB/mSD flash card is connected*

FM Radio

- Switch the speaker to FM mode
- Long press the Play/Pause button to scan the available FM channels.
- Once the scanning is done, the first scanned channel will start playing

AUX-In

- The speaker can be connected to an audio source using a RCA to 3.5mm cable.
- Connect one end of the cable to the AUX-In port on the speaker and the other end an audio source.

- The audio from the source can be heard through the speaker.

AUX-Out

- The speaker can be connected to another speaker using a RCA to 3.5mm cable.
- Connect one end of the cable to a speaker and the other end to another speaker.
- The audio can be heard through both the speaker.

Recording Function

- First plug-in a USB/mSD flash card which will act as a storage device into the slot provided on the speaker.
- Press the **REC.** button on the remote to start the recording.
- Press the **REC.** button again to stop the recording.
- Press the **REC.PLAY** button to play the recorded file.

Charging indication:

Charging indication : Red LED Glows

Full Charge indication : Green LED Glows

ISO 9001:2015 Certified Company

www.zebronics.com

