

 ZEBRONICS

Mini Soundbar
ZEB **VITABAR 150**



User Manual

www.zebronics.com

Dear Customer,

Thank you for purchasing “ZEB-VITA BAR 150” Mini Soundbar. Please read this user manual carefully before operation & save it for future reference.

Note:

- *Avoid the use of this product at the high-temperature and high humidity environment.*
- *Avoid self-disassemble of product, or it will result in the failure of warranty.*
- *Please charge the product with power adaptor output rated voltage DC 5V.*
- *To know more about Terms and conditions for warranty policy, please visit*

<https://zebronics.com/pages/warranty-policy>

Features

BT v5.3 | USB | mSD | AUX

FM Radio

Volume / Media Control

Dual Passive Radiators

RGB LED Lights

TWS Function

Type-C Charging

Built-in Rechargeable Battery

Splash proof

** at 50% Volume (LED Off)*


Specification

Output Power (RMS)	: 20W (10W +10W)
Driver Size	: 5.2cm x 2
Impedance	: 3Ω x 2
Frequency Response	: 100Hz-20 Khz
S/N Ratio	: ≥75dB
File Format Support	: MP2, MP3, WMA, APE, FLAC.
Line Input	: 3.5mm
Max Supported USB Memory Size	: 32GB
BT Name	: ZEB-VITA BAR 150
BT Version	: v5.3
Charging Time	: 8.5h
Playback Time	: 15h*
Product Dimension	: 42 x 6.8 x 7 cm (W x D x H)
Net. Weight	: 585 g


Package Contents

Speaker	: 1 U
AUX Cable	: 1 U
Charging Cable	: 1 U
QR Code Guide	: 1 U

Button Description:

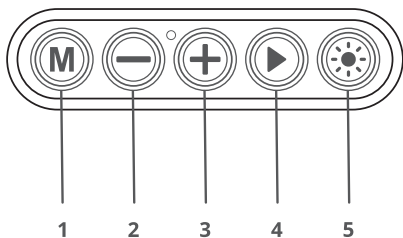

1. Mode button
2. Prev / Volume-Button
3. Next/Volume+ Button
4. Play/Pause, Scan Button
5. LED switching modes button

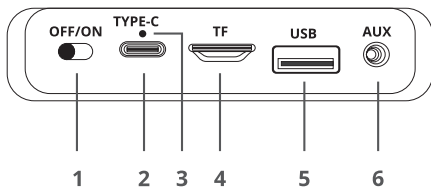

1. ON/OFF button
2. Type C Port
3. LED Indicator
4. mSD Card Solt
5. USB Port
6. AUX Port

1. Single press the mode 'M' button to switch multiple modes like BT/FM/AUX/USB/SD
2. Long press the "+/-" button to change the NEXT/ PREV track or channel when in BT /USB/mSD mode or FM mode respectively
3. Short press the "+/-" button to increase/ decrease the speaker volume
4. Short press "Play/Pause" button to Play/Pause track or channel when in BT /USB/mSD mode or FM mode respectively
5. During Calls, Short press "Play/Pause" button to the Attend /End call.
6. Long press the "Play/Pause" button to Reject the incoming call.
7. Double press the "Play/Pause" the button to redial the last dialed number
8. Long press the "play/pause" button for TWS Function.

Instructions for Use:

Charging the Speaker

1. Connect the Type-C charging cable to the DC 5V 1A charging port of the speaker and insert the other end into a USB power adaptor.
2. Red LED glows indicating that the battery is being charged.
3. The Red LED will turn off once it is fully charged

BT Mode:

Power on the Speaker, it will enter into BT pairing mode, open Bluetooth settings in your phone and search for the BT name "**ZEB VITA BAR 150**" and tap to connect it.

USB/Micro SD Mode:

Connect the USB/MICRO SD card device to the respective ports of **ZEB-VITA BAR 150** and the speaker would automatically start playing from the USB/micro SD card device.

AUX Input:

Connect the speaker to an audio source (Phone, TV, and PC) using 3.5mm AUX Cable. Once Connected, change the speaker to the AUX Mode and thereafter audio can be streamed via the speaker from the connected source.

FM Radio Mode:

Short press "M" button can switch to FM Mode Once the Speaker is in FM mode, Long press the "Play/Pause" button once to Start Scanning for FM Channels. Once Scanning is Complete, long press the "+/-" button to change the channels.

TWS (True Wireless Stereo) function:

When Two Speaker are in Bluetooth Mode, long press "play/pause" button on one Speaker to enter TWS mode, it will search and connect with another speaker automatically, when two speakers connected successfully, you can control two speaker at the same time.

Note:

Buy another Zebronics VITA BAR 150 for true wireless stereo (TWS) setup..

ISO 9001:2015 Certified Company

www.zebronics.com

