



# ZEBRONICS

ALWAYS AHEAD

Since 1997

## Wireless BT Keyboard **ZEB-K5000MW**



### User manual

[www.zebronics.com](http://www.zebronics.com)

Thank you for purchasing ZEB-K5000MW Wireless BT Keyboard. Please read this user manual carefully before usage & save it for future reference.

**Note:**

- Avoid self-disassembly of keyboard, kindly approach our service team with reference to the following link for service support: <https://zebronics.com/pages/service-centres>
- Kindly charge the keyboard before usage. The RED LED indicates the charging of Keyboard. Once fully charged, the LED indication turns GREEN. We suggest to use 5VDC adapter for charging.

**Features**

- Wireless BT
- Slim & Compact design
- UV Printed keycaps
- Multiple OS Compatibility
- Battery indicator
- Built-In Rechargeable battery
- Slim & Minimalist design


**Specifications**

Interface	: BT
Total No. of Keys	: 79
Total No. of Hotkeys	: 12 (Integrated)
Keystrokes Life	: 5 Million cycles
Wireless range	: 10 Meter (without obstacles)
Product dimension	: 281 x 124 x 16 mm (W x D x H)
Net. weight	: 382g

**Instructions for use:**

**BT mode connectivity:**

- Switch ON the Keyboard.

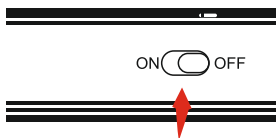

- To enter BT discover mode, press and hold F1 /F2 /F3 button, corresponding to BT1 / BT2 / BT3 modes. You can notice the LED blinks rapidly to indicate the BT discover mode.



- Now open the BT menu in your smart phone / Laptop / smartphone and scan for the name ZEB-K5000MWand pair to it.
- Once connected, the LED blinking will stop.

### 3 BT connection and switching between the connections:


- The keyboard supports up to 3 BT connections, which can be switched as per usage. For instance, you can connect your smart phone, Laptop and other BT supported device on BT1 / BT2 / BT3 respectively.
- Once connected to the devices, you can press the F1 / F2 / F3 button (short press) to switch among the 3 BT connections.
- This helps you to keep the keyboard connected to all 3 devices in the same time and allows you to switch between them as per requirement.

### All key operation:

Key	Single Key Function
	Short press this button to switch to BT 1, long press this key for more than three seconds, BT 1 enters the pairing mode
	Short press this key to switch to BT 2, long press this key for more than three seconds, BT 2 enters the pairing mode
	Short press this key to switch to BT 3, long press this key for more than three seconds to enter the pairing mode.
	Mac : No function Smartphone : Home Screen Windows : Homepage
	Mac : Show desktop IOS : Return to the first letter position during text input Android : Recent Apps Windows : Alt+Tab function
	Mac : No function IOS : Show soft keyboard Android : Widget Selection Windows : Options
	IOS: Exit the program Android: Return to the previous page Windows: Return to the previous page

	Previous
	Play/Pause
	Next
	Mute
	Volume -
	Volume +
	Tab & Print Screen / Screen Shot (Press fn & tab to take a screen shot)
	UP
	DOWN
	TO LEFT
	TO RIGHT

## LED Indication:

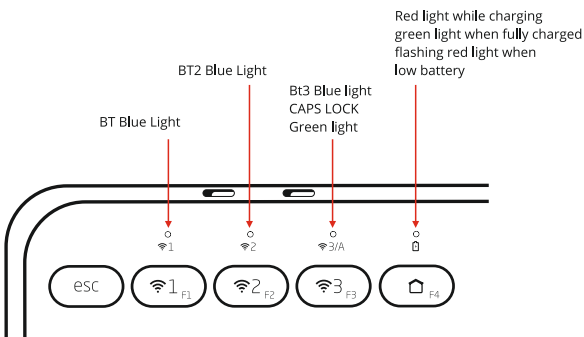

## **LED Indication:**

Blinking RED : Low Battery

Glowing Red : Charging

Glowing Blue : Connected

Rapidly Blinking Blue : Pairing Mode

Green indication on

"A/BT3" : Caps lock ON

Green Indication on

Battery icon : Charging complete

(Caps Lock - Green LED will turn OFF if not using the keyboard for 10 Min)

**ISO 9001:2015 Certified Company**  
**[www.zebronics.com](http://www.zebronics.com)**

