




ZEBRONICS

ALWAYS AHEAD

Since 1997

Wireless BT Keyboard

ZEB **K5001MW**

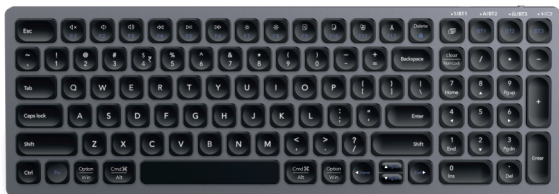

User manual

www.zebronics.com

Thank you for purchasing ZEB-K5001MW Wireless BT Keyboard. Please read this user manual carefully before usage & save it for future reference.

Note:

- Avoid self-disassembly of keyboard, kindly approach our service team with reference to the following link for service support: <https://zebronics.com/pages/service-centres>
- Kindly charge the keyboard before usage. The RED LED indicates the charging of Keyboard. Once fully charged, the LED indication turns GREEN. We suggest to use 5V DC adapter for charging.

Features

Wireless BT

Slim & Full size minimalist design

UV Printed keycaps

Multiple OS Compatibility

Battery indicator

Built-In Rechargeable battery

Specifications

Interface	: Wireless BT
Total No. of Keys	: 99
Total No. of Hotkeys	: 13 (Integrated)
Keystrokes life	: 5 Million cycles
Wireless range	: 10 meter (without obstacles)
Product dimension	: 36 x 12.4 x 1.5cm (W x D x H)
Net. Weight	: 432g

Package contents

Keyboard	: 1 U
Type C Cable	: 1 U
QR Code guide	: 1 U

Instruction to use:

BT Mode Connectivity:

- Toggle the ON/OFF switch as shown in the below image.



- To enter BT discover mode, press and hold Fn + BT1 / Fn + BT2/ Fn + BT3 Button, corresponding to BT1 / BT2/ BT3 modes. You can notice the LED Blinks rapidly to indicate the BT Discover mode.
























- Now open the BT menu in your PC / Laptop / Smartphone and scan for the device name ZEB-K5001MW and pair it. Once connected, the LED blinking will stop.

3 BT Connection and switching between the connections:

- The keyboard supports up to 3 BT connections, which can be switched as per usage. For instance, you can connect your smart phone, Laptop and other BT supported device on BT1 / BT2/ BT3 respectively.
- Once connected to the devices, you can press the FN+BT1 / FN+BT2 / FN+BT3 button (short press) to switch among the 3 BT connections.
- This helps you to keep the keyboard connected to all 3 devices in the same time and allows you to switch between them as per requirement.

All Key Functions:

Button	Combination Key Function	One Button Function
	F1	Mute
	F2	Volume down
	F3	Volume Up
	F4	Previous track
	F5	Play / Pause
	F6	Next track
	F7	Brightness -

	F8	Brightness +
	F9	Select All
	F10	Copy
	F11	Paste
	F12	Cut
	Fn Lock / Un-Lock	Delete
	Pg UP	UP
	Pg Dn	Down
	Home	To the left end
	End	To the right end
	BT1 Pairing, press & hold Fn+BT1 at the same time to enter into pairing mode	
	BT2 Pairing, press & hold Fn+BT2 at the same time to enter into pairing mode	
	BT3 Pairing, press & hold Fn+BT3 at the same time to enter into pairing mode	
	Screen capture key	

LED Indicators:

○ 1/BT1 ← Num Lock / BT1

○ A/BT2 ← Cap Lock / BT2

○ /BT3 ← Fn Lock / BT3

○  ← Charging indication /
Battery Low

ISO 9001:2015 Certified Company
www.zebronics.com

