AIO Cooler

# ZEB-AIO360V1B/W

Gamer's Dream




## User Manual

www.zebronics.com

Thank you for purchasing **ZEB-AIO360V1B/W** AIO Cooler. Please read this user manual carefully and keep it for future reference.

***Note***

*• Avoid the usage of this product at the high temperature and high humidity environment.*

*• Avoid the self-disassembly of the products or it results in the voiding the product's Warranty.*

*• Please wipe the existing thermal compound which is present on the CPU and install the Included thermal compound for obtaining the best Cooling efficiency.*

*To know more about Terms and conditions for warranty policy, please visit*
*https://zebronics.com/pages/warranty-policy*

**Features**

- 360mm AIO Cooler
- 66.65 CFM Fans
- ARGB Controller
- 3 x 120mm Single Frame ARGB Fan
- ARGB Sync

**Specifications**

| | |
|---|---|
| Form Factor of the AIO Cooler | : 360mm |
| Product Weight | : 1.28 Kg |

**CPU Socket**

Supported CPU Models

| | |
|---|---|
| Intel | : LGA 1366 / 2011 / 2066 / 115X / 1200 / 1700 / 1851 |
| AMD | : AM4/AM5 |

**Fan Specs**

| | |
|---|---|
| No. of Fans | : 3 x 120mm |
| Power Consumption | : 3.84W |
| Noise Level | : 35.7db |
| MTBF | : 30000 Hours |
| Airflow Rate | : 66.65 CFM |
| Speed (Max.) | : 600-1800 RPM |
| RGB/ARGB Sync | : ARGB Support |
| Power Connector | : 4-Pin Connector \| Length : 45cm |
| LED Connector | : 3-Pin Connector \| Length : 50cm |
| Dimensions | : 36 x 12 x 2.5 cm (W xD x H) |

**Pump Specs**

| | |
|---|---|
| Rated Voltage / Current | : 12V / 0.35A |
| Power Consumption | : 4.2W |
| Noise Level | : 30dB |
| MTBF | : 30000 Hours |
| Speed (Max.) | : 1500-2500 RPM |
| Tube Type | : Braided Rubber Tube |
| Tube Length | : 38cm |
| Tube Diameter | : 1.2cm |
| Power Connector | : 4-Pin Power Connector \| Length : 31cm |
| LED Connector | : 3-Pin ARGB Connector \| Length : 46cm |
| Dimensions | : 9 x 9 x 4.5cm (W x D x H) |

**Radiator Specs**


| | |
|---|---|
| Material of the Heat Sink | : Aluminium |
| Material of the Heat Transfer Pipe | : Aluminium |
| Dimensions | : 39.5 x 12 x 3cm (W x D x H) |

## Package Contents


| | |
|---|---|
| AIO Cooler | : 1U |
| AMD Bracket Set | : 1U |
| Intel Backplate | : 1U |
| ARGB Controller | : 1U |
| Screws Sets | : 4U |
| Thermal Paste with Spreader | : 1U |
| QR Code Guide | : 1U |

## Package Contents


A CPU Cooler



B Intel Backplate




C Bracket




*Attached to CPU Block already*


D AMD Bracket




E Thermal paste with spreader




G1 4 x Mounting Nuts




G2 4 x AMD Bracket Screws




G3 4 x Intel Screw Studs



G4 4 x Intel bracket screws (LGA2011)



G5 Radiator Mounting screw set.



**For INTEL SETUP**

**Installation Instructions :**


**1. Applying the Thermal Paste :**

Step1 : Remove the existing Thermal compound which is present on the CPU.


Step 2 : Apply the included thermal paste on the CPU as per your CPU requirement.

Step 3 : Using the include Thermal paste spreader, Spread the applied thermal paste evenly on the surface of the CPU.

Step 4 : Wipe of the excess Thermal compound which is present on the CPU. Now peel of the protective cover which is present under the conductive plate of the CPU Block.

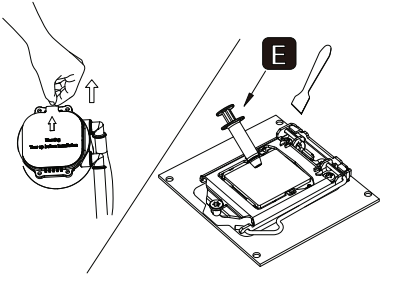

## 2. MOUNTING THE CPU BLOCK
## For LGA 1700 / LGA 1200 /LGA115X Models

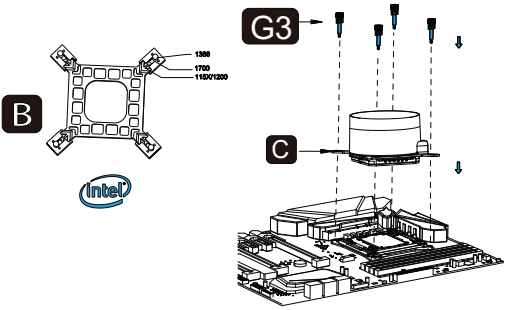


Step 1 : Take the included Intel Mounting Backplate(B), Adjust the mounting points according to your motherboard layout. Now align it to the rear side of the motherboard.


Step 2 : Align the mounting studs(G3) to the motherboard as shown in the reference image. Fasten the Mounting studs to the Mounting bracket which is placed on the rear side of the motherboard.

Step 3 : Align the CPU block to the mounting studs(G3) (as shown in the reference image).

Step 4 : Align the mounting Nuts(G1) to the CPU block (as shown in the reference image).

Step 5 : Using the required tools. Fasten the Mounting nuts(G1) along with the CPU block to the mounting Studs(G3) which is placed on the motherboard.


**For LGA2011 model**

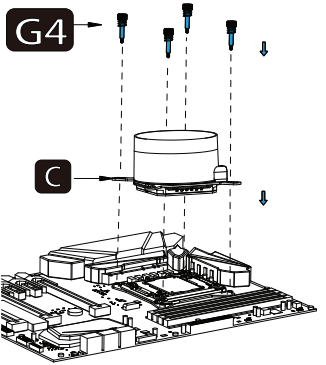


Step1 : Take the included Intel Mounting Backplate(B), adjust the mounting points according to your motherboard layout. Now align it to the rear side of the motherboard.
Step2 : Align the CPU block to the motherboard (as shown in the reference image).
Step3 : Align the mounting Screws(G4) to the CPU block (as shown in the reference image).


Step 4 ： Using the required tools. Fasten the Mounting screws(G4) along with the CPU block to the mounting bracket(B) which is placed on the rear side of the motherboard.

**3. Connection of AIO Cooler**

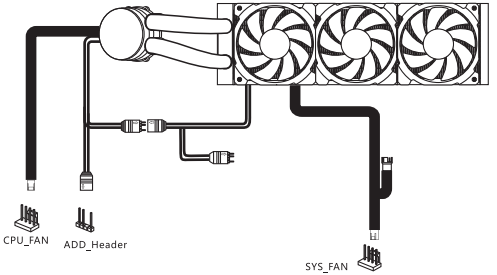


Step 1 ：Plug the 4 - pin Fan connector to the System fan header of the motherboard.
Step 2 ：Combine the 3 - pin ARGB fan connector and 3 - pin ARGB CPU Block connector. Now plug the Combined ARGB connector to the 3 - pin connector to the ARGB header of the Motherboard.
Step 3 ：Connect the Power connector CPU Block connector to the CPU Fan Header which is present on the motherboard.

## 4. Mounting the AIO Cooler setup

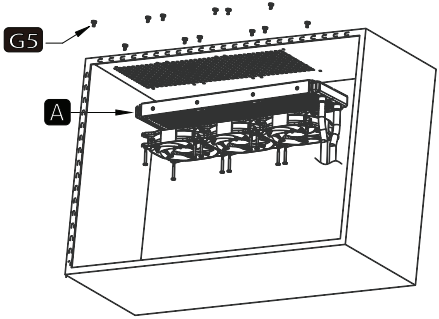



Step1 : Align the Radiator block of the AIO cooler to the mounting points of the Gaming cabinet.
Step2 : Place the mounting screws on the mounting points of the AIO cooler.
Step3 : By using the required tools, Fasten the mounting screws to the AIO cooler via the cabinet. Ensure to apply pressure evenly for optimal placement.

***Note:*** *The Image is for mounting reference only*

**For AMD SETUP**

**1. Combining the CPU Mounting Brackets**

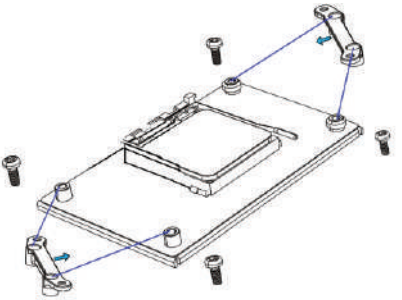


Step1 : Align the AMD mounting brackets (D) To the CPU mounting points of the motherboards.

Step 2 : Align the AMD mounting screws (G2). To the mounting points of the motherboard.

Step 3 : Using the required tools, Fasten the AMD mounting screws into the mounting points of the motherboard via the AMD mounting plate (as shown in the Reference image).


**2. Applying the Thermal Paste**



Step1 : Remove the existing Thermal compound which is present on the CPU
Step2 : Apply the included thermal paste on the CPU as per your CPU requirement.
Step3 : Using the include Thermal paste spreader, Spread the applied thermal paste evenly on the surface of the CPU.
Step4 : Wipe of the excess Thermal compound which is present on the CPU. Now peel of the protective cover which is present under the conductive plate of the CPU Block.

**3. Mounting CPU Block**

Step1 : Align the intel screw stud to the mounting points of the AMD Mounting Bracket and fasten the mounting stud to the mounting points of the AMD bracket.
Step2 : Align the CPU block to the Intel screw studs. Now place the CPU block on the CPU via the mounting studs.
Step3 : Now align the Intel mounting Nuts to the Intel screw Stud and Fasten them with even pressure until the CPU block is intact

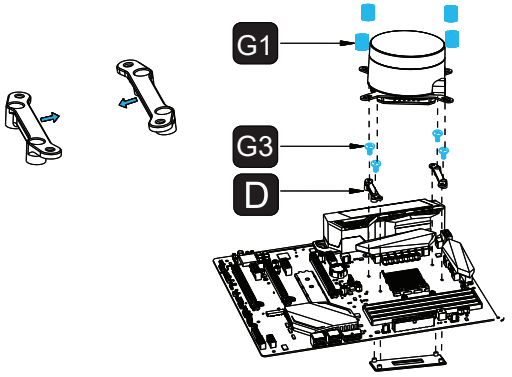



**4. Connection of AIO Cooler**


Step 1 : Plug the 4 - pin Fan connector to the System fan header of the motherboard.

Step 2 : Combine the 3 - pin ARGB fan connector and 3 - pin ARGB CPU Block connector. Now plug the Combined ARGB connector to the 3 - pin connector to the ARGB header of the Motherboard.

Step 3 : Connect the Power connector CPU Block connector to the CPU Fan Header which is present on the motherboard.

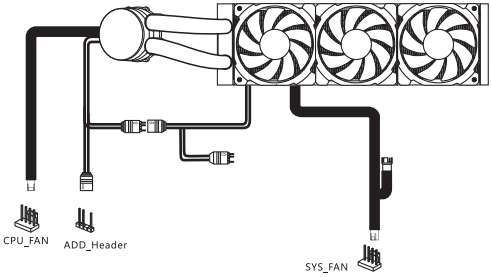
CPU_FAN
ADD_Header
SYS_FAN

**5. Mounting the AIO Cooler setup.**

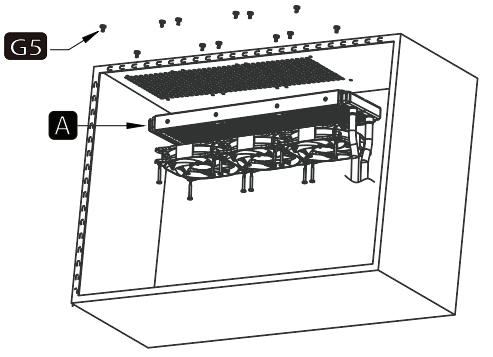


Step1 : Align the Radiator block of the AIO cooler to the mounting points of the Gaming cabinet.
Step2 : Place the mounting screws on the mounting points of the AIO cooler.
Step3 : By using the required tools, Fasten the mounting screws to the AIO cooler via the cabinet. Ensure to apply pressure evenly for optimal placement.

**Note :** *The Image is for mounting reference only Please use a compatible gaming cabinet to mount the AIO cooler.*

We suggest you to visit our Below link to buy the optimal Gaming chassis for your AIO Cooler.

***https://zebronics.com/collections/premium-gaming-chassis***



ISO 9001:2015 Certified Company
www.zebronics.com