



Gamer's Dream

Premium Gaming Wireless Mouse

ZEB **VIPER 100W**



User Manual

www.zebronics.com

Thank you for choosing **Viper 100W** Premium Gaming Wireless Mouse. Please read the user manual carefully before operation and save this user manual for further reference.

Note :

- Please charge the product with power adapter output rated voltages DC 5V.
- Avoid self-disassembly of the Mouse, kindly approach our service team with reference to the following link for service support:

<https://zebronics.com/pages/warranty-policy>

Features:

- Upto 8000 DPI
- Tri Mode (2.4G + BT + Wired)
- 1000 Hz Polling Rate
- Hmano Switch
- Built-in Rechargeable Battery
- Advanced Windows Software
- Power Saving Mode
- 6 Level DPI Switch
- Mode & Power Switch
- 6 Buttons
- Nano Receiver
- Gaming Grade Sensor
- Comfortable & Lightweight

Specifications:

Connectivity : 2.4G + BT + Wired

Resolution : 800 | 1600 | 2400 |

	3200 4000 8000 DPI (default 1600 DPI)
Polling Rate	: 125 250 500 1000 Hz
No. of Buttons	: 6
Cable Length	: 1.5m
Charging time	: 3 h
Button life	: 5 Million
Wireless Range	: 10 m (without obstacles)
Product Dimension (W x D x H)	: 6.1 x 11.6 x 3.8 cm
Nano receiver dimension (W x D x H)	: 1.4 x 0.6 x 1.8 cm
Dongle weight	: 2g
Net Weight	: 70g

Package Contents:


Mouse	: 1 U
Nano Receiver	: 1 U
Charging Cable	: 1 U
QR Code Guide	: 1 U

Product Description:

Front:



Back:

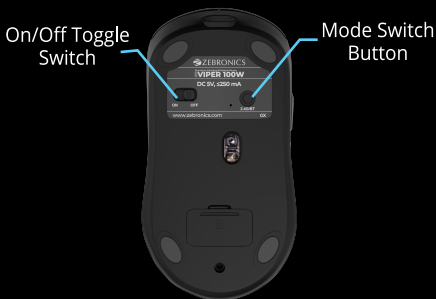

Connectivity Procedure :

2.4 GHz Wireless mode :

Step 1: Plug the Nano receiver into the PC.

Step 2: On the rear of the mouse, press the mode switch to enter into the 2.4 GHz mode.

Step 3: The Red LED light emits for a few seconds and it turns off once it has been paired with the device.

BT mode :

Step 1: On the rear side of the mouse, press the mode button to enter BT mode. Now press and hold the mode button for 3 secs to enter BT discovery.

Step 2: Open the BT menu on your BT device and search for the BT name "Zebtronics".

Step 3: The Blue LED light emits for a few seconds and it turns off once it has been paired with the device.

Wired mode :

The mouse immediately switches to wired mode and turns off all wireless connections (2.4GHz and Bluetooth) when it is connected via a USB to Type-C Cable. When the wired mode is engaged, a red light glows on the rear side.

Charging:


Connect the mouse using the provided Type-C charging Cable with a DC 5V Adaptor.


VIPER 100W Software Installation:

Download and install the VIPER 100W software from the link below to unlock the full suite of settings and features for your mouse.


https://zebronics.info/driverszebronics7991/Mouse/ZEB-Viper_100W/ZEB-VIPER_100W.zip

Now open the software and you can notice the software interface as shown.

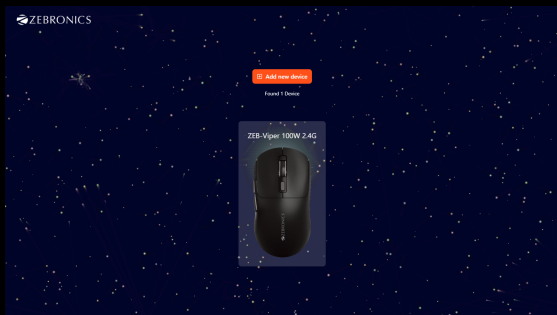

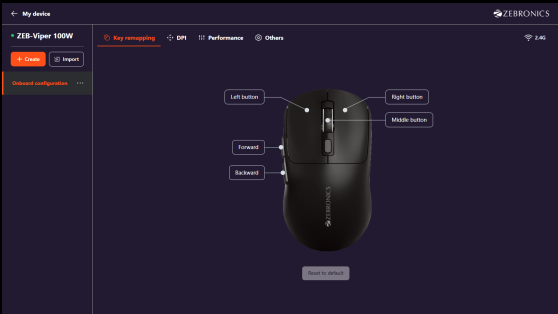


Any key can have new actions assigned to it, and key functionalities can be customized. Make sure to save your configurations after you're finished. Next, make profiles and give them names. Each has a unique collection of essential features that simple whenever your activity or workflow changes. There are many options in many categories, such as System, Keyboard, and Instruction, and you can select different functional activities for your convenience in each area.

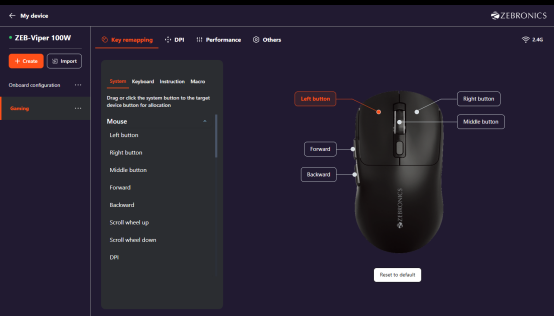

Profile Management :

Any key (with the exception of left click) can have additional actions assigned to it, and key functionalities can be customized. Make sure to save your configurations after you're finished. Next, make profiles and give them names. Each is designed with a unique set of essential features that make transitioning between them simple whenever your activity or workflow changes.

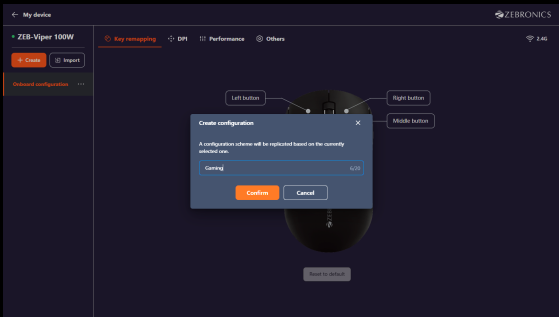



Key Remapping :

Use the Windows application to remap any key configure function or secondary functions perfectly optimized for gaming, productivity, or both.


Mouse Configuration :

The DPI Level, DPI Speed, Polling Rate, and Mouse Sleep Timing can all be changed. When you're finished configuring, your changes will be automatically saved.


Next, create and name a maximum of four profiles, each with a unique collection of essential features that will make moving between them simple whenever your activity or workflow changes.

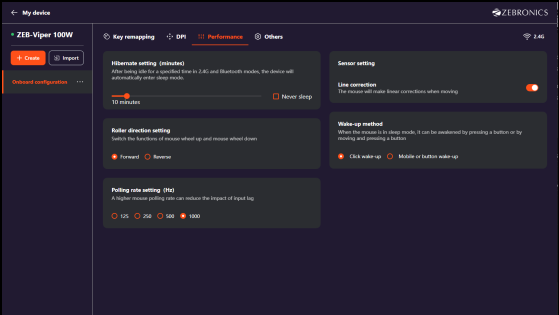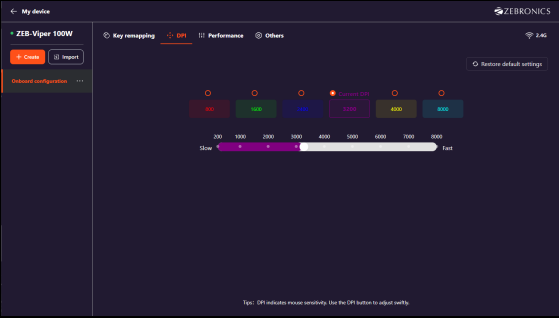


1. Using the Macro Function Click the New button to start Create Macro.

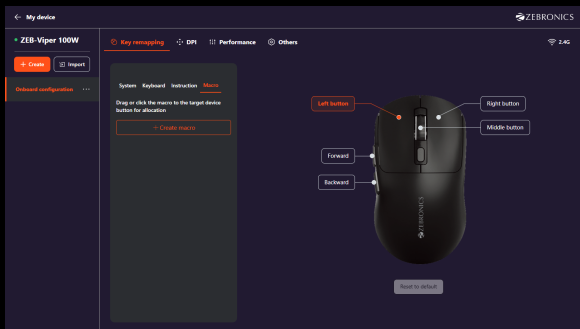


2. Name the Macro according to your usage once you name the Macro and press enter once you've pressed the Enter this screen pops up:

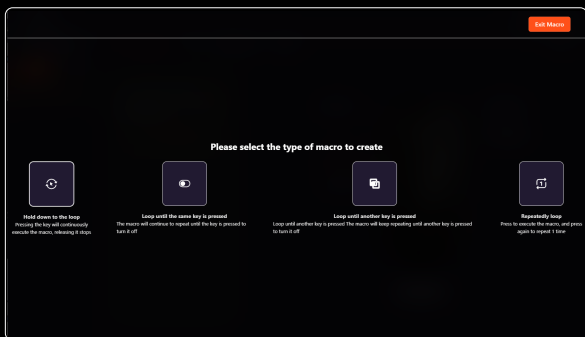


3. Here you can choose the Macro Recording according to your use case and choose the best which fits you. Once you choose the option you can even reconfigure it on the top bar once again and you can even set the delay once you complete every setting then click on the recording button.

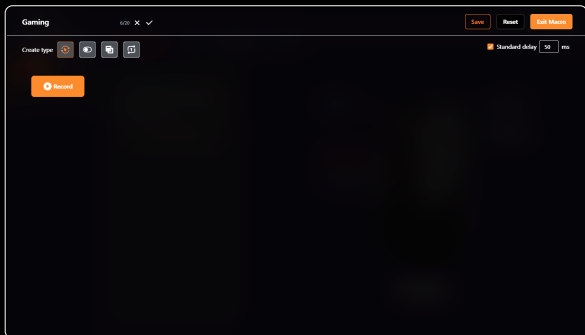

4. Once you have typed the keys click the save button and exit the macro option.

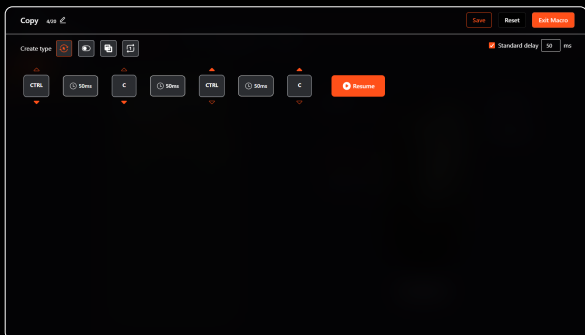


5. Then you can see the Saved Macro function on the Software and you can assign it to any of the Mouse buttons (except Left button).

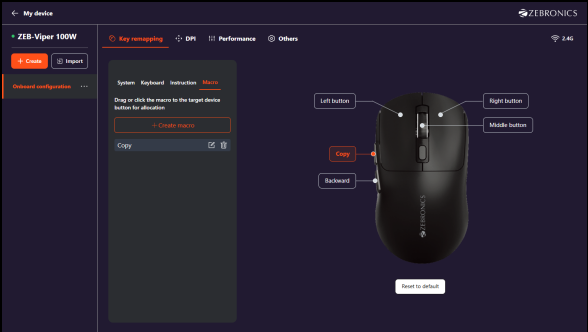

properly recorded, assigned, and ready to use whenever you switch profiles.

Reset :

If you want to factory reset the options & functionalities on the software and start it from scratch you can click the restore button to set every function to default and erase the Macros functions & Profile Configurations.

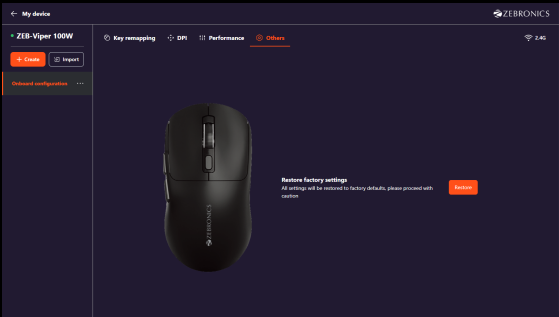

ISO 9001:2015 Certified Company
www.zebronic.com