



Power Bank
ZEB **EnergiSafe** 10R5



User Manual

www.zebronics.com



Thank you for purchasing **ZEB-EnergiSafe 10R5** power bank. Please read this user manual carefully before operation and save it for future reference.

Note:

- Avoid the usage of this product at high-temperature and high-humidity environments.
- Avoid the self-disassembling of the product or it will result in voiding the Product's warranty.
- Please charge the product with a power adapter output rated (DC 5V/3A, 9V/2A, 12V/1.5A) for Type-C Input port.

Caution: There is a risk of explosion if the product is disposed in the fire

To know more about Terms and conditions for warranty policy, please visit

<https://zebronics.com/pages/warranty-policy>

Features:

- 22.5W Max. Output
- Rapid Charge
- LED Indicator
- Mobile/Tablet Compatible
- Type C Port Input & Output
- Over Charge Protection

- Overload Protection
- Short Circuit Protection
- MagSecure compatible
- Built In stand


Specifications:

Battery Capacity	: 10000mAh
Type-C Input (Port)	: DC 5V/3A, 9V/2A, 12V/1.5A
Output 1 (Type-C Port)	: DC 5V/3A, 9V/2.22A, 12V/1.87A, 5~11V/2A PPS (22.5W Max. Output)
Wireless Charging Output	: DC 5V/1A, DC 7.5V/1A, DC 9V/1.12A, DC 9V/1.67A, DC 12V/1.25A (15W max.)
No.of Output port	: 1 Type C port + Wireless Charging
Charging Time	: 3 hours, 05 minutes approx
Product Dimension (W x D x H)	: 6.9 x 1.92 x 10.4 cm
Net Weight	: 184 g
Country of Origin	: Made in India

Package Contents :

Power Bank	: 1 U
Charging cable	: 1 U
QR Code Guide	: 1 U
Magnetic Ring	: 1 U

Port Description:

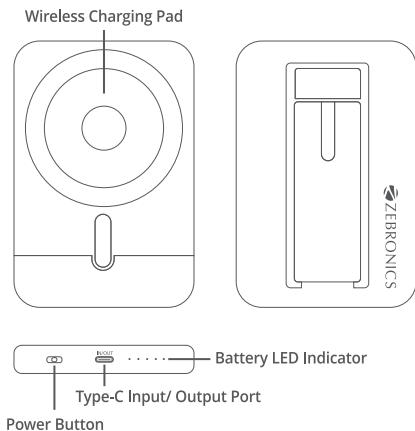


Charging Instructions:

- Plug the Type-C cable into the charging port of the power bank and connect the other end to the power adapter.

Charging your Device with the Power Bank :

- Use a Type-C to Type-C or Type-C to Lightning cable and connect the Type-C end of the cable to the power bank output Type-C port and other end to the device.
- For wireless charging, press the power button of the power bank and place phone that support wireless charging on the Wireless charging pad of the power bank.

Note: Simultaneous usage of the power bank output provides standard 5V DC output.

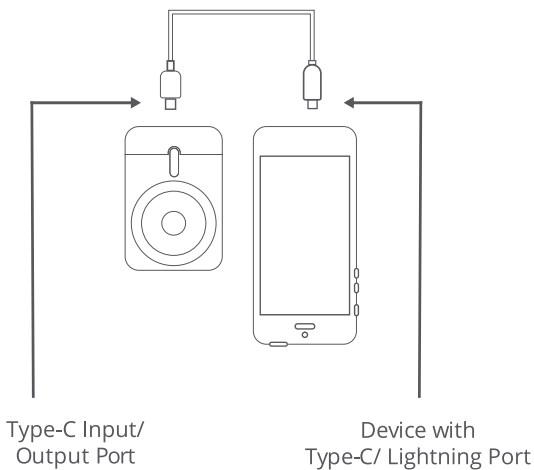

ISO 9001:2015 Certified Company
www.zebronics.com