
ZEBPAD UPGRADE GUIDE

Caution - please make sure to backup your tablet before proceeding further.

Do not connect the Zebpad 7c to the computer until instructed.

Step - 1

Extract the downloaded firmware and upgrad tool file, and copy them to a single folder as shown below.

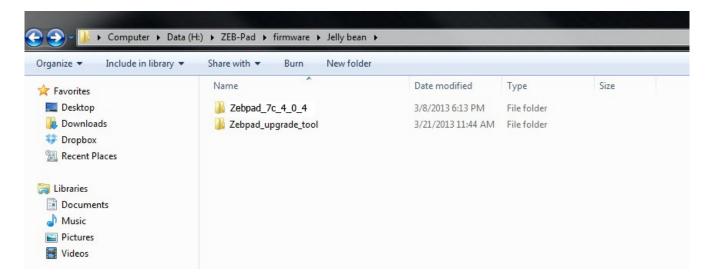

Step - 2


Open the Zebpad_upgrade_tool folder.

Then right click on the "LiveSuit.exe" and then click on "Run as administrator"


⊚ eFex.dll	5/2/2012 11:42 AM	Application extens	44 KB
(%) encode.dll	5/2/2012 11:42 AM	Application extens	32 KB
filelist.txt	10/29/2012 12:42	Text Document	1 KB
⊗ idfactory.dll	10/29/2012 12:42	Application extens	36 KB
⊗ ImgDecode.dll	5/2/2012 11:42 AM	Application extens	44 KB
⊗ KSDecode.dII	5/2/2012 11:42 AM	Application extens	100 KB
LangPlg.dll	5/2/2012 11:42 AM	Application extens	229 KB
LiveSuit.cfg	3/20/2013 6:30 PM	CFG File	1 KB
LiveSuit.cfg.old	10/29/2012 11:29	OLD File	1 KB
LiveSuit dat	10/29/2012 12:42	VCD file	4 KB
EiveSuit.exe	5/2/2012 11:42 AM	Application	1,272 KB
LiveSuit.lan	10/29/2012 12:42	LAN File	8 KB
😵 LiveSuitCN.CHM	10/29/2012 12:42	Compiled HTML	1,896 KB
😵 LiveSuitEN.CHM	10/29/2012 12:42	Compiled HTML	1,896 KB
LiveSuitPack_version_1.07_2011026.exe	5/2/2012 11:42 AM	Application	12,124 KB
😵 LiveSuitTW.CHM	10/29/2012 12:42	Compiled HTML	1,896 KB
Phoenix_Elf.dll	5/2/2012 11:42 AM	Application extens	24 KB
Phoenix_Fes.dll	5/2/2012 11:42 AM	Application extens	36 KB

Step - 3

Once the upgrade tool software runs, below windows will be displayed. Please click on yes.

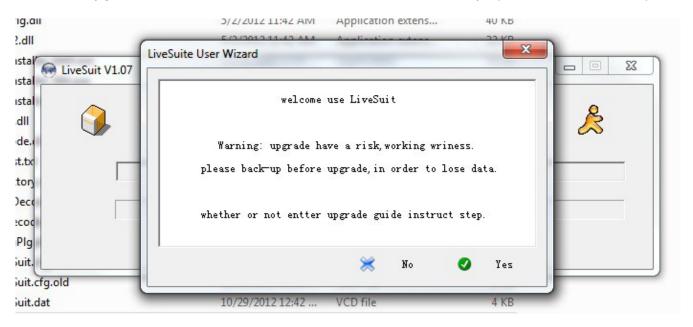


Step - 4
On the next windows please select format.

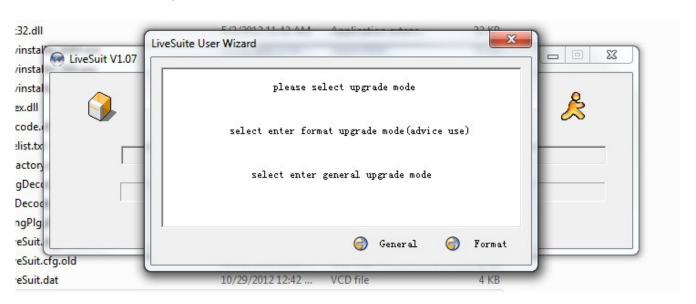

Step - 5


Please switch off Zebpad 7c and do not connect it to the computer yet. Click next on this window.

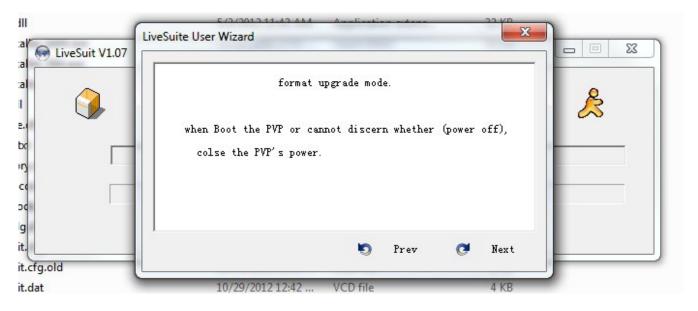

Step - 6


This is very important step. Don't click on finish.

- a. Press the Volume+ button on Zebpad 7c(make sure its switched off)
- b. Connect the micro usb connector on the Zebpad 7c(assuming other end of cable is connected to the computer). Keep the volume+ button pressed.
- c. Then press the power button for 5 times continuously. Keep the volume+ button pressed and USB connected. You computer will detect a new hardware and driver will be installed.
- d. It will automatically go to step 7

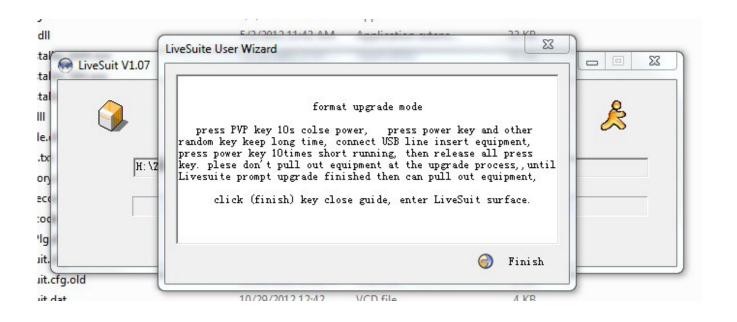

Step - 7


Please click on yes. It will again confirm the same in next windows. Click on yes.

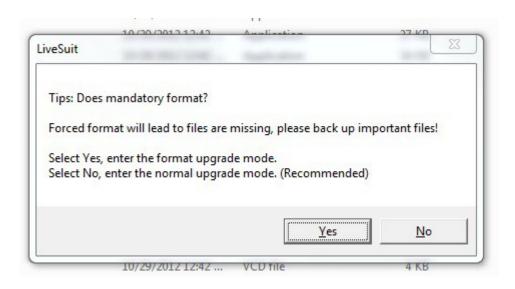

Step - 8


The software will start installing the firmware on Zebpad 7c.

Please make sure while upgrade is going on, USB cable is not disconnected or the computer is not switched off. As it can disrupt the upgrade procedure and you have to bring it to the service center.

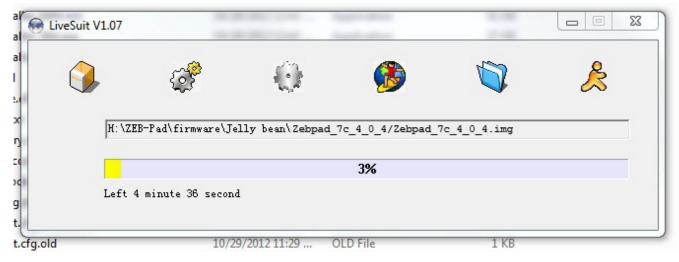

Step - 9

After installation it will give a dialog box, please click on ok. To exit from the software click the button as marked in below image. After installation Zebpad 7c will restart.

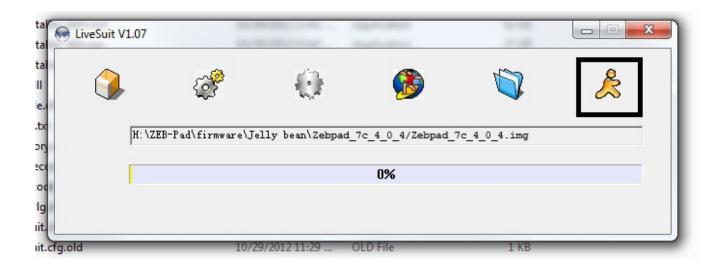

Congratulation, you have successfully installed the firmware. Enjoy Zebpad 7c!!!