dawg

HEADBUG

G60

USER MANUAL

www.dawgflex.com

Yo daWg....

Thank you for purchasing the Headbug G60. Please read the user manual carefully before operation and save this user manual for further reference.

Note:

- Charge the headphone fully before use.
- Avoid the use of this product at the high temperature and high humidity environment.
- Avoid the self-disassembly of the products or it results in voiding the product's warranty.
- Please charge the product with power adapter output rating voltage DC 5V. Avoid using the headphone while charging.

To know more about Terms and conditions for warranty policy , please visit.

https://dawgflex.com/pages/warranty-policy

Caution:

Listening at high volumes can cause hearing impairment. Please limit your usage at high volume.

Features

- Play . Listen . Immerse
- 40mm Neodymium Drivers
- Upto 60h* Backup
- Upto 24h** Backup
- 1000mAh Battery
- Dual Connect - BT | 2.4GHz
- Ultra-Low Latency GameXperience
- FlexMic Communication
- Onboard Audio Controls
- Foldable Design
- Soft Cushions with Breathable Fabric
- Steel-Reinforced Headband for Superior Clamping Force

*@50% volume

**@100% volume

Tech Flex

Model		W-HEADBUG G60
Product Type		Over-Ear
Connectivity		BT/2.4GHz
Compatibility		PC/Playstation(PS4, PS5)/ Smartphones & Tables
BT Version		BT v5.4
Drive Spec	Size	40mm
	Magnet Type	Neodymium
	Speaker Impadence	16Ω
	Frequency Response	20Hz ~ 20KHz
	Sensitivity	115dB
MIC Spec	Microphone Impedence	2.2KΩ
	Microphone Sensitivity	-38dB ± 3dB
	Microphone Polar Pattern	Omnidirectional

Noise Cancellation	ENC
Latency	20ms
Audio	Stereo
Charging Time	1.5 hours
Battery Life	up to 60 hours*
Lighting	Multi-color LED Lights
Receiver Type	USB A
Charging port	Type C
Cable length	1.2 meters
Weight	252g

Inside the box

Headphone x 1

Charging Cable x 1

QR Code Guide x 1

USB Dongle x 1

Button & Port Description:

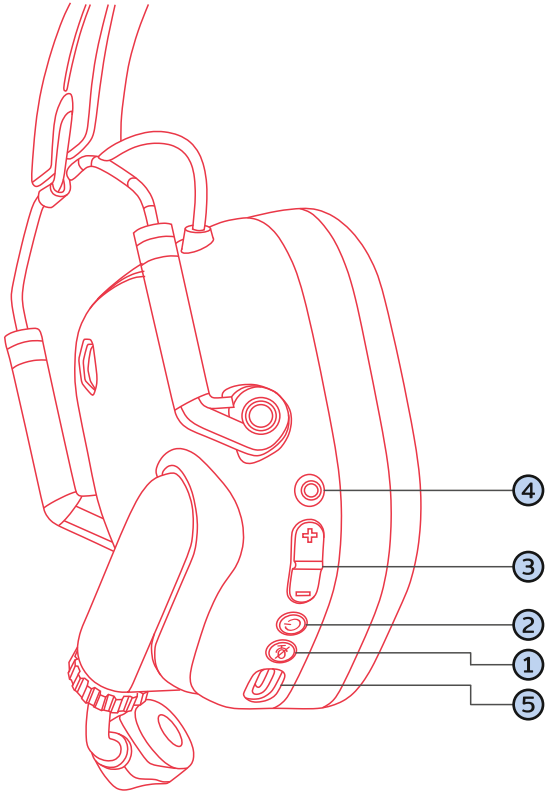

1

• Press the MIC Button once to switch ON and OFF the Mic.The MIC indicator will light up when the MIC is enabled.

2

- Hold the Power Button for 3 sec to Turn On/OFF the device.
- Play/pause – Single Click.
- Answer/Hangup – Single Click
- Reject call – long press.
- Call back – double Click.

3 

- Single press "+" button: IncreaseVolume
- Single press "–" button: Decrease Volume
- Long press "+" button for Next Track
- Long press "–" button for Previous Track

4 

- Press the MFB once to switch between Dongle mode and Bluetooth mode.
- Press the MFB twice to switch between Gaming mode and Music mode.

5 Charging Port

- Before using the Headbug G60 for the first time, please charge it for at least 2 hours.

- When the battery level falls below 10%, you will hear a Low Battery Tones
- The red LED will indicate that the wireless headset is charging. Once fully charged, the LED will turn Blue.
- Please charge the product with power adaptor output rated voltage DC 5V.

Dongle Mode

1 Plug the USB 2.4GHz dongle into the device's port and turn on the headset. Select Headbug G60 the playback device. The LED light will be green and flash while waiting for pairing.

- The paired device will appear as a "Headbug G60".

2 2.4GHz dongle mode LED light:

- Dongle mode: Flashing Green light
- Dongle connected: Breathing Green light
- Dongle Disconnected: Flashing Green light

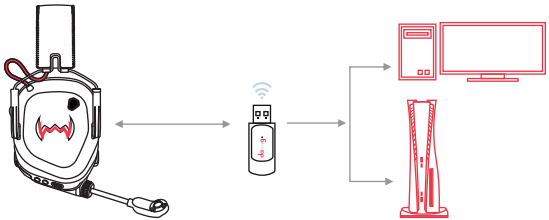

Bluetooth Mode

1 Turn on the headset and enable Bluetooth on your device

• Set the headset to discoverable mode, then search for new devices on your device's Bluetooth settings. When "Headbug G60" appears in the searched device list, click on it to pair.

2 Bluetooth mode LED Light

- Bluetooth Mode: Flashing Blue light
- Bluetooth Connected: Breathing Blue light
- Bluetooth Disconnected: Flashing Blue light

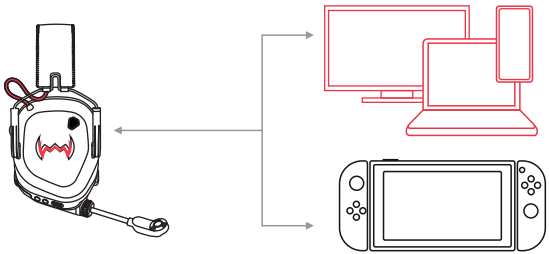

STAY BOLD
STAY BOSS

Let's Flex