

QWERTY 500

HYBRID KEYBOARD



Ba11



User Manual

Designed For Excellence.

www.iball.co.in

Thank you for choosing **iBall QWERTY S500 Hybrid Wireless Keyboard**. Please read the user manual carefully before operation and save this user manual for further reference.

Note :

- *Please charge the product with power adapter output rated voltage of DC 5V.*
- *Avoid self-disassembly of the Keyboard, Kindly approach our service team with reference to the following link for service support :*

Warranty Policy

Features :

- Mech - Membrane Keyboard
(Feels like Mechanical)
- On - Board Smart Status Display
- Compact Full - Size 99 - Key Layout
- 2.4GHz + 2 BT + Wired Modes
- Multi - OS Compatible
- RGB Backlit Modes
- Backlit Brightness & Speed Control
- Built - in Retractable Stand
- 12 Media Keys
- Anti Ghosting Keys
- Type C Charging
- Built - In Rechargeable Battery

Specification :



Connectivity Interface	: 2.4GHz + 2 x BT + Wired Modes
Compatible OS	: Windows MAC Android
No. of Keys	: 99
No. of Multimedia Keys	: 12 (Integrated)
No. of Anti-Ghosting Keys	: 19
Power Consumption	: DC 5V, 1A (Max.)
Keystrokes Life	: 10 Million Cycles
Wireless Range	: 10 meter (Without Obstacles)

Cable Length	: 1.5 meter
Product Dimension	: 40.5 x 13.5 x 4cm (W x D x H)
Net Weight	: 803g

Package Contents :

Keyboard	: 1 U
USB Receiver	: 1 U
Connector Cable	: 1 U
QR Code Guide	: 1 U

Product Description :

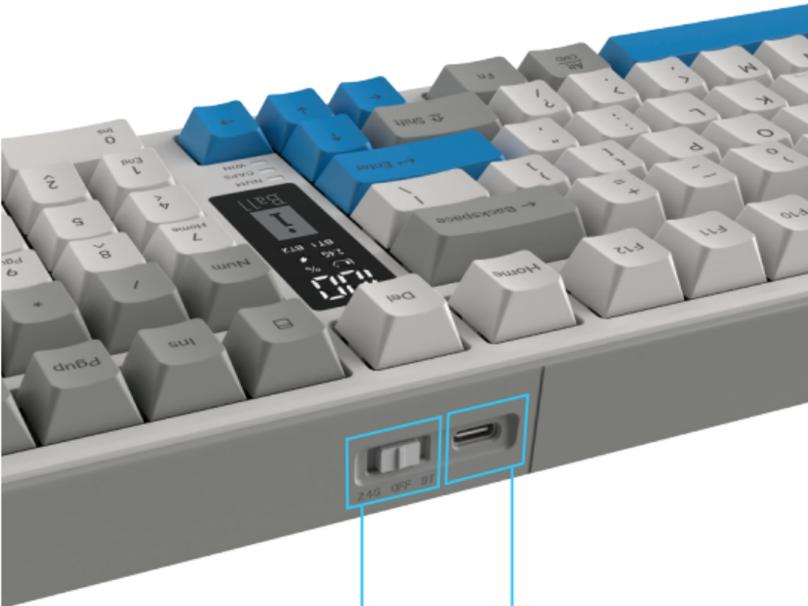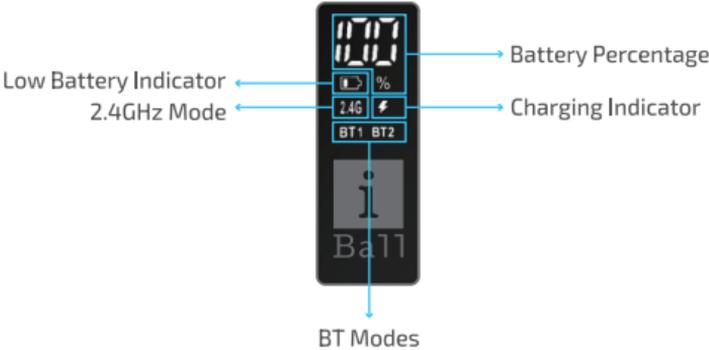

Toggle Switch (2.4GHz | BT | On/Off)

Type-C Charging Port

Instructions for Use

Wired Mode:

Connect the provided Connector Cable from the PC/Laptop to the keyboard.


Wireless Modes:

2.4GHz Mode :

Connect the dongle provided with the keyboard to the PC/Laptop and switch the keyboard to 2.4GHz mode using the Toggle Switch on the Top of the keyboard.

BT Pairing Mode :

- Toggle the switch to **BT Mode**.
- Press and hold **Fn + BT1** or **Fn + BT2** to select the corresponding Bluetooth mode.
- The **LED display** will indicate the selected BT mode.
- The selected BT mode will **blink rapidly**, indicating that the keyboard is in **discovery (pairing) mode**.

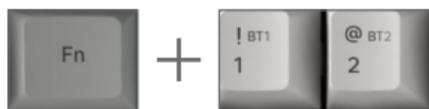

- Open the BT Settings in the PC | Laptop and scan for the keyboard name iBall BT1 & iBall BT2 respectively and pair it. Once Connected, The indicator will stop blinking.


2 BT Connection and Switching between the connections:

- The keyboard supports up to 2 BT connections, which can be switched as per usage. For instance, you can connect your, Laptop or other BT supported device on BT1 / BT2 respectively.
- Once connected to the devices, you can press the FN+BT1 / FN+BT2 button (short press) to switch among the 2 BT connections.
- This helps you to keep the keyboard connected to 2 devices in the same time and allows you to switch between them as per requirement.

Multimedia Functions :

To Switch between Windows & MAC Modes :

Press the respective combination to switch between the two.

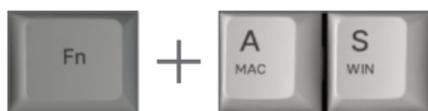

Windows	
Multimedia Key Shortcut	
FN+F1	Open the Player
FN+F2	Volume-
FN+F3	Volume+
FN+F4	Mute

FN+F5	Stop
FN+F6	Previous Song
FN+F7	Play / Pause
FN+F8	Next Song
FN+F9	Mail
FN+F10	Homepage
FN+F11	Lock PC
FN+F12	My Computer
FN+I	PRTSCR
FN+O	SCRLK
FN+P	PAUSE
FN+L	END

MAC

Multimedia Key Shortcut

FN+F1	Decrease Brightness of the LED Light
FN+F2	Increase Brightness of the LED Light
FN+F3	(CMD+ALT+↑) Show / Hide Dock
FN+F4	(CMD+SPACE) Open Launchpad
FN+F5	SIRI
FN+F6	(CMD+SHIFT+4) Screen Shot

FN+F7	Previous Song
FN+F8	Play / Pause
FN+F9	Next Song
FN+F10	Mute
FN+F11	Volume-
FN+F12	Volume+

Function Key Combinations & LED Effects Control :

Function Key Combination	
FN+↑	Increase brightness (5 Brightness Levels). When set to maximum brightness, the indicator flashes 3 times
FN+↓	Decrease brightness. When set to minimum brightness, the indicator flashes 3 times
FN+←	Speed Decrease
FN+→	Speed Increase (5 Speed Levels)
FN+1	Bluetooth 1

FN+2	Bluetooth 2
FN+A	Switching Mac Systems
FN+S	Switching Windows Systems
FN+\	Switching the color of the light effect
FN+Enter	Switching 15 RGB light effects
FN+ESC	Reset to factory Default (The indicator light will flash 3 times)
FN+Backspace	Turn the lights Off/ On
FN+ESC	Lock or unlock the Left Win key or App key (only in Windows mode)



ISO 9001:2015 Certified Company
Since 2001 | www.iball.co.in