



Smart LED Projector

PixaPlay[®] 28



User Manual

www.zebronics.com

Dear Customer,

Thank you for purchasing the **ZEB-Pixaplay 28 LED Projector**. Please read the user manual carefully before usage & save it for future reference.

Note:

- *To provide a stable power supply, kindly use the cable provided with the product and connect to a AC 100-240V, 50/60Hz power source.*
- *Avoid the self-disassembly of the product as it results in voiding the product's warranty.*
- *Avoid looking directly at the projector lens while it is active.*
- *Make sure that the projector's air vents are not blocked while in use. The device must be kept in a well ventilated surrounding for proper functioning.*
- *It is recommended to power OFF the projector after a continuous usage of 6 hours maximum.*
- *Place the projector away from water or other liquids. Avoid water accumulation and ensure good ventilation.*
- *In case of enquiry regarding the projector, email us at enquiry@zebronics.com or contact us at 044 4000 0004.*

Features :

- Multi Connectivity (BT v5.0 | HDMI (ARC) x 1 | HDMI IN x 1 | USB x 2 | AUX OUT)
- Home Theater Projectors for Movies, TV & Gaming etc.
- Powerful Speaker
- Wide Compatibility
- Ceiling Mountable
- Remote Control (BT + IR)
- Electronics Focus (via remote)
- Auto Focus Technology
- Quad Core Processor
- Auto Keystone Adaptation
- Miracast
- Dual band Connectivity (2.4GHz & 5GHz)
- FHD 1080p (Native)
- 30,000h lifelong LED lamp
- Smart Projector
- Netflix | Amazon Prime Video | YouTube

Specification:


Screen size	: 114 - 508cm
Native Resolution	: 1920 x 1080 FHD
Max. Supported Resolution	: 1080p (max)
RAM	: 1 GB
Core Processor	: Quad Core Processor
Storage (ROM)	: 8 GB
Wi-Fi Connectivity	: Dual band Connectivity (2.4GHz & 5GHz)

Bluetooth Version	: v5.0
Display Technology	: LED
Lifespan	: 30,000h
Brightness	: 18000 lumens
Contrast ratio	: 1000:1
Projection Distance	: 1.3m - 5.3 m
Port Interface	: AUX OUT, USB x 2, HDMI (ARC) x 1, HDMI IN x 1
Video file format	: MP4, M4V, MPEG2, MPEG2, MKV, AVI, FLV, MOV
Input Voltage	: AC 100-240V, 50/60Hz
Product Dimension (W x D x H)	: 33 x 24 x 11 cm
Net. weight	: 2.8Kg

Package Contents:

Projector	: 1 U
Remote Control	: 1 U
Power Cord	: 1 U
Cotton Swab Pack	: 1 U
HDMI Cable	: 1 U
QR Code Guide	: 1 U

Product Description

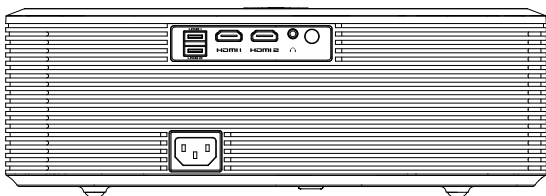


Remote Control



NOTE :

1. To avoid power shortage, do not mix and use the old and new batteries.
2. To avoid battery leakage corrosion, if the remote controller is not used for a long time, please take the battery out.

Projector Interface

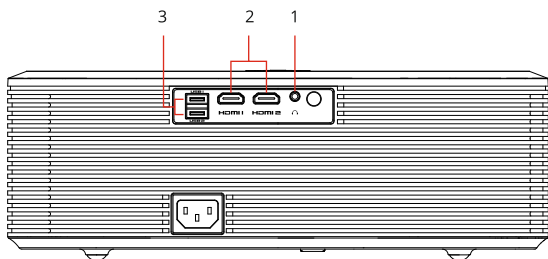

1



2




3




Setting Up the Projector

1. Connect the power cord to the socket of the projector and turn it ON.
2. Before turning ON, make sure to place it in a flat surface for a proper projection then press the power button / turn it on by using the remote.
3. Align the projector as shown in the image below to ensure proper projection.

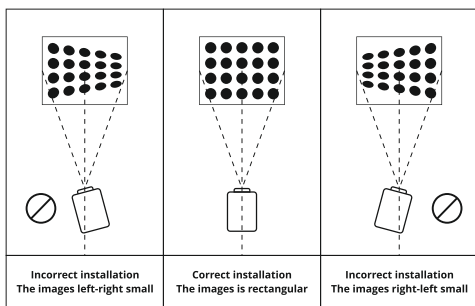

Focus and Keystone Adjustment:

Note: There is no manual focus, it has only electronics focus. Do not rotate the lens or it will get damaged.




Once the projector turns ON, wait till it gets loaded. Only after boot-up you'll be able to adjust the focus using the focus control buttons of the remote as mentioned in the image.

Electronics Focus


Press the “☺” and “☹” buttons on remote control to adjust the clarity



Auto Focus


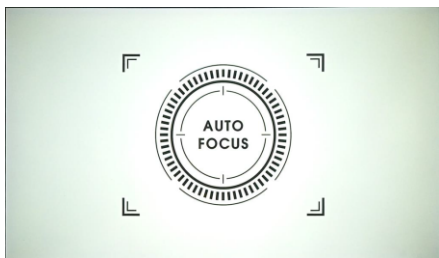


Auto Keystone

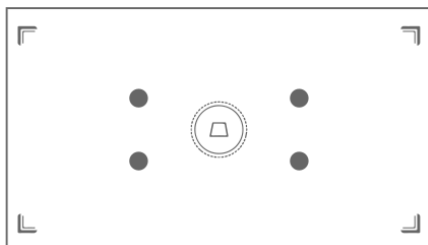



Bluetooth remote pairing

Select IR Remote Control at the top of the home page and the pairing interface will appear

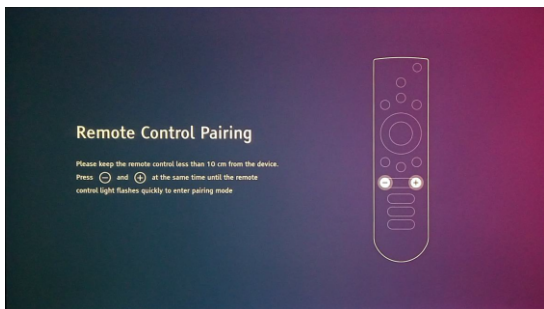
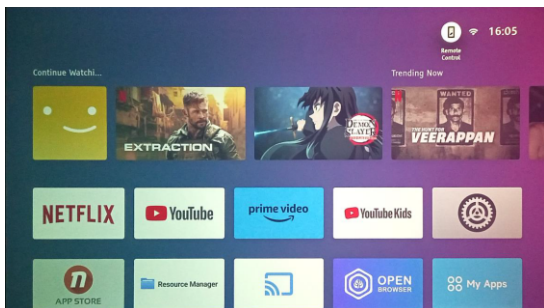


Settings

Open the homepage and select settings. This settings houses the following submenus: Network & Internet, Bluetooth, Input / HDMI, Picture, Display & Sound, and system.

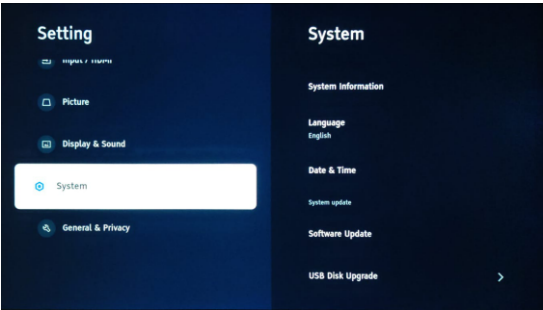
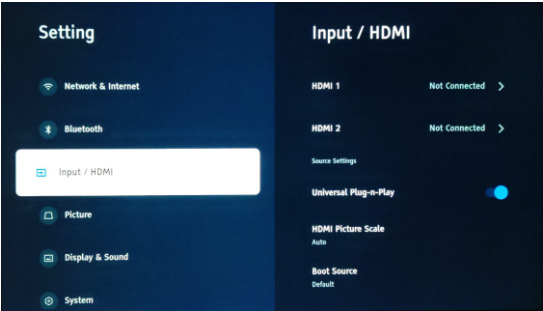


USB Connections

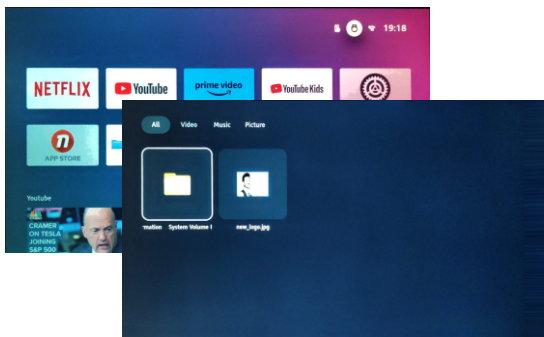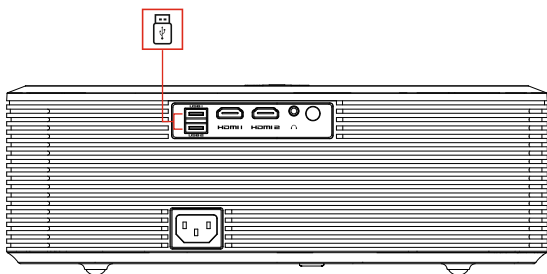


Connect the USB drive with the content to the projector. You can access the USB drive by either clicking on the USB icon that pops up on the homepage or by using the file menu next to the settings icon. The above mentioned screen will pop up. You can easily access the media either category wise-videos / Photos or from the folder itself and play them.

HDMI Interface

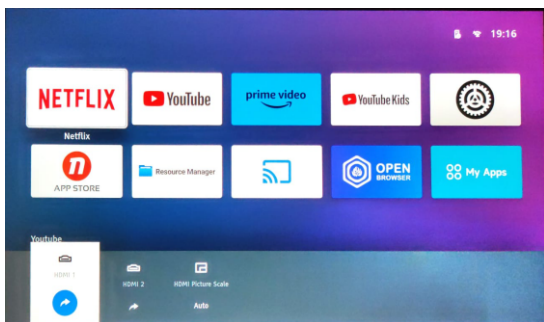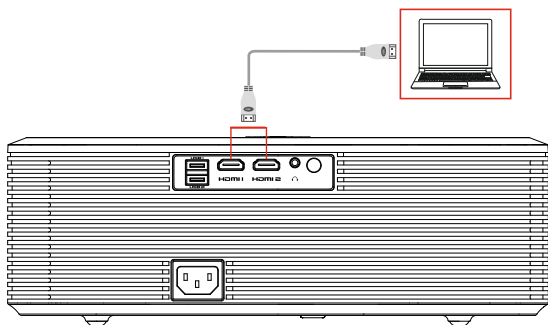

Once the HDMI interface is connected to the projector, you will need to select the specific signal source as the input. After connecting the content played on the source will be streamed on the projector.

Projector distance & size

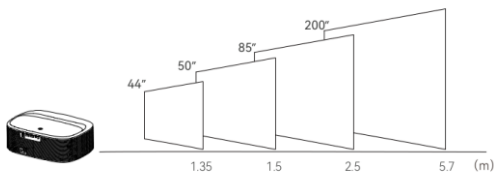

Note:

Due to optical device error of about 3%, the above data is for reference only, Please use actual measurement when installing the device.

ISO 9001:2015 Certified Company
www.zebronics.com