



Smart LED Projector

# PixaPlay<sup>®</sup> 58



## User Manual

[www.zebronics.com](http://www.zebronics.com)

## Dear Customer,

Thank you for purchasing the **ZEB-Pixaplay 58 SMART LED Projector**. Please read the user manual carefully before usage & save it for future reference.

### **Note:**

- *To provide a stable power supply, kindly use the cable provided with the product and connect to a AC 230V 50/60Hz power source.*

- *Avoid the self-disassembly of the product as it results in voiding of the product's warranty.*

- *Avoid looking directly at the projector lens while it is active.*

- *Make sure that the projector's air vents are not blocked while in use. The device must be kept in a well ventilated surrounding for proper functioning.*

- *It is recommended to power OFF the projector after a continuous usage of 6 hours maximum.*

- *Place the projector away from water or other liquids. Avoid water accumulation and ensure good ventilation.*

- *In case of enquiry regarding the projector, email us at [enquiry@zebronics.com](mailto:enquiry@zebronics.com) or contact us at 044 4000 0004.*

## Features :

- Home Theater Projectors for Movies, TV & Gaming etc.
- Projector comes with AV IN, AUX OUT, USB x 2, HDMI x 3
- Built in Speakers
- Wide Compatibility
- Remote Control

## Specification :

Screen Size	: 127-533cm
Native Resolution	: 1920 x 1080 FHD
Max. Supported Resolution	: 1080p (Max.)
RAM	: 1 GB
Core Processor	: Quad Core Processor
Storage	: 8 GB
Android Version	: 9.0
Wi-Fi Connectivity	: Dual band Connectivity (2.4GHz & 5GHz)
BT Version	: v5.0
Lamp Lifespan	: 50,000h
Brightness	: 12000 Lumens
Contrast Ratio	: 1500:1
Projection Distance	: 1.8m - 7.0m
Port Interface	: AV IN, AUX OUT, USB x 2, HDMI x 3
Video File Format	: AVI, MPG, MOV, FLV, M2TS, M4V, MTS, MP4, MKV
Input Voltage	: AC 100-240V, 50/60Hz

Product Dimension : 25.5 x 19.8 x 10.6 cm  
(W x D x H)

Net. Weight : 1.9kg

## Package Contents:

Projector : 1 U

Remote Control : 1 U


Power cord : 1 U

HDMI Cable : 1 U

Cleaning cloth : 1 U


QR Code Guide : 1 U

## Product Description:

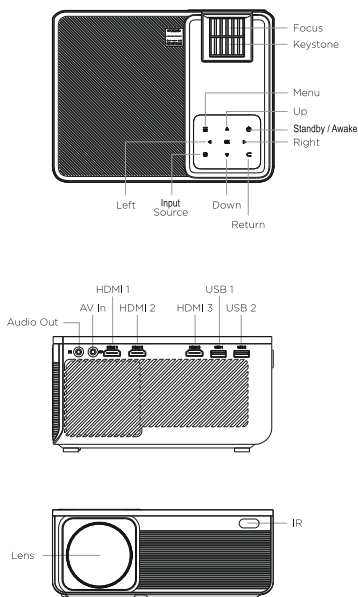




**Remote Control :**

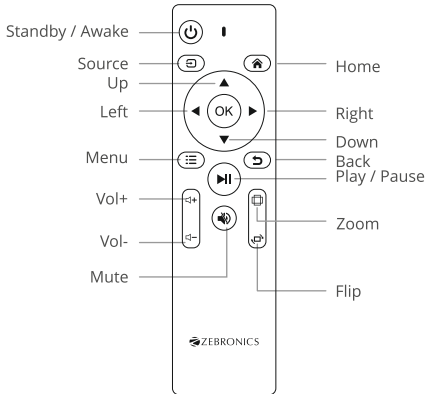

**Setting Up the Projector :**


1.Before turning on make sure to place it in a flat surface for proper projection, then press the power button on the projector or on the remote.

2.Align the projector as shown in the image below to ensure proper projection.

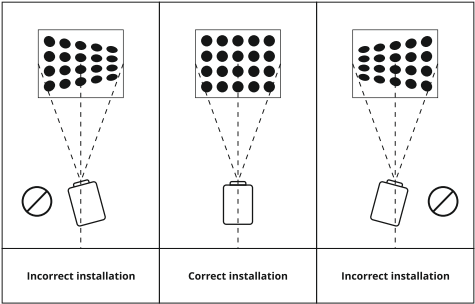

## Projector distance & size :

The recommended projection screen size is 127-533cm. To improve your viewing experience, ensure you have a room where you can control the lighting. These factors work together to provide a visually stunning and immersive viewing experience.

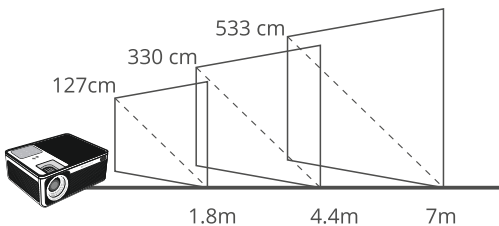


### Note:

*Due to optical device variation of about 3%, the above data is for reference only.*

## BT remote control setup instructions :


Follow the instruction mentioned in the below image to activate and setup BT remote with the projector.

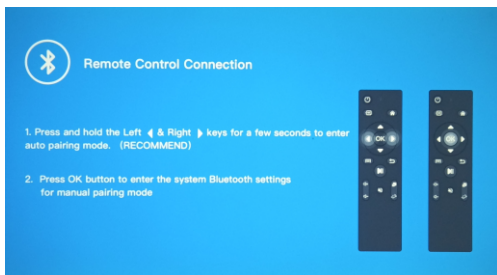


## Input connection instructions :

Follow the steps below for the connection procedure and then press the input source button on the remote/projector and choose the respective input option.


### A. HDMI Connection

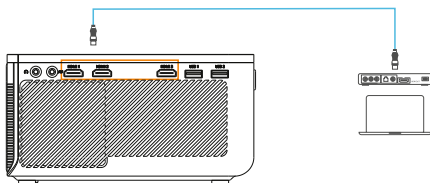

### B. AV Connection

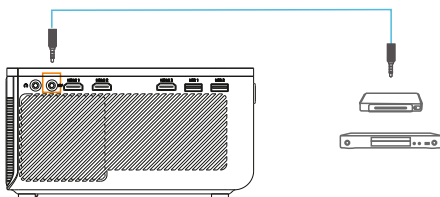


### C. USB Connection

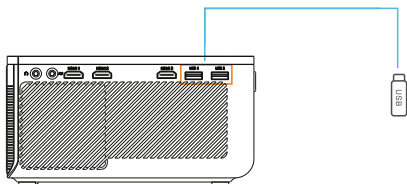

## Android Home :


1. Once the projector is turned on you'll be directed to the home screen.

2.The Home screen displays Fav Apps, App store, Settings Menu, File Manager, Input Source - HDMI,USB,AV, etc.

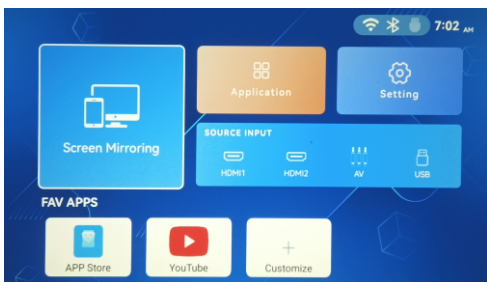

## Settings:


This settings houses the following submenus : Network settings, Bluetooth settings, projection settings, language setting, system update, other settings.

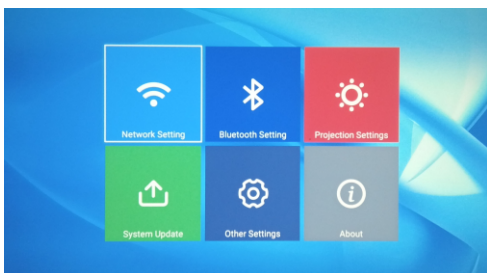

## Bluetooth Setting :

1. Go to( Settings ) > ( BT Setting)
2. Turn the BT Connection on and search for nearby BT devices.
3. Select your BT device and connect with it.

## Speaker Mode :

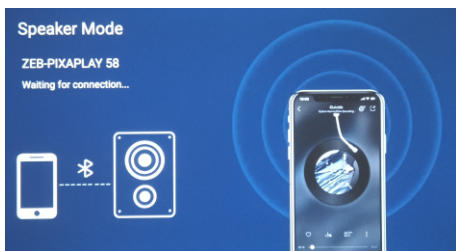

1. Go to settings > Speaker Mode and you can find this device name showing up on your source device. Tap on it and pair with it to use the projector as a BT speaker.

## Screen Mirroring :

Connect your iOS, Android, Laptop or Tablet wirelessly via the device mirroring option. Local photos and videos support screen mirroring.

*Note : Please ensure the projector and your device have been connected to the same Wi-Fi, if there is no Wi-Fi please open a hotspot on your device and connect the projector.*

**ISO 9001:2015 Certified Company**  
**[www.zebronics.com](http://www.zebronics.com)**

