



Smart LED Projector
PixaPlay® 63 *Plus*



User Manual

www.zebronics.com

Dear Customer,

Thank you for purchasing the **ZEB-Pixaplay 63 Plus** Smart LED Projector. Please read the user manual carefully before usage& save it for future reference.

Note :

- *To ensure a stable power supply, use the power cable provided with the product and connect it to an AC 100—240 V power source. Alternatively, the projector can also be powered using a USB Type-C Power Delivery (PD) charger rated at 65 W*

- *Avoid the self-disassembly of the product as it results in the failure of Warranty.*

- *Avoid looking directly at the projector lens while it is active.*

- *Make sure that the projector's air vents are not blocked while in use. The device must be kept in a well ventilated surrounding for proper functioning.*

- *It is recommended to power OFF the projector after a continuous usage of 6 hours.*

- *Place the projector away from water or other liquids. Avoid water accumulation and ensure good ventilation.*

- *In case of enquiry regarding the projector, email us at enquiry@zebronics.com or contact us at 044 40000004.*

Features :

- 7000 Lumens
- 4k support
- FHD 1080p (Native)
- Upto 304 cm Screen Size
- Auto Keystone Adaptation*
- Auto Focus Technology
- 30,000h Lifelong LED Lamp
- 90° Tilt Mechanism
- Multi Connectivity (BT v5.4 | HDMI (ARC) | USB | AUX OUT)
- Built in Speakers
- Dual band Connectivity (2.4GHz & 5GHz)
- Remote Control
- Quad Core Processor
- Miracast
- IOS Screen Mirroring
- Smart Projector
- APP Support
- Wall Mountable | Tripod support
- Support Type C Power

**For vertical adjustment only.*

Specification :


Model	: ZEB-MLP 7
Screen size	: 101.6- 304 cm
Native Resolution	: 1920 x 1080p FHD
Max. Supported Resolution	: 4K
Core Processor	: Quad Core Processor

Android Version	: 12
Wi-Fi Connectivity	: WiFi 6 Dual Band Connectivity (2.4GHz & 5GHz)
Bluetooth Version	: v5.4
Lamp Lifespan	: 30,000h
Brightness	: 7000 Lumens
Contrast Ratio	: 500:1
Projection Distance	: 1.11m - 3.32 m
Port Interface	: BT v5.4 HDMI (ARC) USB AUX OUT
Video file format	: AVI MP4 MKV FLV MPG
Input Voltage	: DC 24V=3A Type C - ≥65W
Product Dimension (W x D x H)	: 9.5 x 19 x 24.5 cm
Net. weight	: 850 g


Package Contents:

Projector	: 1 U
Remote Control	: 1 U
Power Adapter	: 1 U
HDMI Cable	: 1 U
QR code Guide	: 1 U
Cleaning Cloth	: 1 U

Product Description :

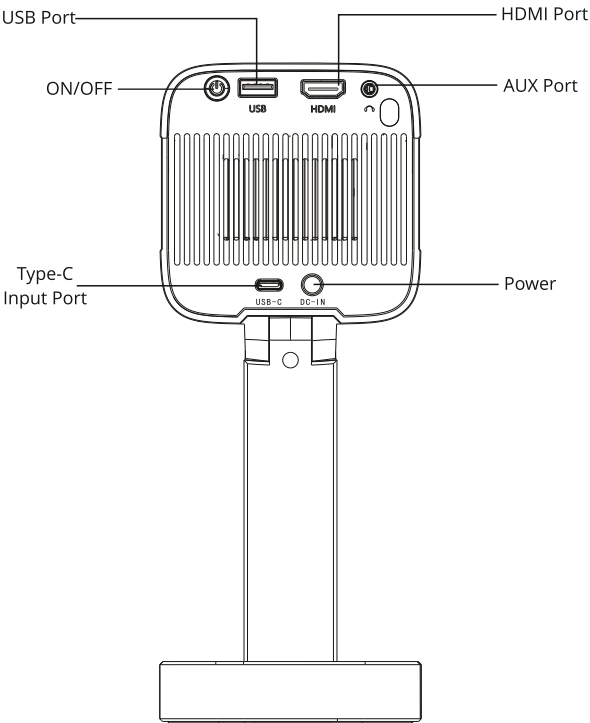


Remote Control :

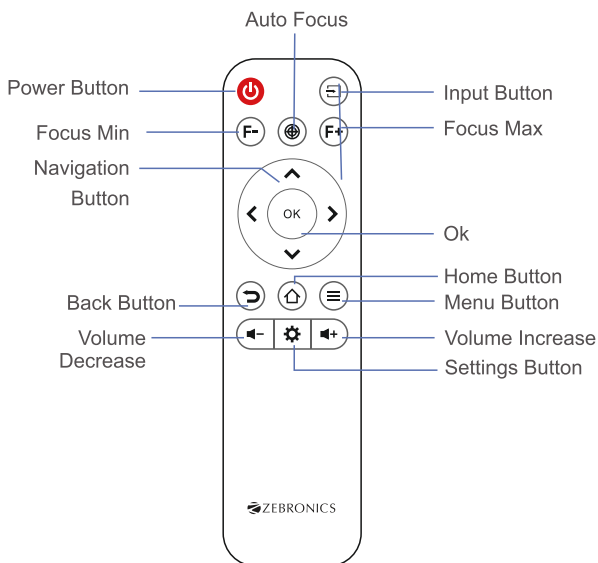

- Long Press the **Menu Button** to ON/OFF the Mouse Cursor.

Setting Up the Projector :


1. Connect the power adapter to the projector, then plug it into a power outlet and turn on the projector.

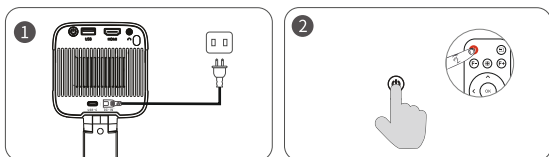

2. Before turning ON, make sure to place it in a flat surface for a proper projection then press the power button / turn it on by using the remote.


Projection Distance and Size :

The recommended projection screen is around 40-120 inches with a distance of around 1.11m-3.32m. To improve the clarity of your projected images, it is recommended to create ambient darkness and use a high-quality project screen. These factors work together to provide a visually stunning and immersive viewing experience.

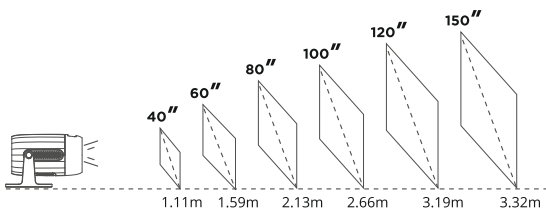

Note: The above mentioned image is for indicative purpose alone while in actual product, the distance to screen size may vary from the values mentioned above.

Projection Modes :

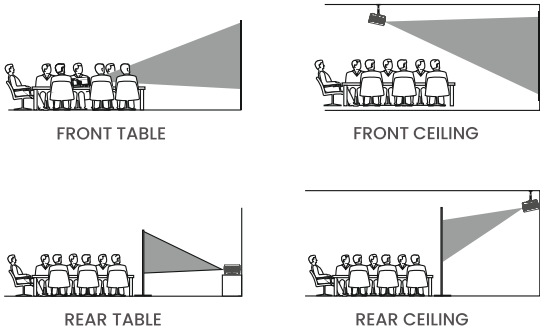


Focus & Keystone Adjustment:

The Projector has Auto Focus Technology and Auto Keystone Adaptation. The Focus can also be adjusted according to the user using the remote control. Keystone Settings can be accessed in the Display Settings under Menu option.



Digital Zoom :


1. Go to **Setup > Projection Settings**
2. Choose **Digital Zoom**
3. Press **Down button V** to Zoom out (100% - 70%) and **Up button ^** to Zoom in (70% - 100%).

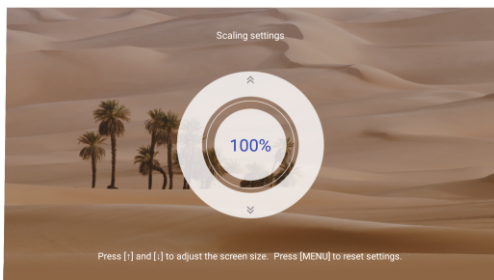


Connection Settings :

USB Connection :



Plug the USB to the port present at the rear side of the projector. Now navigate to the USB tab present in the homepage.

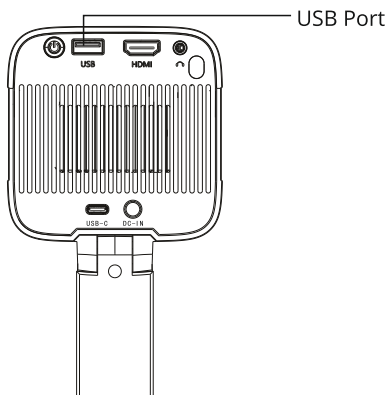

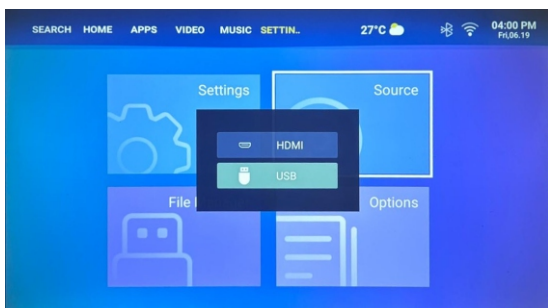


HDMI Connection :

Once the HDMI is connected to the projector, you will need to select the specific signal source as input. After connecting, the content played on the source will be streamed on the projector.

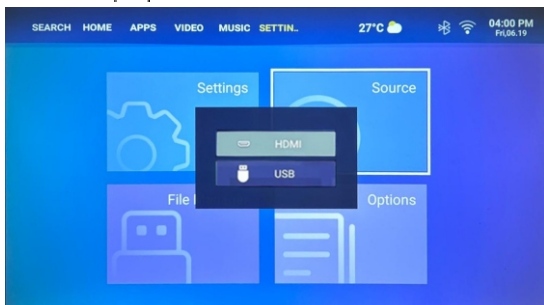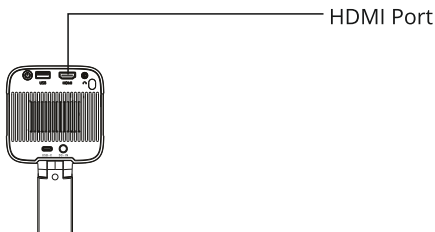


Bluetooth Connection :

1. Go to set up > Bluetooth settings.
2. Turn the Bluetooth Connection On and search for nearby bluetooth devices.
3. Choose the desired bluetooth device to pair and connect.

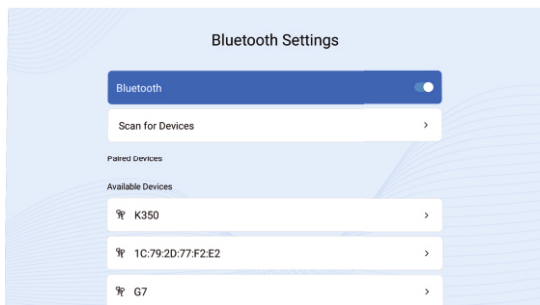

Wifi Connection :

1. Goto Homepage> Setup> WiFi Setting.
2. Turn the WiFi ON and search the WiFi list by "Add WiFi"
3. Select your WIFI then enter password to connect.

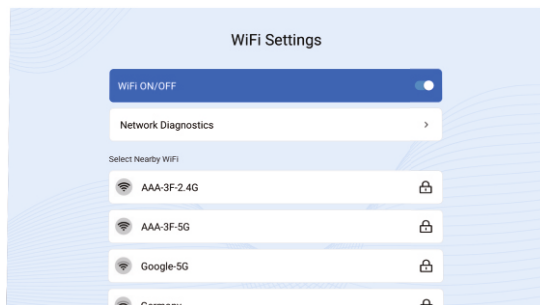

ISO 9001:2015 Certified Company
www.zebronics.com

