



Smart LED Projector

PixaPlay® 63



User Manual

www.zebronics.com

Dear Customer,

Thank you for purchasing the **ZEB-Pixaplay 63** Smart LED Projector. Please read the user manual carefully before usage & save it for future reference.

Note :

- *To provide a stable power supply, kindly use the cable provided with the product and connect to a **(AC100V-240V)** power source.*

- *Avoid the self-disassembly of the product as it results in the failure of Warranty.*

- *Avoid looking directly at the projector lens while it is active.*

- *Make sure that the projector's air vents are not blocked while in use. The device must be kept in a well ventilated surrounding for proper functioning.*

- *It is recommended to power OFF the projector after a continuous usage of 6 hours.*

- *Place the projector away from water or other liquids. Avoid water accumulation and ensure good ventilation.*

- *In case of enquiry regarding the projector, email us at enquiry@zebronics.com or contact us at 044 40000004.*

Features :

- ◆ Home Theater Projectors for Movies, TV & Gaming etc.
- ◆ Built in Speaker
- ◆ Wide Compatibility
- ◆ 200° Tilt Mechanism
- ◆ Auto Keystone Adaptation*
- ◆ Remote Control
- ◆ Miracast
- ◆ IOS Screen Mirroring
- ◆ Dual Band Connectivity (2.4GHz & 5GHz)
- ◆ FHD 1080p (Native)
- ◆ APP Support

**For vertical adjustment only.*

Specification :





Screen Size	: 101.6 - 381cm
Native Resolution	: 1920 x 1080p FHD
Max. Supported Resolution	: 1920 x 1080p (Max.)
Android Version	: 12.0
RAM	: 1 GB
Core Processor	: Quad Core Processor
Storage	: 8 GB
Wi-Fi Connectivity	: Dual Band Connectivity (2.4GHz & 5GHz)
BT Version	: v5.4
Lamp Lifespan	: 30,000h
Brightness	: 5000 Lumens
Contrast Ratio	: 1000:1

Projection Distance	: 1.06 - 3.98 m
Port Interface	: USB x 1, HDMI IN x 1, AUX OUT
Video File Format	: H264, MPEG2, MPEG4, VC1, V-VP8, WMVP9, MJPEG, AVC, FLV1, M-JPEG, Xvid
Input Voltage	: AC 100-240V 50Hz
Product Dimension (W x D x H)	: 13 x 19.5 x 14.5cm
Net. Weight	: 850Kg


Package Contents:

Projector	: 1 U
Remote Control	: 1 U
Power Cord	: 1 U
HDMI Cable	: 1 U
Cleaning Cloth	: 1 U
LED Diffuser	: 1 U
QR Code Guide	: 1 U

Product Description :

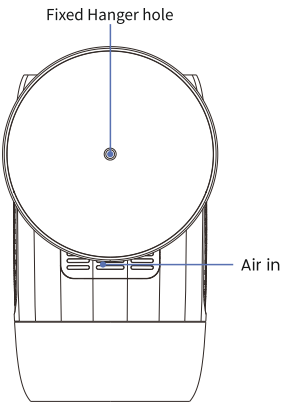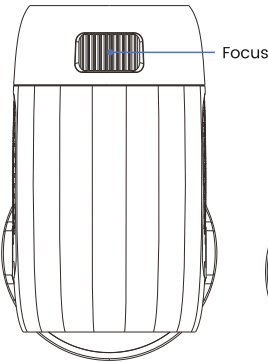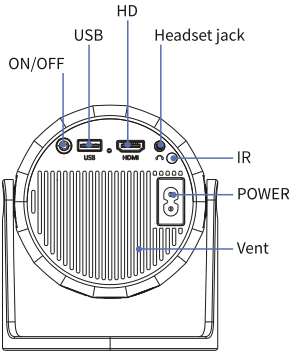



Remote Control :

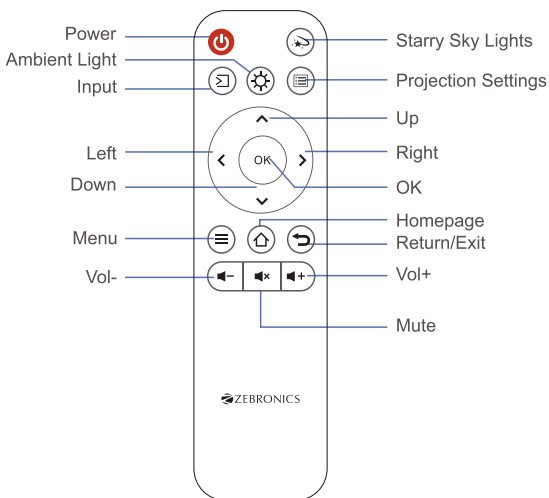

Setting Up the Projector :


1. Connect the power Adapter to the socket of the projector and turn it ON.



2. Before turning ON, make sure to place it in a flat surface for a proper projection then press the power button / turn it on by using the remote.

Projection Distance and Size :

The recommended projection screen is around 100-120 inches with a distance of around 1-4m. To improve the clarity of your projected images, it is recommended to create ambient darkness and use a high-quality project screen. These factors work together to provide a visually stunning and immersive viewing experience.

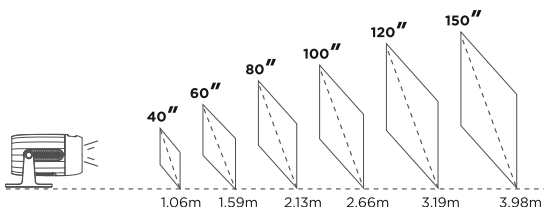


Note: The above mentioned image is for indicative purpose alone while in actual product, the distance to screen size may vary from the values mentioned above.

Projection Modes :




FRONT TABLE



FRONT CEILING



REAR TABLE



REAR CEILING

Projection Settings :

Manual Focus :


Press - button and + button to adjust the picture clarity.



Note: Auto focus feature is not available, the product features only manual focus.

4 Point Keystone Adjustment :

1. Go to **Set up > Projection Settings**
2. Choose **Four Points correction**, Press Direction Buttons to adjust the position Press **"OK"** button to jump to the next corner adjustment, and when the circle in the center is a perfect circle, the screen ratio conforms to the system settings.

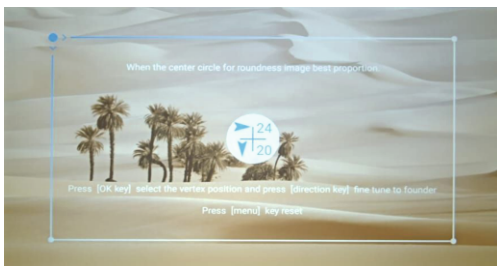

Digital Zoom :


1. Go to **Set up > Projection Settings**
2. Choose **Digital Zoom**
3. Press **Down button V** to Zoom out (100% - 70%) and **Up button ^** to Zoom in (70% - 100%).



Connection Settings :


USB Connection :

Plug the USB to the port present at the rear side of the projector. Now navigate to the USB tab present in the homepage.

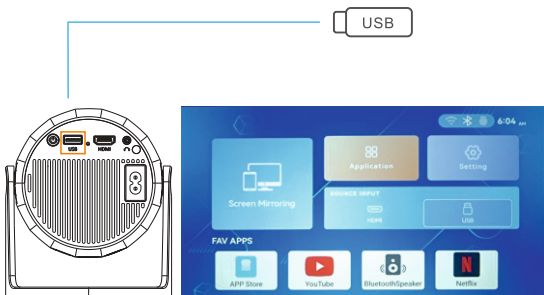

HDMI Connection :

Once the HDMI is connected to the projector, you will need to select the specific signal source as input. After connecting, the content played on the source will be streamed on the projector.

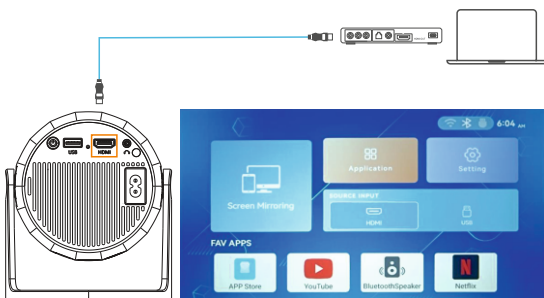


Bluetooth Connection :

1. Go to **set up > Bluetooth** settings.
2. Turn the Bluetooth Connection **On** and search for nearby bluetooth devices.
3. Choose the desired bluetooth device to pair and connect.



Wifi Connection :

1. Go to **Homepage > Setup > WiFi Setting**.
2. Turn the **WiFi ON** and search the WiFi list by **"Add WiFi"**
3. Select your WIFI then enter password to connect.

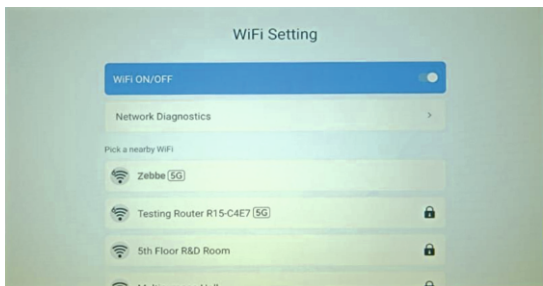

Wired Connection :

1. Go to **Homepage > Setup > Network > Wired Setting > Ethernet Setting > Auto IP (On)**.
2. Insert the wired cable into the LAN interface of the projector to use the wired network.