



Smart LED Projector

PixaPlay® 74B



User Manual

www.zebronoics.com

Dear Customer,

Thank you for purchasing the **ZEB-Pixaplay 74B Smart LED Projector**. Please read the user manual carefully before usage & save it for future reference.

Note:

- *To provide a stable power supply, kindly use the power adapter provided with the product and connect to a AC 100-240V, 50Hz power source.*
- *Avoid the self-disassembly of the product as it results in the failure of Warranty.*
- *Avoid looking directly at the projector lens while it is active.*
- *Make sure that the projector's air vents are not blocked while in use. The device must be kept in a well ventilated surrounding for proper functioning.*
- *It is recommended to power OFF the projector after a continuous usage of 6 hours.*
- *Place the projector away from water or other liquids. Avoid water accumulation and ensure good ventilation.*
- *In case of enquiry regarding the projector, email us at enquiry@zebronics.com or contact us at 044 4000 0004.*

Features :

- Home Theater Projectors for Movies, TV & Gaming etc..
- FHD 1080p (Support)
- Upto 381 cm Screen Size
- Auto Keystone Adaptation *
- 30,000h Lifelong LED Lamp
- Multi Connectivity (BT v5.4 | HDMI | USB)
- Built in Speaker
- Dual band Connectivity (2.4GHz & 5GHz)
- Remote Control
- Quad Core Processor
- Miracast
- IOS Screen Mirroring
- Smart Projector
- APP Support
- Type-C Charging
- Built-in Battery

**For vertical adjustment only.*

Specification :


Model	: ZEB-JLP 4
Screen size	: 101.6 - 381 cm
Native Resolution	: 1280 x 720p HD
Max. Supported Resolution	: 1080p
RAM	: 1 GB
Core Processor	: Quad Core Processor
Storage (ROM)	: 8 GB

Android version	: 13.0
Wi-Fi Connectivity	: Wi-Fi 6 - Dual band Connectivity (2.4GHz & 5GHz)
Bluetooth Version	: v5.4
Lamp Lifespan	: 30,000 h
Brightness	: 3600 Lumens
Contrast ratio	: 1000:1
Projection Distance	: 0.85 - 4m
Port Interface	: USB x 1, HDMI x 1, Type-C x 1
Video file format	: MP4
Input Voltage	: DC 18V, 2.3A
Product Dimension	: 8 x 8 x 15.5 cm (Wx Dx H)
Net. weight	: 575g

Package Contents:

Projector	: 1 U
Remote Control	: 1 U
Power Adapter	: 1 U
HDMI Cable	: 1 U
Cleaning Cloth	: 1 U
QR code Guide	: 1 U

Product Description:

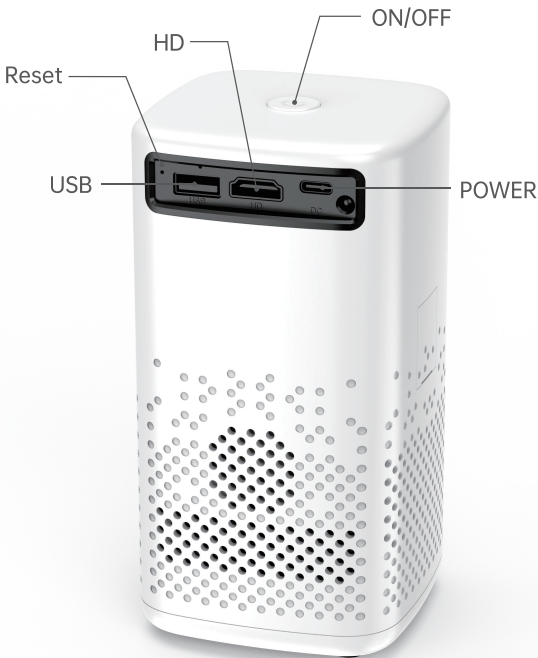


Remote Control:



Setting up the Projector:

1. Connect the power cord to the socket of the projector and turn it ON.
2. Before turning ON, make sure to place it in a flat surface for a proper projection then press the power button / turn it on by using the remote.
3. Align the projectors as shown in the image below to ensure proper projection.

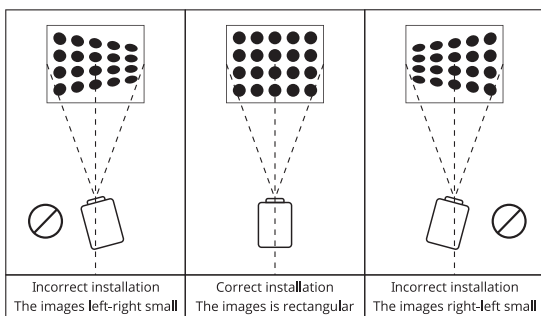

Focus & Keystone Adjustment


Note: There is no manual focus, it has only electronic focus. Do not rotate the lens or it will be damaged.



Once the projector turns ON, wait till it gets loaded. Only after boot-up you'll be able to adjust the focus lens using the remote as shown in the image above.

Projection Distance and Size:

The recommended projector screen size is upto 381 cm. For an improved viewing experience, it is recommended to use the projector in a room that provided as much darkness as possible.

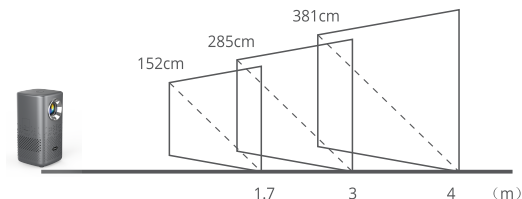

Note: The above mentioned image is for indicative purpose alone while in actual product, the distance to screen size may vary from the values mentioned above.

Android Home:



1. Once the projector is turned on you'll be directed to the home screen.

2. The home screen displays list of pre-installed apps, Playstore, Setting menu, File Manager, Input source - HDMI etc.

USB Connection:




Connect the USB Drive with the content to the projector. You can access the USB drive by either clicking on the USB icon that pops up on the home page or by using the file menu next to the setting icon. The above mentioned screen will pop-up. You can easily access the media either category wise - videos / photos or from the folder itself and play them.

HDMI Connection:



Once the HDMI interface is connected to the projector, you will need to select the specific signal source as the input. After connected the content played on the source will be streamed on the projector.


Settings:

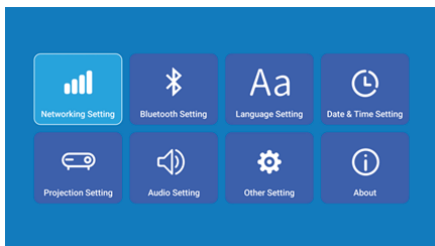

Open the homepage, select settings, you can select network settings, Bluetooth settings, projection settings, language settings, date

settings, application management, system update, other settings and you can modify related setting options on this projector.


WiFi Settings:

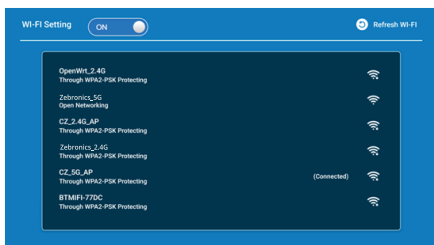

Network Settings:

1. Go to Settings > Network settings.
2. WIFI setting, WIFI "ON".
3. Select the Desired network and input password to connect to the network.

Bluetooth Settings:

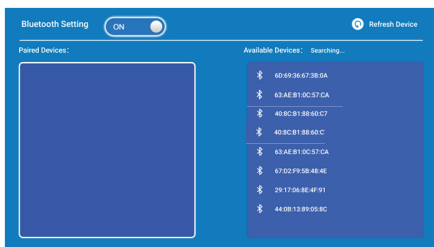

1. Go to Settings > Bluetooth settings.

2. Turn the bluetooth connection ON and search for nearby bluetooth devices.
3. Choose the desired bluetooth device to pair and connect.

Usage Instructions:

- The projector consists of a Built-in Rechargeable Battery that allows the projector to run on battery power.
- Kindly use the Power Adapter provided with the projector to recharge or use the projector on power supply.