



Smart LED Projector

PixaPlay® 78



User Manual

www.zebronics.com

Dear Customer,

Thank you for purchasing the **ZEB-Pixaplay 78** Smart LED Projector. Please read the user manual carefully before usage & save it for future reference.

Note:

- *To provide a stable power supply, kindly use the cable provided with the product and connect to a (AC 220-240V) power source.*
- *Avoid the self-disassembly of the product as it results in voiding of the product's warranty.*
- *Avoid looking directly at the projector lens while it is active.*
- *Make sure that the projector's air vents are not blocked while in use. The device must be kept in a well ventilated surrounding for proper functioning.*
- *It is recommended to power OFF the projector after a continuous usage of 6 hours maximum.*
- *Place the projector away from water or other liquids. Avoid water accumulation and ensure good ventilation.*
- *In case of enquiry regarding the projector, email us at enquiry@zebronics.com or contact us at 044 4000 0004.*

Features:


- 7000 Lumens
- FHD 1080p (Native)
- Up to 508cm Screen Size
- Auto Focus & Auto Keystone Adaptation
- 30000h Lifelong LED Lamp
- 160° Tilt Mechanism
- Multi Connectivity (BT v5.4 | HDMI (ARC) | USB | AUX OUT)
- Built-in Speaker
- Dual Band WiFi (2.4GHz & 5GHz)
- Remote Control (BT+IR)
- Quad Core Processor
- Leatherette Carry Strap
- Miracast
- iOS Screen Mirroring
- APP Support

Specification:

Model	: ZEB-SLP 7
Screen size	: 117 - 508cm
Native Resolution	: 1920x1080p
Max. Supported Resolution	: FHD 1080p
Core Processor	: Quad core Processor
Android TV OS Version	: 12
Wi-Fi Connectivity	: Dual Band WiFi (2.4GHz & 5GHz)
Bluetooth Version	: v5.4

Lamp Lifespan	: 30000h
Brightness	: 7000 Lumens
Dynamic Contrast Ratio	: 2000:1
Projection Distance	: 1.2 - 5.5 m
Port Interface	: BT v5.4 HDMI (ARC) USB AUX OUT
Video file format	: AVI MP4 MKV FLV MOV MPG
Input Voltage	: AC 100-240V, 50/60Hz
Product Dimension	: 23.3 x 19.4 x 15 cm (W x D x H)
Net. weight	: 1.2kg


Package Contents:




Projector



Remote Control




Power Cord



HDMI Cable




QR Code Guide




Cleaning Kit

Product Description

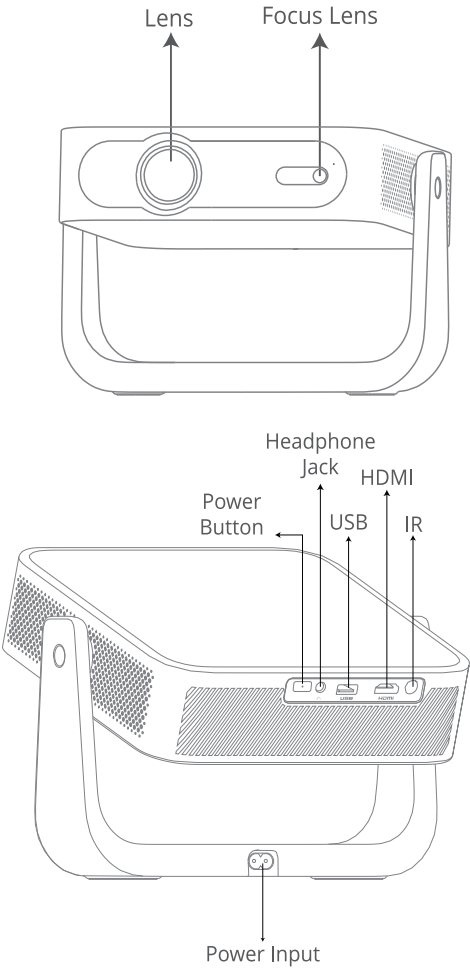

Remote Control

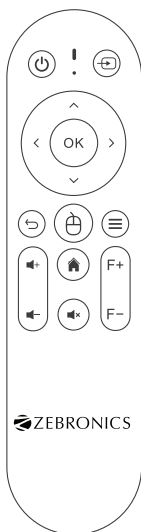

Power button

Turn on/off



Input button

Choose to enter the HDMI & USB



Direction buttons

^ Up v Down
< Left > Right
⊙ OK



Return button

Returns to last step



Mouse mode switching button

After switching, you can move the cursor with the up, down, left and right buttons and confirm with the OK button



Menu button

Enter the setting page



Volume button

Volume +, Volume -



Home button

Short press and return to the home page



Mute button

Mute




Focus button

Adjust focal distance


Setting Up the Projector:

1. Plug the Power cord into the projector's AC power input. Insert the other end of the power cord into a standard wall power socket. Ensure the wall socket is turned on to supply power.
2. Please place the projector on a flat surface to ensure proper projection. Now turn the projector On by pressing the power button either on the panel or on the remote.
3. The projector should be aligned straight to the screen / the place of projection.

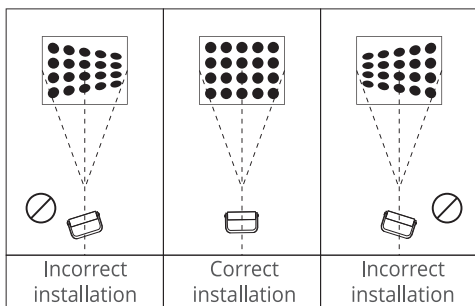

Projector distance & size :

The recommended projection screen size is 117 - 508 cm. For an improved viewing experience, it is recommended to use the projector in a room that provides as much darkness as possible.

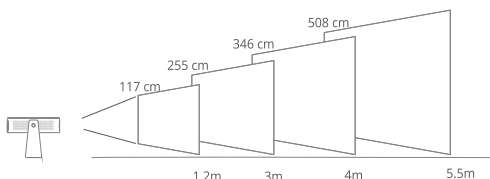

Note: The above mentioned image is for indicative purpose alone while in actual product, the distance to screen size may vary from the values mentioned above.

BT remote control setup

instructions :

Follow the instruction mentioned in the below image to activate and setup BT remote with the projector.

Bluetooth Pairing Method

Bluetooth Pairing Operation

Press and hold both the left button ◀▶ and the right button on the remote control to activate the automatic pairing interface. Release the buttons when the LED starts blinking rapidly. Place the device within 50 cm of the host to pair via Bluetooth. The LED will stop blinking once pairing is successful.


Pairing Method



Projection Settings

1. Auto Focus

By default, the auto focus mode of the projector is enabled, allowing it to quickly detect and adjust to the optimal clarity of the screen when it is turned on.

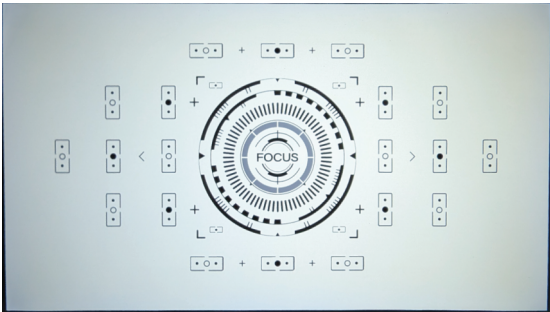

2. Electronic Focus

Press the F+ button and F- button in the remote to adjust the picture clarity.




3. Digital Zoom

- Go to Settings- Projection Settings
- Choose Digital Zoom
- Press Down Button to Zoom Out and Up Button to Zoom In.



4. Auto Keystone

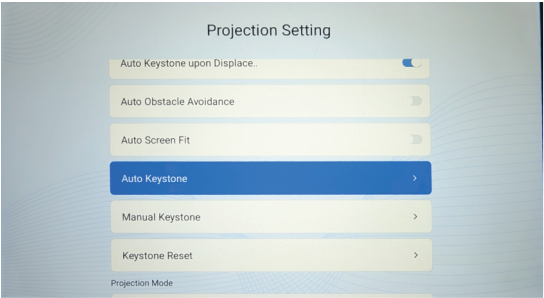


4. Manual Keystone

Select and enter Quadrangular trapezoid, use the “OK” key of the remote control to switch the points to be adjusted, and then use the “direction key” to adjust different points. The “menu” key can reset the display effect, and the “return” key can return to the upper screen and save the adjustment effect.




6. Projection Mode

Select and enter "Projection Mode", there are four options: "Front-Desktop", "Rear-Desktop", "Front-Ceiling", and "Rear-Ceiling".

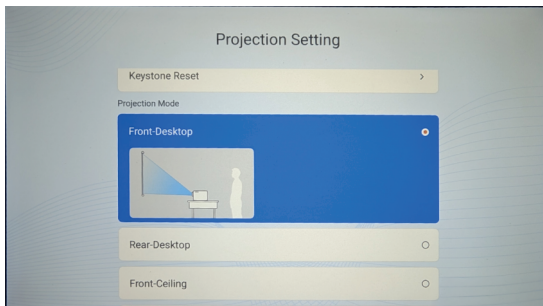

Android Home

1. Once the Projector is turned on, the projector will lead you to the home screen.
2. The Home Screen displays applications, Settings source, Screen Mirroring.

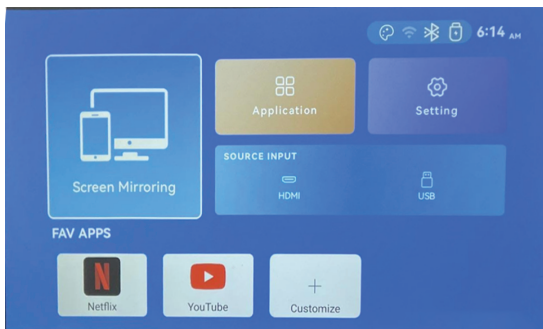


Settings

Switch to home page, open the settings main menu. This menu contains sub menu like...

Miracast connection:

First Step

Choose the corresponding miracast methods



Second Step


Operate according to the text prompts



USB Interface

Plug the USB to the port present at the rear side of the projector. Now navigate to the USB tab present in the home page.


USB Interface



HDMI Interface


Once the HDMI is connected to the projector, you will need to select the specific signal source as input. After connecting, the content played on the source will be streamed on the projector.

HDMI Interface




Bluetooth Settings

1. Go to Settings> Bluetooth Settings.
2. Turn the Bluetooth connection on and search for nearby bluetooth devices.
3. Choose the desired bluetooth device to pair and connect.

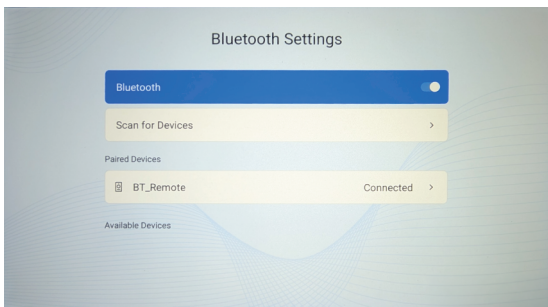

In the apps Speaker Mode is available by entering into speaker select Bluetooth speaker on your source device and then projector will act as a Bluetooth speaker

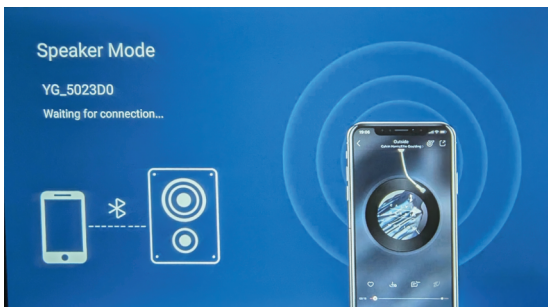


File Manager

Enter Applications > File Manager to view external storage devices such as USB drives in the file manager.

Network Settings:

Enter Settings > Network, in the Wi-Fi settings interface, connect to a network using one of the following methods:

- Select the target Wi-Fi network from the available network list. If the network is encrypted, you'll need to enter the password.
- Pull down the page, select **"Add WiFi"**, and follow the on-screen prompts to enter the network name and access password to

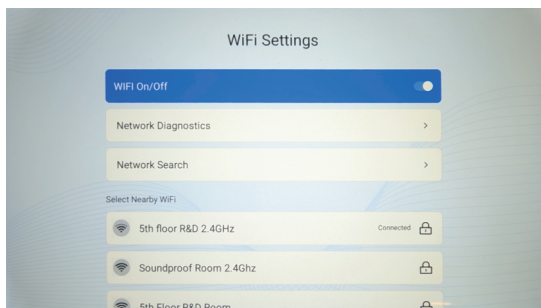

ISO 9001:2015 Certified Company
www.zebronics.com