ZEBRONICS

Smart LED Projector

PixaPlay® 79



User Manual

www.zebronics.com

Dear Customer,

Thank you for purchasing the **ZEB-Pixaplay 79** Smart LED Projector. Please read the user manual carefully before usage & save it for future reference.

Note:

• To provide a stable power supply, kindly use the cable provided with the product and connect to a (AC 100-240V) power source.

•Avoid the self-disassembly of the product as it results in voiding ofthe product's warranty.

•Avoid looking directly at the projector lens while it is active.

•Make sure that the projector's air vents are not blocked while in use. The device must be kept in a well ventilated surrounding for proper functioning.

•It is recommended to power OFF the projector after a continuous usage of 6 hours maximum.

•Place the projector away from water or other liquids. Avoid water accumulation and ensure good ventilation.

• In case of enquiry regarding the projector, email us at enquiry@zebronics.com or contact us at 044 4000 0004.

Features:

- 4K Support
- FHD 1080p (Native)
- Up to 457cm Screen Size
- Auto Focus Technology
- Auto Keystone Adaptation
- Auto Obstacle detection & Auto Screen Fit
- 20000h Lifelong LED Lamp
- Multi Connectivity (BT v5.4| HDMI IN x 2 | USB x 2 | AUX OUT | AV IN | RJ45)
- Dual Band WiFi (2.4GHz & 5GHz)
- Built-in Speakers
- Remote Control
- Android & iOS Screen Mirroring
- Quad Core Processor
- Smart Projector
- APP Support

Specification:


Model	: ZEB-LP800
Screen size	: 104 - 457cm
Native Resolution	: 1920 x 1080p
Max. Supported Resolution	: 4K
Core Processor	: Quad core Processor
Android TV OS Version	: 9
Wi-Fi Connectivity	: Dual Band WiFi (2.4GHz & 5GHz)
Bluetooth Version	: v5.4


Lamp Lifespan	: 20000h
Dynamic Contrast Ratio	: 5000:1
Projection Distance	: 1.45 - 6.3 m
Port Interface	: HDMI IN x 2 | USB x 2 |AUX OUT|AV IN|RJ45
Video file format	: AVI | MP4 | MKV | MOV | MPG | H.264 | H.265 | MPEG1 | MPEG2
Input Voltage	: AC 100-240V, 50/60Hz
Product Dimension	: 29 x 25.7 x 11.6 cm (W x D x H)
Net. weight	: 2.9kg

Package Contents :


Projector	: 1 U
Remote Control	: 1 U
Power Cord	: 1 U
HDMI Cable	: 1 U
AV Cable	: 1 U
QR Code Guide	: 1 U
Cleaning Kit	: 1 U

Product Description :

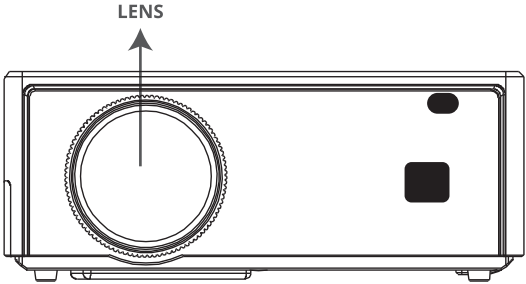

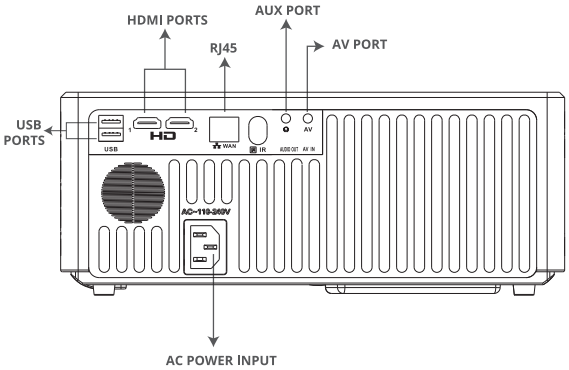

Remote Control :

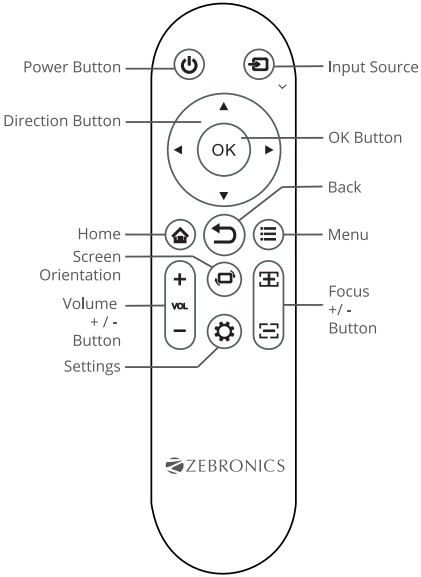


Setting Up the Projector :

1. Plug the Power cord into the projector's AC power input. Insert the other end of the power cord into a standard wall power socket. Ensure the wall socket is turned on to supply power.


2. Please place the projector on a flat surface to ensure proper projection. Now turn the projector On by pressing the power button either on the panel or on the remote.

3. The projector should be aligned straight to the screen / the place of projection.

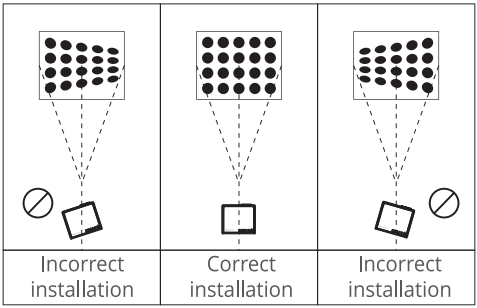


Projector distance & size :

The recommened projection screen size is 104 - 457 cm. For an improved viewing experience, it is recommended to use the projector in a room that provides as much darkness as possible.

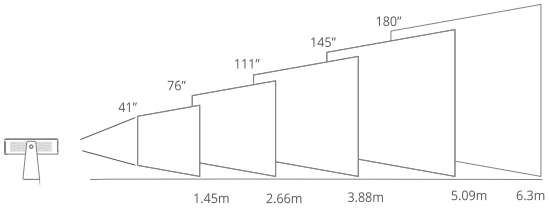


Note: *The above mentioned image is for indicative purpose alone while in actual product, the distance to screen size may vary from the values mentioned above.*

Projection Settings :

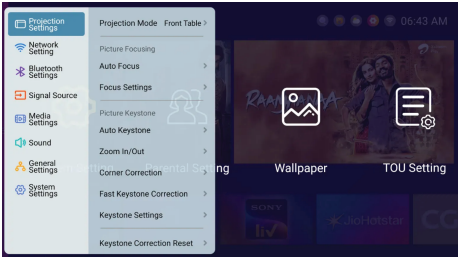


1. Focus Settings

By default, the auto focus mode of the projector is enabled, allowing it to quickly detect and adjust to the optimal clarity of the screen when it is turned on.

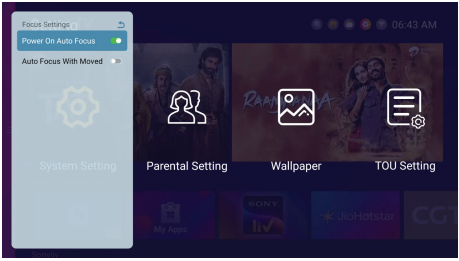


2. Keystone Settings :

Keystone correction allows you to adjust the projected image to maintain a proper rectangular shape when the projector is placed at an angle. Enable automatic keystone correction or adjust the settings manually to align the projected image.

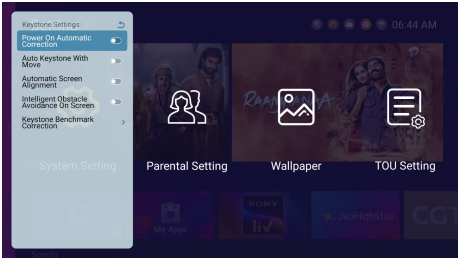


3. Projection Mode :

Select and enter "Projection Mode", there are four options: "Front-Table' "Rear-Table", "Front-Ceiling", and "Rear-Ceiling".

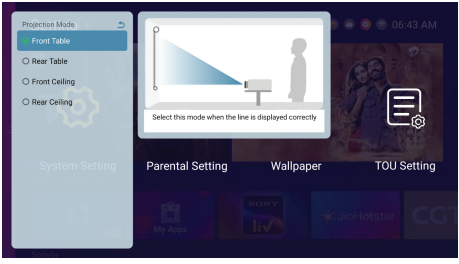

4. Screen Mirroring :

Screen mirroring allows you to wirelessly display the screen of your device on the projector. Choose your preferred Mirroring method and follow the instructions to start mirroring.

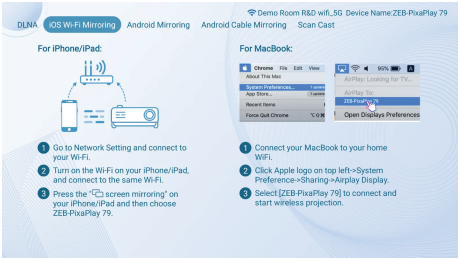



USB Interface :


Plug the USB to the port present at the rear side of the projector. Now navigate to the USB tab present in the home page.



HDMI Interface :

Once the HDMI is connected to the projector, you will need to select the specific signal source as input. After connecting, the content played on the source will be streamed on the projector.



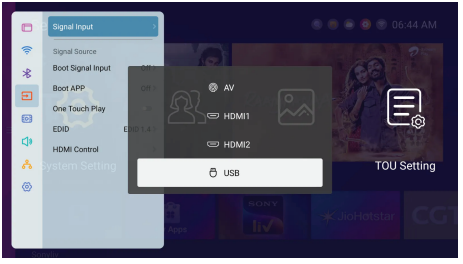


Bluetooth Settings :

1. Go to Settings> Bluetooth Settings.

2. Turn the Bluetooth connection on and search for nearby bluetooth devices.


3. Choose the desired bluetooth device to pair and connect.

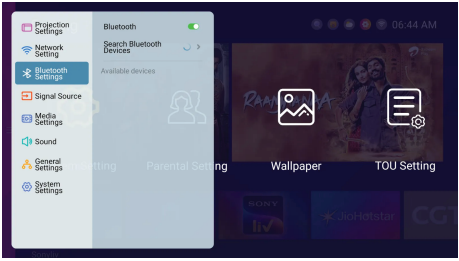

Network Settings :

Enter Settings > Network, in the Wi-Fi settings interface, connect to a network using one of the following methods:

Select the target Wi-Fi network from the available network list. If the network is encrypted, you'll need to enter the password.

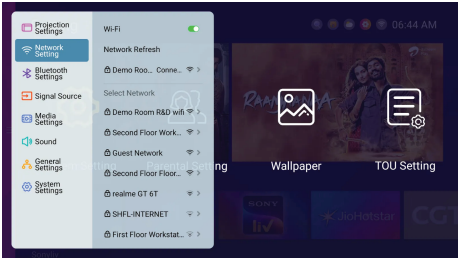

ISO 9001:2015 Certified Company
www.zebronics.com