



Smart Projector

PixaPlay®84



User Manual

www.zebronics.com

Dear Customer,

Thank you for purchasing the **ZEB-PixaPlay 84 Smart Projector**. Please read the user manual carefully before usage & save it for future reference.

Note:

- *To provide a stable power supply, kindly use the cable provided with the product and connect to a (AC100V-240V) power source.*
- *Avoid the self-disassembly of the product as it results in the failure of Warranty.*
- *Avoid looking directly at the projector lens while it is active.*
- *Make sure that the projector's air vents are not blocked while in use. The device must be kept in a well ventilated surrounding for proper functioning.*
- *It is recommended to power OFF the projector after a continuous usage of 6 hours.*
- *Place the projector away from water or other liquids. Avoid water accumulation and ensure good ventilation.*
- *In case of enquiry regarding the projector, email us at enquiry@zebronics.com or contact us at 044 4000 0004.*

Features :

- 5000 Lumens
- 4K Support
- Up to 304.8cm Screen Size
- Auto Keystone Adaptation*
- 30,000h Lifelong LED Lamp
- 200° Tilt Mechanism
- Electronic Focus (via remote)
- Multi Connectivity (BT v5.4 | HDMI | USB | AUX OUT)
- Built in Speaker
- Dual band Connectivity (2.4GHz & 5GHz)
- Remote Control
- Quad Core Processor
- Android & iOS Casting
- Smart Projector
- APP Support
- Tripod Mount Support

**For vertical adjustment only.*

Specification :



Model	: ZEB-QLP 7
Screen size	: 101.6-304.8cm
Native Resolution	: 1280 x 720p HD
Max. Supported Resolution	: 4K
RAM	: 1 GB
Core Processor	: Quad Core Processor
Storage (ROM)	: 8 GB

Android version	: 14
Wi-Fi Connectivity	: Wi-Fi 6 - Dual band Connectivity (2.4GHz & 5GHz)
Bluetooth Version	: v5.4
Lamp Lifespan	: 30,000 h
Brightness	: 5000 Lumens
Contrast ratio	: 1000:1
Projection Distance	: 1.15 - 3.4m
Port Interface	: USB x 1, HDMI IN x 1, AUX OUT
Video file format	: H.263, H.264, H.265, MPEG1, MPEG2, MPEG4, VP8, VP9
Input Voltage	: AC 100-240V 50Hz
Product Dimension	: 14.3 X 11.2 X 18 cm (W x D x H)
Net. weight	: 554g


Package Contents:

Projector	: 1 U
Remote Control	: 1 U
Power Cord	: 1 U
HDMI Cable	: 1 U
Cleaning Kit	: 1 U
QR code Guide	: 1 U

Product Description:

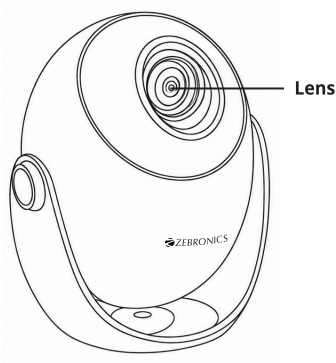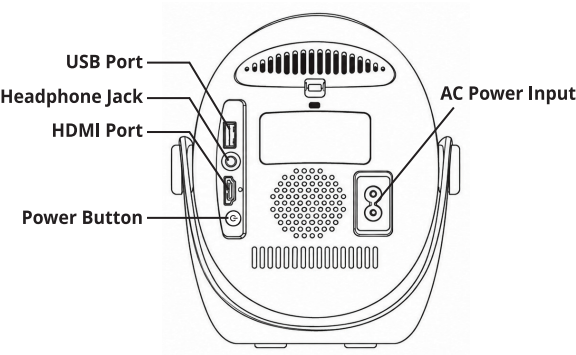


Remote Control:

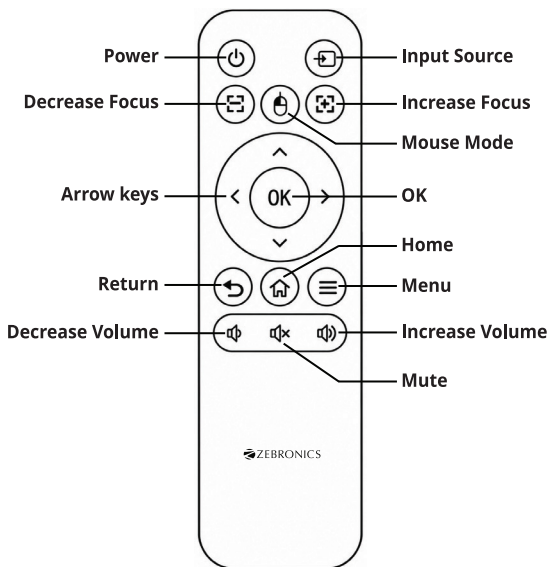

Setting Up the Projector:


- Plug the power cord into the projector's AC power input. Insert the other end of the power cord into a standard wall power socket. Ensure the wall socket is turned on to supply power.
- Please place the projector on a flat surface to ensure proper projection. Now, turn the projector on by pressing the power button either on the panel or on the remote.

- The projector should be aligned straight to the screen/place of projection.

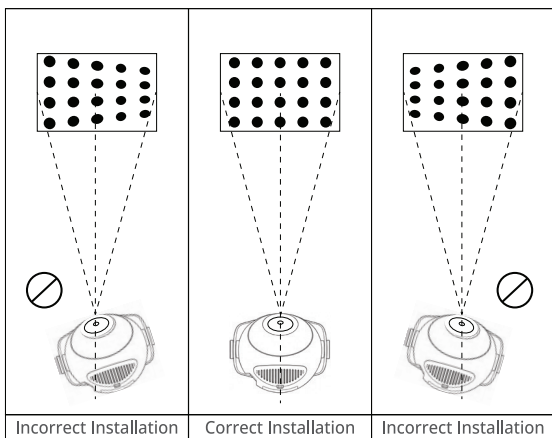

Projection Distance and Size:

- The recommended projection screen size is 101.6-304.8cm. For an improved viewing experience, it is recommended to use the projector in a room that provides as much darkness as possible.

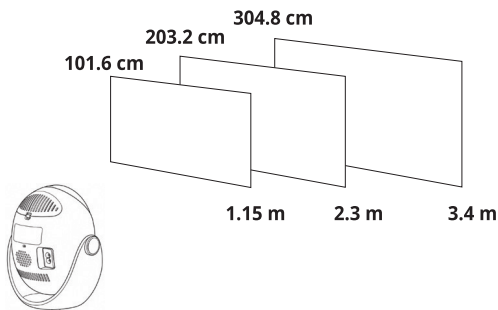


Note: The above mentioned image is for indicative purposes only. While in the actual product, the distance to screen size may vary from the values mentioned above.


Projection Distance & Screen Size

Keystone Adjustment:


1. Go to Settings > Trapezoid Settings.

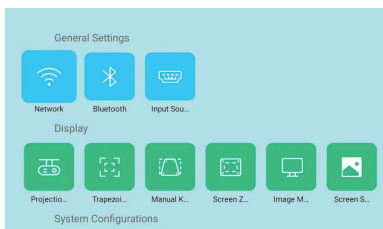

2. Turn on the toggle to enable Auto Keystone.

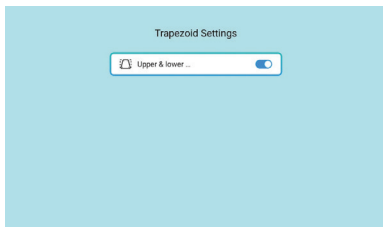


3. Go to Settings > Manual Keystone Correction
4. Use the remote control to select Manual Keystone Correction, then adjust the four corners or sides of the projected image until it is properly aligned.

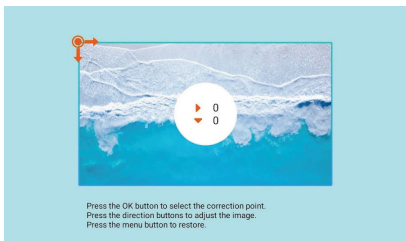

Projection Mode

1. Go to Settings > Projection Mode.
2. Select the projection mode that matches your installation:
 - Desktop Front – Projector placed on a table in front of the screen.


- Desktop Rear – Projector placed behind the screen.
- Ceiling Front – Projector mounted on the ceiling in front of the screen.
- Ceiling Rear – Projector mounted on the ceiling behind the screen.

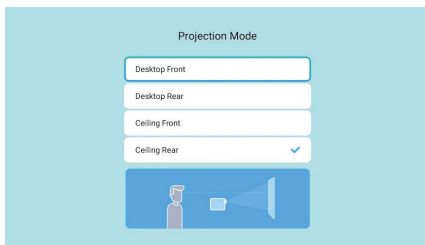

Android Home Screen


The Home Screen provides quick access to:

- Wallpaper
- Source
- Settings
- File Browser
- Applications

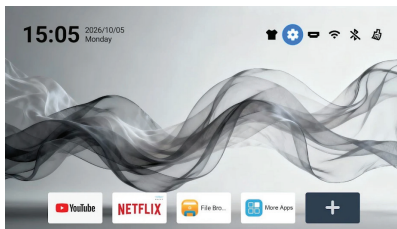

Bluetooth Speaker Mode

1. Go to MyApps > Bluetooth Speaker Mode.
2. The projector's Bluetooth device name will be displayed as **"ZEB-PixaPlay 84"**.
3. Search for this device name on your phone or other Bluetooth device and connect to it.
4. Once connected, audio from the paired device will play through the projector speaker.

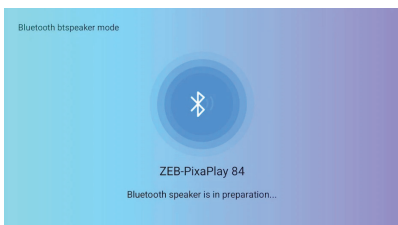


HDMI

1. Connect an HDMI device to the projector using an HDMI cable.
2. Go to Source and select HDMI as the input source.
3. The content from the connected device will be displayed on the projector.

Bluetooth Settings

1. Go to Settings > Bluetooth.
2. Turn Bluetooth On and search for nearby Bluetooth devices.
3. Select the desired Bluetooth device to pair and connect.

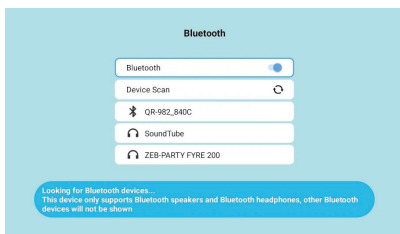


File Manager

Use the File Manager to view and access files stored on external storage devices, such as USB drives.

Network Settings

1. Go to Settings > Network.
2. Select the desired Wi-Fi network from the available list.
3. If the network is password-protected, enter the password to connect.

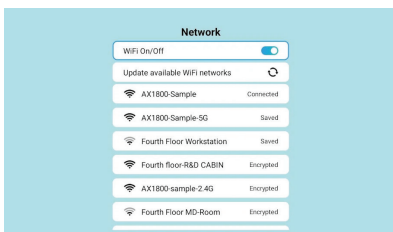

Screen Zoom

1. Go to Settings > Screen Zoom.
2. Adjust the zoom to your preferred level using the remote.

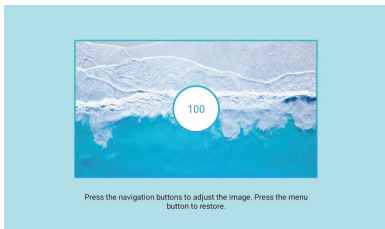


Image Mode:

1. Go to Settings > Image Mode
2. Select your preferred mode from the available options.



Open My Apps:

From the Home Screen, press the Down button to open My Apps