



Smart LED Projector
PixaPlay® 87G



User Manual

www.zebronics.com

Dear Customer,

Thank you for purchasing the **ZEB-Pixaplay 87G Smart LED Projector**. Please read the user manual carefully before usage & save it for future reference.

Note:

- To provide a stable power supply, kindly use the cable provided with the product and connect to a (AC 220–240V) power source.
- Avoid the self-disassembly of the product as it results in voiding the product's warranty.
- Avoid looking directly at the projector lens while it is active.
- Make sure that the projector's air vents are not blocked while in use. The device must be kept in a well-ventilated surrounding for proper functioning.
- It is recommended to power OFF the projector after a continuous usage of 6 hours maximum.
- Place the projector away from water or other liquids. Avoid water accumulation and ensure good ventilation.
- In case of enquiry regarding the projector, email us at enquiry@zebronics.com or contact us at 044 4000 0004.

Features:

- 9000 Lumens
- Google TV
- OTT Apps
- FHD 1080p (Native)
- Upto 381 cm Screen Size
- Auto Focus & Auto Keystone Adaptation
- 30000h Lifelong LED Lamp
- 270° Tilt Mechanism
- Multi Connectivity (BT v5.3 | HDMI (ARC) | USB x 2 | AUX OUT)
- Built-in Speaker
- Dual Band WiFi (2.4GHz & 5GHz)
- BT Remote with Voice Assistant
- Quad Core Processor
- Integrated Stand with Carry Handle
- Miracast
- iOS Screen Mirroring
- APP Support
- Tripod Mount Support

Specifications:


Model	: ZEB-MLP 1
Screen size	: 101.6 - 381 cm
Native Resolution	: 1920 x 1080p
Max. Supported Resolution	: FHD 1080p
Core Processor	: Quad core Processor

RAM	: 1 GB
Storage (ROM)	: 32 GB
Android TV OS Version: 14	
Wi-Fi Connectivity	: Dual Band WiFi (2.4GHz & 5GHz)
Bluetooth Version	: v5.3
Lamp Lifespan	: 30000 h
Brightness	: 9000 Lumens
Contrast Ratio	: 500 : 1
Projection Distance	: 1.1 - 3.3 m
Port Interface	: BT v5.3 HDMI (ARC) USB x 2 AUX OUT
Video file format	: AVI MP4 MKV MOV MPG WMV WebM
Input Voltage	: AC 100-240V, 50/60Hz
Product Dimension	
(W x D x H)	: 20.3 x 18 x 20.5 cm
Net. weight	: 1.4 kg


Package Contents:

Projector	: 1 U
Remote Control	: 1 U
Power Cord	: 1 U
HDMI Cable	: 1 U
QR code Guide	: 1 U
Cleaning Kit	: 1 U

Product Description:

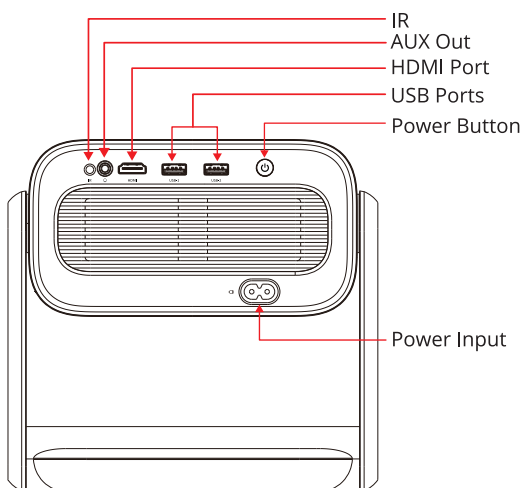


Remote Control:

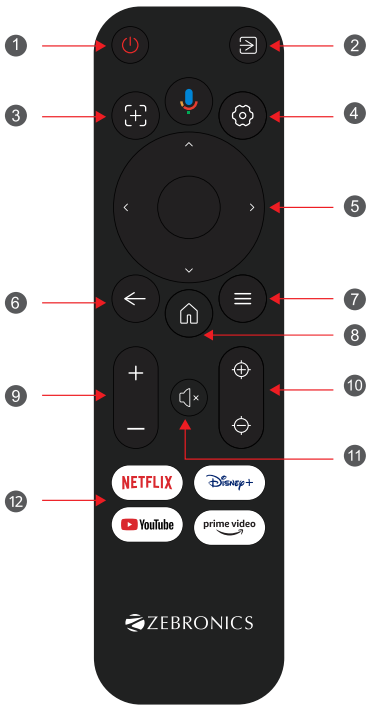

- | | |
|-------------------------|------------------|
| ① Power Button | ⑨ Volume Control |
| ② Source | ⑩ Manual Focus |
| ③ Auto Focus & Keystone | ⑪ Mute |
| ④ Settings | ⑫ Apps |
| ⑤ Navigation | |
| ⑥ Back | |
| ⑦ Menu | |
| ⑧ Home | |


Setting Up the Projector:

- Plug the power cord into the projector's AC power input. Insert the other end of the power cord into a standard wall power socket. Ensure the wall socket is turned on to supply power.
- Please place the projector on a flat surface to ensure proper projection. Now, turn the projector on by pressing the power button either on the panel or on the remote.
- The projector should be aligned straight to the screen/place of projection.

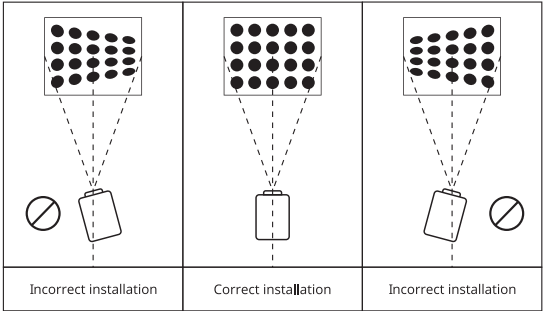

Projection Distance and Size:


- The recommended projection screen size is 101.6–381cm. For an improved viewing experience, it is recommended to use the projector in a room that provides as much darkness as possible.

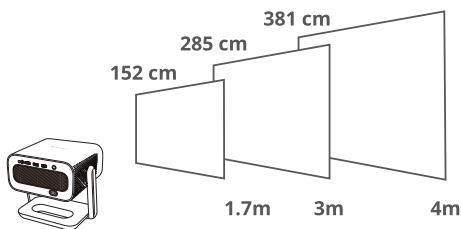

Note: The above mentioned image is for indicative purposes only. While in the actual product, the distance to screen size may vary from the values mentioned above.

Focus & Keystone Adjustment:

- Go to Menu > Display.
- Select Auto Keystone or Auto Focus to automatically adjust the image.
- You can also enable the other features.

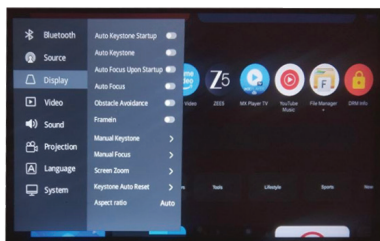


Google Home screen:

- Once the projector is set up, the projector will lead you to the home screen.
- The Home Screen will display Apps, Settings, Screensaver Settings, Play Store, etc.




Settings:

Press the Settings button on the remote control or navigate to the Settings menu on the homepage of the projector. This menu contains submenus for Notification, Wi-Fi Settings, Bluetooth Settings, Screensaver & Accessibility menu

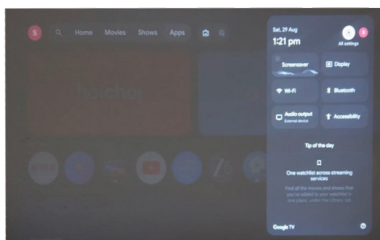

USB Connection:



Plug the USB into the port present at the rear side of the projector. Now navigate to the source tab by clicking the Source button on the remote and select the USB submenu.

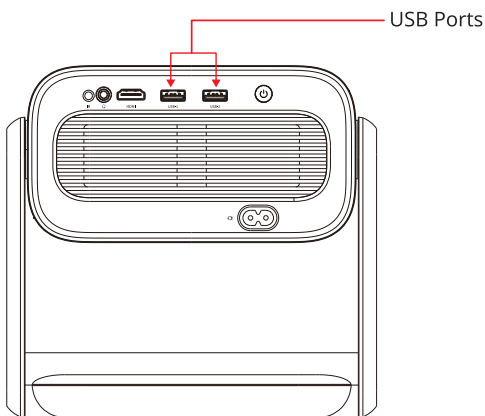

HDMI Connection:

Once the HDMI is connected to the projector, you will need to select the specific signal source as input. After connecting, the content played on the source will be streamed on the projector.



- Go to Menu > Source
- Select the source you want to connect, such as USB or HDMI

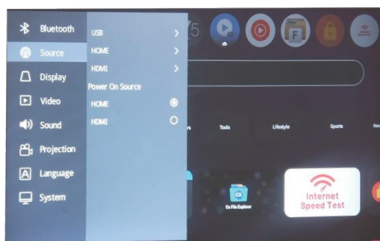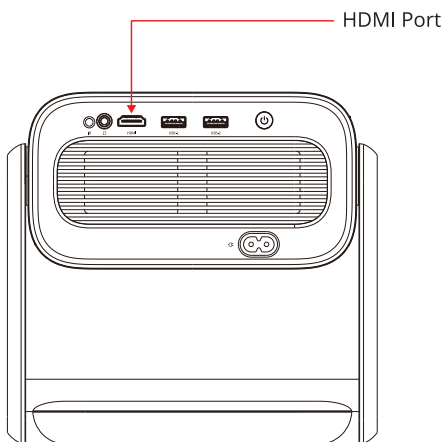

WiFi settings:

1.Go to Settings > WiFi

- Open the Wi-Fi Settings and turn on Wi-Fi. Select the desired Wi-Fi network and connect through authentication.

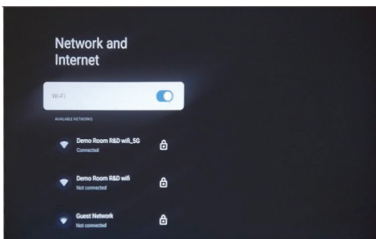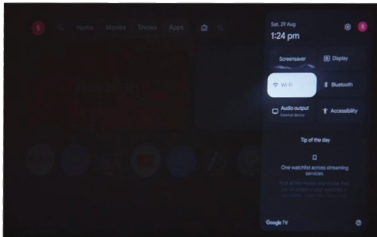

Bluetooth settings:


- Go to Menu > Bluetooth > Bluetooth settings
- The projector provides two Bluetooth modes:

1. Bluetooth Connection settings:

- Connect a Bluetooth speaker, headphone, or other compatible Bluetooth audio device to the projector.

2. Bluetooth Speaker Mode:

- Connect your phone or other compatible Bluetooth device to the projector and use the projector as a Bluetooth speaker.

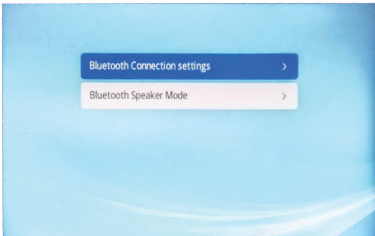

Bluetooth Speaker Mode

- The projector can also work as a Bluetooth speaker, allowing you to play music from a smartphone or other compatible Bluetooth device.
- Go to Menu > Bluetooth Settings > Bluetooth speaker Mode
- The projector's Bluetooth device name will be displayed as **"ZEB-PixaPlay 87G"**.
- Search for this device name on your phone or other Bluetooth device and connect to it.
- Once connected, audio from the paired device will play through the projector speaker.
- You can use the projector's controls to Play/Pause, skip to the Next track, or return to the Previous track.

