



**ZEBRONICS**  
ALWAYS AHEAD

5 . 1 S p e a k e r  
**ZEB****RADIANT**



**User Manual**

[www.zebronics.com](http://www.zebronics.com)

Thank you for purchasing the **ZEB-RADIANT** 5.1 Speaker. Please read the user manual carefully before usage & save it for future reference.

### **Note:**

- Avoid the usage of this speaker at the high temperature and high humidity environment.
- Avoid the self-disassembly of the product as it results in the failure of Warranty.

### **Features**

Wireless BT/USB/SD/FM/AUX/AC-3

LED Display

13.33 cm subwoofer

Remote control

Wall Mountable

### **Specifications**

Output power (RMS)

Subwoofer : 30W

Satellite : 10W x 5

Total : 80W

Driver size

Subwoofer : 13.33 cm x 1

Satellite : 7.62 cm x 5

Impedance

Subwoofer : 8Ω

Satellite : 4Ω

Frequency response : 35Hz-20kHz


S/N Ratio : ≥ 68dB

Separation	: $\geq 45\text{dB}$
File format support (USB/mSD)	: MP3 / WMA
Line input	: 2ch RCA, AC-3
Max. supported memory size	: 32GB (USB/SD)
FM frequency range	: 87.5 MHz - 108 MHz
BT name	: ZEB-RADIANT
BT version	: 4.2 + EDR
Product dimension (W x D x H)	
Subwoofer	: 170 x 351 x 317 mm
Satellite	: 105 x 104 x 172 mm
Net. weight	
Subwoofer	: 4.83 kg
Satellite	: 490g x 5
Total	: 7.28 kg

## Package Content


Subwoofer	: 1 U
Satellite	: 5 U
Remote	: 1 U
QR Code Guide	: 1 U
Input cable (RCA - RCA)	: 2 U
Input cable (RCA - 3.5 mm)	: 1 U

## Control Panel Description

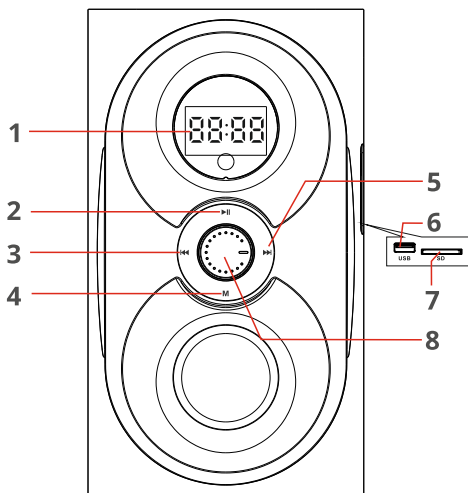


1. LED display
2. Play/Pause
3. Previous track/FM Channel-
4. MODE
5. Next track/FM Channel+
6. USB input
7. SD/MMC Port
8. Volume/Mode adjustment

# Back Panel Description

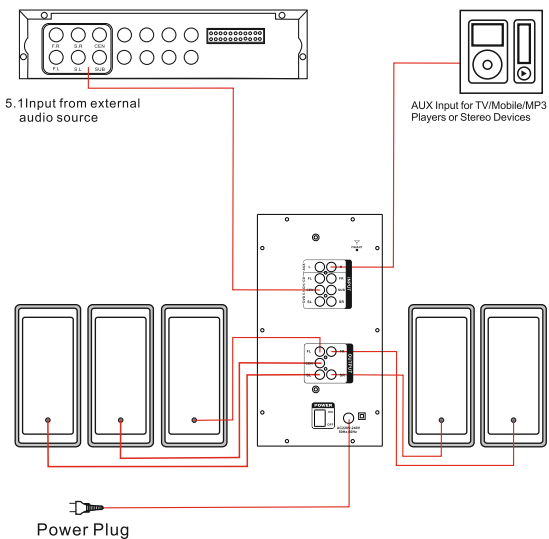

# Remote Control

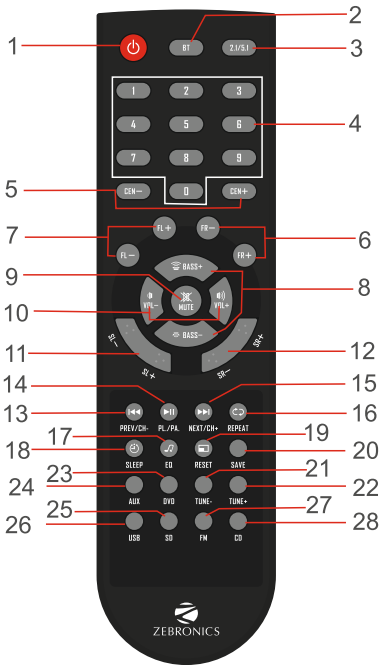

1. **STANDBY:** press this button to turn on/off the woofer.
2. **BT:** BT Input.
3. **2.1/5.1:** 2.1 CH and 5.1 CH output transformation, prologic on when analogue 5.1 input.
4. **0-9:** To choose 0-9 Numerical play
5. **CEN+/-:** Increase or reduce the Center speaker volume
6. **FR+/-:** Increase or reduce the Front Right speaker volume
7. **FL+/-:** Increase or reduce the Front Left speaker volume
8. **BASS+/-:** Increase or reduce the bass level.
9. **MUTE:** To mute the sound.
10. **VOLUME+/-:** Increase volume or reduce the volume.
11. **SL+/-:** Increase or reduce the Rear Left volume.
12. **SR+/-:** Increase or reduce the Rear Right volume.
13. **PREV/CH-:** to select the previous track in BT/ USB/Memory card or to select previous channel in radio station.
14. **PLAY/PAUSE:** to play/pause in BT/USB/Memory card, Long press "PLAY/PAUSE" for 3 seconds to search and save channels automatically in radio.
15. **NEXT/CH+:** to select the next track in BT/ USB/Memory card or to select next channel in radio.
16. **REPEAT:** Repeat an audio track/ all track.
17. **EQ:** To choose audio equalizer presets.
18. **SLEEP:** Sleep timer.
19. **RESET:** Reset to the default mode.
20. **SAVE:** Save the FM after fine tuning of the radio.
21. **TUNE-:** FM tuning decrease.
22. **TUNE+:** FM tuning increase.
23. **DVD:** DVD 5.1 channels audio input mode.
24. **AUX:** AUX audio input mode.
25. **SD/MMC:** SD/MMC mode.
26. **USB:** USB audio input.
27. **FM:** FM mode.
28. **CD:** CD Input.

## **General Instructions**

### **BT Mode:**

Switch the speaker to BT mode, Scan for nearby BT devices in your device. Tap on **“ZEB-RADIANT”** to connect.

### **USB/SD Mode:**

Insert the USB/SD flash drive to the speaker. The speaker will detect the USB/SD and the audio files from flash drive will be played automatically. (This mode isn't selectable on the speaker or remote control unless a USB/SD flash drive is connected).

Ensure that your USB/SD flash drive contains MP3/WAV/WMA files (other file types not supported).

### **FM Radio:**

Switch the speaker to FM mode. In FM mode, press & hold the **“Play / Pause”** button in the remote to scan for the available FM channels. Once the scanning is done, the scanned channels will begin to play. The next button or previous button in the remote can be used to change the FM channels.

### **AUX-IN:**

The speaker can be connected to an audio device using an RCA to 3.5mm cable. Connect the one end of the cable to the speaker and the other end to an audio source.



The songs from the audio source can be heard through the speaker.

**ISO 9001:2015 Certified Company**  
**[www.zebronics.com](http://www.zebronics.com)**

