

ZEBRONICS

Trolley DJ Speaker

ZEB **GINOX**



User Manual

www.zebronics.com

Dear Customer,

Thank you for purchasing **ZEB-Ginox** (*Trolley DJ Speaker*). Please read this user manual carefully before operation & save this user manual for further reference.

Note:

- Avoid the usage of this product at the high temperature and high humidity environment.
- Avoid the self-disassembly of the products or it results in voiding the product's Warranty.
- Charge the speaker with included power adaptor.

To know more about Terms and conditions for warranty policy, please visit

<https://zebronics.com/pages/warranty-policy>

Features:


- BT v5.3 | USB | Micro SD | FM | AUX | MIC IN x 2
- Volume, Bass & Treble Controls
- UHF Wireless Mic
- Karaoke & Recording
- LED Display
- TWS Function
- Built in Rechargeable Battery
- Retractable Handle with Wheels

Specification:

Output Power (RMS)	: 80W
Driver Size	: Full range -30.48cm : Tweeter - 2.54cm
Impedance	: Full range - 3.6Ω : Tweeter - 10Ω
Frequency response	: 40Hz-15kHz
S/N Ratio	: ≥70dB
File format support (USB/mSD)	: MP3, WMA, WAV
Line input	: 3.5mm
Max supported USB/mSD memory size:	32GB
FM frequency range	: 87.5 MHz - 108 MHz
Charging time	: 3.5h
Playback time	: 7h*
BT name	: ZEB-GINOX
BT version	: v5.3
Product Dimension (W x D x H)	: 35 x 30 x 55.5 cm
Net.Weight	: 5.7 kg

* at 50% volume (LED OFF)


Control Description

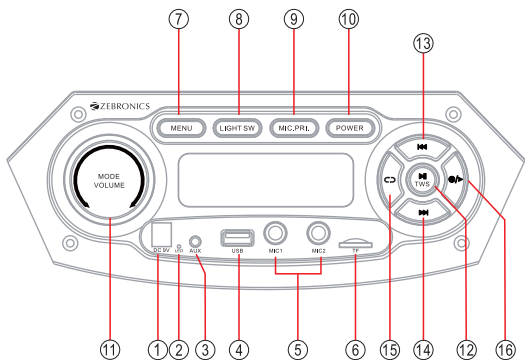

1. 9V DC Input
2. LED Indicator
3. AUX Input
4. USB port
5. Microphone input port 1 and 2
6. mSD slot
7. MENU : Music volume, treble, bass, mic volume & mic echo - once selected rotate the volume knob to adjust desired levels
8. Short press for switching between 8 LED modes & Long press to OFF the LED lights
9. MIC priority On/Off
10. Power On/Off
11. Single press to change the input modes
12. Rotate the knob to adjust the volume and selected menu options

13. Single press to play/pause / scan in FM
& Long press to enable the TWS mode
14. Previous track or channel in FM
15. Next track or channel in FM
16. To switch between available repeat
models (works only under mSD & USB
modes)
17. Record / Play

Remote Control

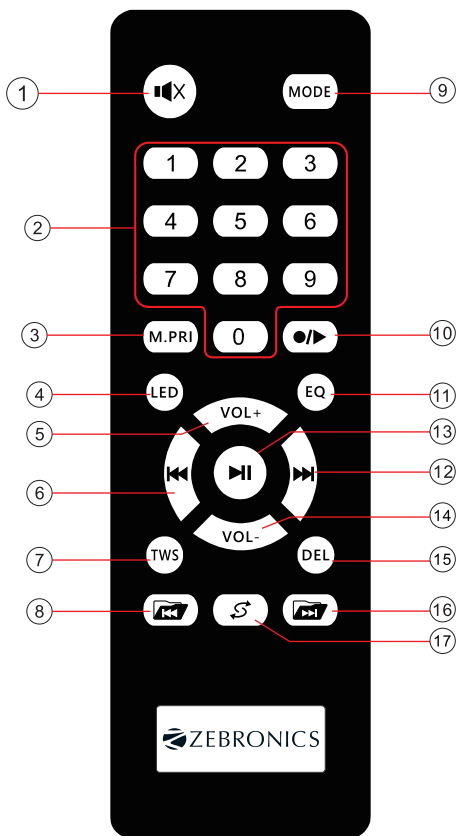

1. Mute / Unmute
2. Numeric pads (0-9)
3. Mic priority
4. LED Lights
5. Volume +
6. Previous track or channel in FM
7. TWS (works under BT mode)
8. Previous folder in USB/mSD modes
9. Input Modes
10. Rec / play
11. EQ presets
12. Next track or channel in FM
13. Play/Pause track
14. Volume -
15. Delete the recorded file
16. Next folder in USB/mSD modes
17. Repeat music (works under USB / mSD modes)

General Instructions

BT Mode:

- Switch the speaker to BT mode, Scan for nearby BT devices.
- Tap on ZEB-GINOX to connect.

USB/mSD Mode:

- Insert the USB Drive/mSD Card to the speaker it will detect the USB Drive/mSD Card and the audio files from drive will be played automatically.

FM Radio:

- Switch the speaker to FM, Now Press the Play/Pause Key to scan the available FM channels.
- Once the scanning is done the speaker will start playing the first scanned channel.

AUX-IN:

- The speaker can be connected to an audio device using a 3.5mm cable.
- Connect the one end of the cable to the speaker & connect the other end of the cable to an audio source.
- The songs from the audio source can be heard through the speaker.

TWS Connectivity:

- Turn on both “ZEB-GINOX” speakers in BT mode.
- Press and hold the Play/Pause button for 3-5 seconds in any one of the speaker to initiate TWS pairing.
- After few seconds both speakers will get connected successfully.
- Now search for nearby BT device in you mobile phone or other source device and tap on BT name **ZEB-GINOX** to connect.

(Note: To exit TWS mode, press and hold the Play/Pause button for 3-5 seconds)

Recording Function:

- To record mic input, first plug-in a USB/mSD card into the speaker, it will act as a storage device.
- Press the REC key on the remote to start/stop recording.
- Once the song or voice is recorded through the Mic, press the REC PLAY key to play the recorded file.

(Note: Speaker can only record the microphone input & the music will be recorded only in AUX mode)

ISO 9001:2015 Certified Company

www.zebronics.com

