



DJ Speaker

ZEB **GLOW 101**



User Manual

www.zebronics.com

Dear Customer,

Thank you for purchasing the **ZEB-GLOW 101 DJ Speaker**. Please read this user manual carefully before operation & save it for future reference.

Note:

- *Avoid the use of this product at high temperature and high humidity environment.*
- *Avoid the self-disassembling of the product or it will result in voiding the Product's warranty.*
- *To know more about Terms and conditions for warranty policy, please visit*

<https://zebronics.com/pages/warranty-policy>

Features:

- BT v5.0 | USB | SD | FM | AUX | MIC IN
- Karaoke Function
- MIC Recording
- LED display
- Remote control
- Dual wireless mic
- Volume & 5 Band EQ controls
- Mic Volume & Echo Controls
- Bass Boost
- TWS Function
- RGB Lights
- 6.3mm Microphone Input
- Remote Control
- Mic Volume & Echo Controls
- Built-in rechargeable battery

Specifications:

BT name	: ZEB-GLOW 101
BT version	: v5.0
Output Power (RMS)	: 80W
Driver Size	
Full range	: 25.4 cm
Tweeter	: 6 cm
Impedance	
Full range	: 2Ω
Tweeter	: Piezo tweeter
Frequency Response	: 50Hz-20kHz
S/N Ratio	: ≥86dB
File format support	
(USB/SD)	: MP3
Line input	: 3.5mm
Max Supported	
USB/SD memory size	: 64GB
FM frequency range	: 87.5 MHz - 108 MHz
Charging time	: 7h
Playback time	: 5h*
Product Dimension	
(W x D x H)	: 26 x 32.5 x 58 cm
Net. Weight	: 10.46kg

**at 50% Volume (LED OFF)*


Package Content:

DJ Speaker	: 1 U
Remote	: 1 U
Wireless Mic	: 2 U

Power Adaptor	: 1 U
Input cable	: 1 U
QR Code Guide	: 1 U

Product Description:

Control Panel Description:

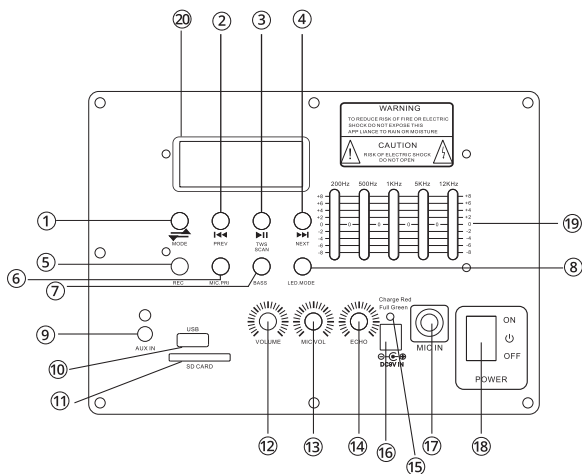

- ① MODE: Switch
- ② PREVIOUS TRACK
- ③ (Play/Pause)/TWS/Scan
- ④ NEXT Track
- ⑤ Recording start
- ⑥ Microphone Priority
- ⑦ BASS Effect
- ⑧ LED MODE,Control
- ⑨ AUX IN.
- ⑩ USB Input Port

- ⑪ SD CARD SLOT
- ⑫ VOLUME.Control Knob
- ⑬ MIC Volume Control Knob
- ⑭ ECHO Control Knob
- ⑮ LED Charge Indicator
- ⑯ DC9V IN
- ⑰ Microphone Input Jack
- ⑱ POWER ON/OFF SWITCH
- ⑲ EQUALIZER
- ⑳ LED Display

REMOTE CONTROL



- Power ON/OFF
- USB/SD/LINE/BLUETOOTH (Audio input)
- Prev/FM CH-
- Play/pause/FM tuner
- Next/FM CH+
- Repeat
- Stop
- Volume up
- Volume down
- Mute
- Wireless disconnect
- 0 1-9 Number Selection Key

General Instructions

BT Connectivity:

- Switch the speaker to BT mode, scan for nearby BT devices in your source device (Mobile/Tablet).
- Tap on 'ZEB-GLOW 101' to connect.

USB/SD Mode:

- Insert the USB/SD card into the speaker.
- The speaker will detect the USB Drive/SD card, and the audio files from the drive will be played automatically.

FM Radio:

- Switch the speaker to FM. In FM mode, long press the Play/Pause key to scan the available FM channels.
- Once the scanning is done, the speaker will start playing the first scanned channel.

AUX-IN:

- The speaker can be connected to an audio device using a 3.5mm cable.
- Connect one end of the cable to the speaker and the other end to an audio source. The songs from the audio source can be heard through the speaker.

TWS Function:

- Turn on both **ZEB-GLOW 101** Speakers in BT mode.
- Press and hold the Play/Pause Button for 3-5 Seconds in any one the speaker to initiate TWS pairing.
- After Few seconds both speakers will get connected Successfully.
- Now Search for nearby BT Devices in your Mobile phone or other source device and tap on BT name **ZEB-GLOW 101** to Connect

*Note: Requires two **ZEB-GLOW 101** speakers for using TWS feature. To unlink them Press and hold the PLAY/PAUSE button for 3-5 seconds on either.*

Recording Function:

- First Plug-in a USB/SD Flash card which will act as a storage device into the slot provided in the speaker.
- Press the REC button on the speaker to Start /Stop the Recording.
- Press the REC PLAY button on the speaker to play the Recorded file.

Charging the speaker:

- Connect the DC 9V ~ 1.5A to charge the speaker.
- RED LED Will be GLOW while Charging.
- Once the speaker is Fully Charged, The GREEN LED Glows