



Portable BT Speaker
MUSIC BOMB 60

User Manual

www.zebronics.com

Dear Customer,

Thank you for purchasing **MUSIC BOMB 60** Portable Bt Speaker. Please read the user manual carefully before usage & save it for future reference.

Note:

- Don't keep the speaker near places which are at high temperature.
- Don't open the speaker in order to avoid electrical shock & other accidents
- Turn off the speaker if the speaker is not being used for a long period of time

Features

BT v5.1

TWS Function

Supports USB & mSD card

Built-in FM Radio

AUX Input

Call Function

Media / Volume control

Built-in Rechargeable battery

7 RGB modes + 1 OFF mode

One sided RGB Fusion & fabric finish

Volume control with RGB level indicator

Specifications

Output Power (RMS) : 24W (12W + 12W)

BT Version : 5.1

Driver Size : 5.7 cm x 2


| | |
|---------------------------|---------------------------|
| Speaker Impedance | : 4Ω |
| Frequency Response | : 80Hz-20kHz |
| S/N Ratio | : ≥80dB |
| Max Supported memory size | : 32GB (USB) |
| Supported Audio formats | : MP3 |
| Charging time | : 3-4h |
| Playback time | : 15h* |
| Product Dimension | : 10 x 22 cm (Dia x H) |
| Net. Weight | : 928g |

Package Contents

| | |
|----------------|-------|
| Speaker | : 1 U |
| Charging Cable | : 1 U |
| Input Cable | : 1 U |
| QR Code Guide | : 1 U |

* at 50% volume (With LED off)

Product Details

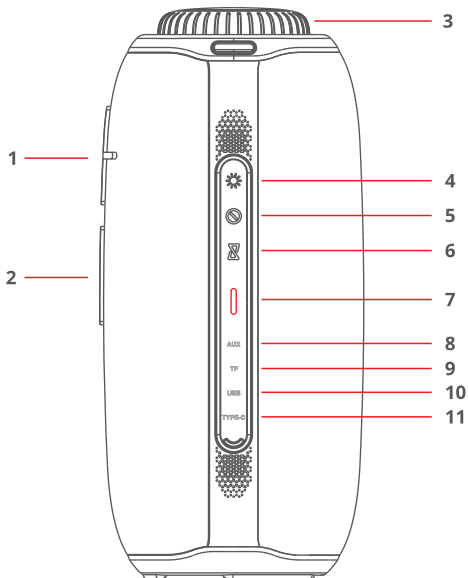

- 1 - NEXT
- 2 - PREVIOUS
- 3 - VOLUME CONTROL KNOB
- 4 - RGB LED MODES BUTTON
- 5 - POWER / MULTIFUNCTION BUTTON
- 6 - TWS BUTTON / MODE BUTTON
- 7 - BATTERY LEVEL INDICATOR
- 8 - AUX IN PORT
- 9 - MICRO SD CARD SLOT
- 10 - USB PORT
- 11 - TYPE-C CHARGING PORT

Button Function:

Bluetooth

- Once the speaker is on, the speaker is in BT mode.
- Now, search for nearby BT device in your mobile and Tap on the BT name **ZEB MUSIC BOMB 60** to connect.
- Press “+” or “-” to control the media
- Short press “ **Play/Pause** ” to play/Pause the music

USB / mSD Mode

- Once the speaker is ON, Insert a USB drive / mSD Card to the speaker
- The speaker will automatically detect the tracks from the USB drive / mSD Card
- Press “+” or “-” to control the media
- Short press “ **Play/Pause** ” to play/Pause the music

AUX-IN

Connect the speaker to an audio source (Phone, TV, PC) using 3.5mm cable. Once connected, audio can be streamed via the speaker from the connected source.

Call Function

- BT should be connected with a mobile phone. During a call, short press the “ **TWS** ” button to answer/end the call or long press the “ **TWS** ” button to reject the call.

- To re-dial a call, double press the " **TWS** " button to dial a call.

TWS Function

- Turn on two **ZEB MUSIC BOMB 60** speakers you want to pair
- Short press the " **TWS** " button on any one speaker to activate TWS mode.
- After Few seconds, both the speakers will be connected successfully.
- Now, search for nearby BT device in your mobile and Tap on the BT name **ZEB MUSIC BOMB 60** to connect.

Note: Requires two speakers for TWS feature.

LED Modes

1. Short press the RGB LED button to change the LED modes
2. Press & hold down the RGB LED button to turn it OFF / ON.

Note: Once the input source is connected, the modes will automatically be chosen. If you need to access a specific mode while multiple input sources are connected, hold down the TWS button for a few seconds to switch between devices.

Charging instruction

1. Connect the Type-C charging cable to the DC 5V charging port of the speaker and insert the other end into a USB power adaptor with

minimum DC 5V 1A power rating.

2. Battery level indicator LED blinks in a row, indicating that the battery is being charged. The LED will glow in a row once it is fully charged.

ISO 9001:2015 Certified Company

www.zebronics.com

