



Portable BT Speaker
ZEB **ASTRA40**

Portable BT Speaker
ZEB **ASTRA40**



User Manual

www.zebronics.com

Thank you for purchasing **ZEB-ASTRA 40** Speaker. Please read this user manual carefully and keep it for future reference.

Note:

- Avoid the usage of this product at the high temperature and high humidity environment.
- Avoid the self-disassembly of the products or it results in the voiding the product's Warranty.
- Turn off the speaker when the speaker is not in use.
- To know more about Terms and conditions for warranty policy, please visit:

<https://zebronics.com/pages/warranty-policy>

Features:

BT v5.3 | USB | mSD | FM | AUX

TWS Function

Call Function

Media / Volume control

Built-in Rechargeable battery

Dual Passive Radiators

Matte Finish

RGB LED modes

Specifications:

Model No	: ZEB-PSPK 44
Output Power (RMS)	: 20W (10W + 10W)
BT Version	: 5.3
Driver Size	: 52mm x 2
Speaker Impedance	: 3Ω
Frequency Response	: 100Hz-20kHz
S/N Ratio	: ≥75dB
Separation	: ≥45dB
Max Supported USB/mSD memory size	: 32GB
Supported Audio formats	: MP2, MP3, WMA, APE, FLAC,...
Charging time	: 8.5h
Playback time	: 22h*
Product Dimensions (W x D x H)	: 37.3 x 6.5 x 6.5 cm
Net. Weight	: 622g

Package Contents :

Speaker	: 1 U
Charging cable	: 1 U
Input cable	: 1 U
QR Code Guide	: 1 U

** at 50% volume(LED off)*


Control panel image:



Buttons:

1. "M" Button:- Single press:- switching modes.
*Long press this button to change LED , colors
 2. "+"Button: - Long press for next track / Single press for volume up
 3. "-" Button: - Long press for previous track / Single press for volume down
- "▶||" Button: - Single press for play and pause in USB, BT & mSD or scan in FM mode/ Long press for TWS function.

Rear Panel functions

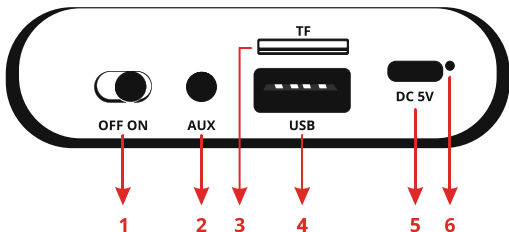

1. Power On/Off switch
2. Aux input
3. mSD input
4. USB input
5. Charging input
6. Charging indicator

General Instructions

Charging Instructions

- Connect the one end of the power cable to speaker and connect the other end to a rated DC 5V adapter.
- The Speaker has constant Red led indication when the speaker is charging. The Indicator turns off when the speaker is completely charged.

BT Mode

- Turn ON the speaker, press "Mode" button to switch to BT Mode. Switch ON BT on your

phone or tablet and search for nearby BT devices,

- Search for the BT name "ZEB-ASTRA 40" and tap to connect it.
- >Short Press the + to increase the volume and long press the + button to switch to next track.
- >Short Press the - to decrease the volume and long press the - button to switch to previous track.

TWS Function

- Turn on two ZEB-ASTRA 40 speakers.
- Long press on the II button for few seconds on any one speaker to activate TWS function.
- After Few seconds, you'll hear TWS connected notification from the speakers when they are connected successfully.
- Now, search for nearby BT device in your mobile and Tap on the BT name ZEB-ASTRA 40 to pair the speaker

***Note:** Requires two Zebronics ASTRA 40 speakers for TWS feature.*

AUX-IN

- The speaker can be connected to an audio source using a 3.5mm to 3.5mm cable.
- Connect the one end of the 3.5mm

connector to the speaker and the other end of the cable to an audio source. The speaker automatically detects.

USB

- The speaker automatically switches to USB input mode when a USB flash drive is inserted into the speaker.
- The songs from the USB audio source can be heard through the speaker (this mode isn't selectable on the speaker unless a USB flash drive is connected).

FM Mode

- Press the M button to select FM mode. Short press ►|| button to initiate FM Scanning process. Once the scanning process is done, the Speaker automatically plays the First channel of the FM
- Call Function
- > Single press the ►|| button to answer/ end the Call
- >Double press the ►|| button to redial