




NEB Portable BT Speaker

**AXON 500**

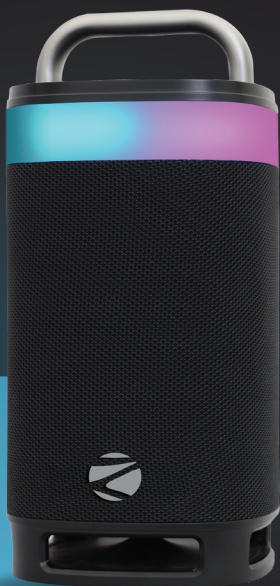

**User Manual**

[www.zebronics.com](http://www.zebronics.com)

Thank you for purchasing the **ZEB-AXON 500** Portable BT Speaker. Please read the user manual carefully before usage & save it for future reference.

**Note:**

- Avoid the usage of this product at high-temperature and high-humidity environments.
- Avoid the self-disassembling of the product or it will result in voiding the Product's warranty.

**Caution:** There is a risk of explosion if the product is disposed in the fire.

To know more about Terms and conditions for warranty policy, please visit

<https://zebronics.com/pages/warranty-policy>

**Features:**

- 100W RMS Output
- Upto 6h\* Backup
- Speaker with 8 Drivers
- Built-in 5000mAh Rechargeable battery
- Deep Bass
- Passive Radiator
- IPX5 Water-Resistance
- 3 EQ Modes
- TWS Function
- BT v5.3 | AUX | USB
- RGB LED Lights
- Built-in-Powerbank



- Carry Handle
- Fabric Finish
- Media / Volume Control

## Specifications:

- Output Power (RMS) : 100W
- BT Version : v5.3
- Driver Size
  - Driver : 6.9 cm x 4
  - Tweeter : 3.81cm x 4
- Speaker Impedance
  - Speaker Drive : 2Ω
  - Tweeter : 10Ω
- Frequency Response : 50Hz-20kHz
- S/N Ratio : ≥80DB
- Max Supported
  - USB memory size : 64GB
- Supported Audio formats : MP3
- Charging time : 5h
- Playback time : 6h\*
- Product Dimension
  - (WxD xH) : 17 x17 x36 cm
- Package Dimension
  - (WxD xH) : 22 x22 x41.3cm
- Net. Weight : 4.17 Kg

*\* at 70% volume (LED off) - Default EQ*

## Package Content:

- Speaker : 1 U
- Charging cable : 1 U
- Input cable : 1 U
- QR Code Guide : 1 U

## Button Description:



1. Volume Decrease
2. LED RGB Control
3. EQ Control
4. TWS Pairing Button
5. Volume Increase
6. Power ON/OFF Button
7. Play/Pause Button
8. Mode Switch (BT | USB | Type-C)

## Port Description:



1. Type-C Charging Input
2. USB Drive Input
3. AUX Input
4. RESET

## General Instruction

### BUTTON FUNCTION:

1. Turn the speaker ON/OFF using the Power Button
2. Use Volume (+) button to increase and Volume (-) button to decrease the volume of the speaker
3. Press the Equalizer button to toggle between the 3 EQ Modes of the speaker.

4. Press Play/Pause button to play track or pause track being played.
5. Long Press the Volume (+) button for Next Track.
6. Long Press the Volume (-) button for Previous Track.
7. Press Mode Button to switch between BT | USB | AUX mode.
8. Long Press the TWS Pairing Button on both the speakers for connecting them together.
9. Press the RGB LED button to change the modes of the RGB lighting of the speaker.

### **BT Mode:**

Switch on the speaker to BT mode, Scan for nearby BT devices in your device. Tap on **"ZEB-AXON 500 "** to connect.

### **USB Mode:**

Insert the USB Drive to the USB port, the speaker will detect the USB Drive and the audio file will be played automatically.

**AUX-IN:**

The speaker can be connected to an audio device using a 3.5mm cable. Connect the one end of the cable to the speaker & connect the other end of the cable to an audio source. The tracks from the audio source can be heard through the speaker.

**Charging Instruction:**

Connect the charging cable to a DC5V/3A adaptor and connect the other end to the speaker.while charging a Red LED will glow and the LED goes OFF once the speaker is fully charged.