



**ZEBRONICS**  
ALWAYS AHEAD

Portable BT Speaker  
**BARREL200**



**User Manual**

[www.zebronics.com](http://www.zebronics.com)

## **Dear Consumer,**

Thank you for purchasing **ZEB-BARREL 200** Portable Speaker. Please read the user manual carefully before usage & save it for future reference.

### **Note:**

- Avoid the usage of this product at the high temperature and high humidity environment.
- Avoid the self-disassembly of the products or it results in the voiding the product's Warranty.
- Turn off the speaker when the speaker is not in use.
- To know more about Terms and conditions for warranty policy, please visit

<https://zebronics.com/pages/warranty-policy>

### **Features:**

Wireless BT

Supports USB & mSD

Built-in FM Radio

AUX Input

TWS Function

6.3mm Microphone input

Media / Volume control

Built-in Rechargeable battery

## **Specifications :**


Output Power (RMS)	: 20W + 20W
BT Version	: v5.0
Driver Size	: 16.51cm x 2
Speaker Impedance	: 4Ω
Frequency Response	: 100Hz-20kHz
S/N Ratio	: ≥80dB
Max. Supported USB / mSD memory size	: 32GB
Supported Audio formats	: Mp3
Charging time	: 4h
Playback time	: 10h*
Product Dimension (W x D x H)	: 21 x 21 x 51 cm
Net. Weight	: 2.8kg

*\*at 50% volume (LED OFF)*

## **Package contents :**

Speaker	: 1 U
Wired Mic	: 1 U
Charging cable	: 1 U
AUX cable	: 1 U
QR Code Guide	: 1 U

## Buttons & Ports Description

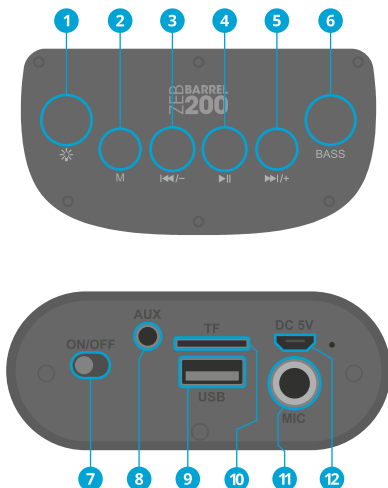

- |                        |                  |               |
|------------------------|------------------|---------------|
| 1 RGB Light Button     | 5 Next/Volume Up | 9 USB         |
| 2 Mode                 | 6 Bass Button    | 10 Micro SD   |
| 3 Previous/Volume Down | 7 Power On/Off   | 11 Mic in     |
| 4 Play/Pause           | 8 AUX in         | 12 DC in (5V) |

### RGB Function :

RGB Modes can be controlled by using the RGB Light button. (4 RGB Modes + 1 OFF Mode)

## **Button Function :**

### **Power On/off**

Use the Power ON/OFF slider switch to turn On/Off the speaker.

### **BT Mode :**

- Once the speaker is on, Please make sure that the speaker is in BT mode.
- Now, search for nearby BT device in your mobile and Tap on the BT name ZEB-BARREL 200 to connect.
- Short-press "+" or "-" to control the media.
- Long-press "+" or "-" to adjust the volume.
- Short press "Play/Pause" to Play/Pause the music.

### **USB / Micro SD card Mode :**

- Once the speaker is ON, Insert a USB pen drive / Micro SD card to the respective port of the speaker.
- The speaker will automatically detect the songs from the USB drive / Micro SD card and play.
- Short-press "+" or "-" to control the media
- Long-press "+" or "-" to adjust the volume
- Short press "Play/Pause" to Play/Pause the music

## **FM Radio :**

- Once the speaker is turned ON, Please switch the speaker to FM mode using the Mode button.
- Press the "Play/Pause" key to auto scan the available FM channels.
- Short-press "+" or "-" to change the scanned FM channels
- Long-press "+" or "-" to adjust the volume.

**Note :** Please use Aux cable as antenna for better FM signal reception.

## **TWS Function :**

- Turn on two ZEB-BARREL 200 speakers you want to pair.
- Long press the "M" button on any one speaker to activate TWS mode.
- After Few seconds, both the speakers will be connected successfully.
- Now, search for nearby BT device in your mobile and Tap on the BT name ZEB-BARREL 200 to connect.
- To exit TWS mode, long Press "M" button again.

**Note:** Users need to make TWS connection first, then make Bluetooth connection with the mobile phone.

**AUX-IN :**

Switch the speaker to AUX Mode, Connect one end of the AUX Cable to the speaker & connect the other end to an audio source. The songs played from the audio source can be heard through the speaker.

**Charging instruction :**

Connect the micro USB to the speaker & connect the other end of the cable to a DC 5V adapter.

