



Portable BT Speaker

**ZEB****BUDDY**  
**ZEB****500**



**User Manual**

[www.zebronics.com](http://www.zebronics.com)

## **Dear Customer,**

Thank you for purchasing **ZEB-BUDDY 500** Portable BT Speaker. Please read the user manual carefully before usage & save it for future reference.

### **Note:**

- Avoid the usage of this product at the high temperature and high humidity environment.
- Avoid the self-disassemble of the product as it results in the failure of Warranty.
- Turn off the speaker if the speaker is not being used for a long period of time.
- Please charge the product with power adapter output rated voltage DC 5V.

### **Features**

Wireless BT

Supports USB & mSD

Built-in FM Radio

AUX Input

TWS Function

6.3mm Microphone input

Media / Volume control

Built-in Rechargeable battery

Wired MIC

RGB Lights with control Switch

## Specifications


Output Power (RMS)	: 25W
BT Version	: v5.0
Driver Size	: 20.32 cm + (6.2 x 7) cm
Speaker Impedance	: 2.2Ω + 10Ω
Frequency Response	: 100Hz-20kHz
S/N Ratio	: ≥ 80dB
Max Supported USB/mSD memory size	: 32GB
FM Frequency range Supported	: 87.5 MHz - 108 MHz
Audio formats	: Mp3
Charging time	: 4.5H
Playback time	: 5H*
Product Dimension (W x D x H)	: 275 x 235 x 360 mm
Net. Weight	: 2.9kg

## Package Contents:

Speaker	: 1 unit
Wired Mic	: 1 unit
Charging Cable	: 1 unit
AUX cable	: 1 unit

\* at 50% volume (with LED off)

## Buttons Description

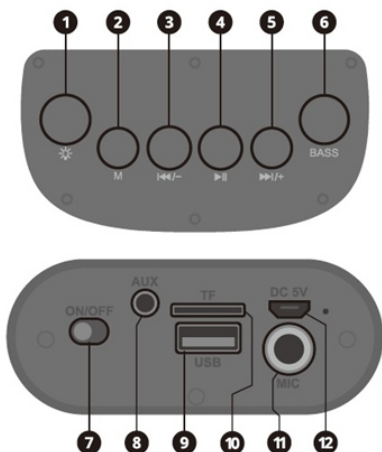

1 - RGB Light Button

2 - Mode Button

3 - Previous/Volume Down

4 - Play/Pause

5 - Next/Volume Up

6 - Bass Button

7 - Power On/Off

8 - AUX In

9 - USB

10 - Micro SD

11 - Mic In

12 - DC In (5V)

### Instruction for Use:

#### Button Function:

1. Turn the speaker ON/OFF using the power switch.
2. Press mode button to change it to BT / USB / mSD / AUX mode.
3. Press & hold **▶▶+** / **◀◀-** to increase / decrease the volume.

4. Press **▶▶+** / **◀◀-** once to play Next/Prev.
5. Press **⏮** to Play/Pause.
6. Press **💡** to change the RGB patterns.

### **Pairing with the Bluetooth speaker:**

1. Power ON the Speaker and you will hear the indication tone for the BT mode.
2. Turn ON BT on your phone or tablet and search for the nearby BT compatible devices.
3. Search for the BT name **"ZEB-BUDDY 500"** and tap to connect it.

### **Micro SD / USB Mode:**

Once the mSD / USB drive is plugged into **ZEB-BUDDY 500** It'll detect automatically and start playing the music.

### **FM Radio:**

Press Mode to switch the speaker from Bluetooth to FM.

Press Play-Pause button once to auto scan the available FM channels.

Use Prev/Next button to change the FM channels.

### **TWS Function:**

- Switch ON two **"ZEB-BUDDY 500"** speakers you want to pair.
- Press & hold the Mode button for 5 seconds in any one speaker to activate TWS mode.

- After few seconds, both the speakers will be connected successfully.
- Now, search for nearby BT device in your mobile and Tap on the BT name "**ZEB-BUDDY 500**" to connect.
- To exit TWS mode, Press & hold mode button for 5 seconds in any one speaker to exit from TWS mode.

### **Charging the Speaker:**

1. Connect the charging cable to DC-5V port of the speaker and insert the other end into a DC 5V charging power source/adaptor.
2. Red LED glows indicating that the battery is being charged.
3. Red LED goes OFF after speaker gets fully charged.

