



Tower Speaker
LEGENDMax
ZEB



User Manual

www.zebronics.com

Thank you for purchasing **ZEB-LEGEND MAX** Tower Speaker. Please read the user manual carefully before usage & save it for future reference.

Note:

- *Avoid the usage of this product at the high temperature and high humidity environment.*
- *Avoid the self-disassembly of the product or it results in the failure of Warranty.*
- *Turn off the speaker when the speaker is not in use.*

To know more about Terms and conditions for warranty policy, please visit:

<https://zebronics.com/pages/warranty-policy>

Features

BT v5.1 / USB / FM / AUX / MIC Input

LED Display

16.51 cm Subwoofer

Remote Control

Karaoke

6.3mm Microphone Input

Integrated Media Control

Specification

Output Power (RMS) : 100W

Driver Size

Subwoofer : 16.51 cm

Mid Range : 10.16 cm x 2


Impedance	
Subwoofer	: 8Ω
Mid Range	: 4Ω
Frequency Response	: 20Hz-20khz
S/N Ratio	: ≥70dB
Separation	: ≥ 45dB
File Format Support	: MP3 (USB)
Line Input	: 2ch RCA
Max. Supported USB	
Memory Size	: 32GB
FM Frequency	
Scan Range	: 88MHz - 108MHz
BT Name	: ZEB-Legend Max
BT version	: 5.1
Product dimension	: 19.8 x 24.7 x 73.4 cm (W x D x H)
Net. Weight	: 8.04Kg

Package content

Speaker	: 1 U
Remote	: 1 U
Input Cable	: 1 U
Wired Microphone	: 1 U
QR Code Guide	: 1 U


Product Description:

Control Panel

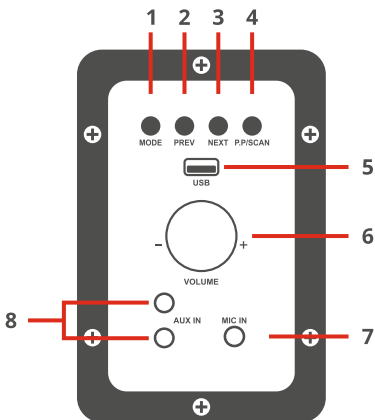


1. Mode Button
2. Previous Button
3. Next Button
4. Play - Pause / Scan Button
5. USB Port
6. Volume Increase / Decrease Knob
7. Mic IN
8. AUX IN

Back Panel

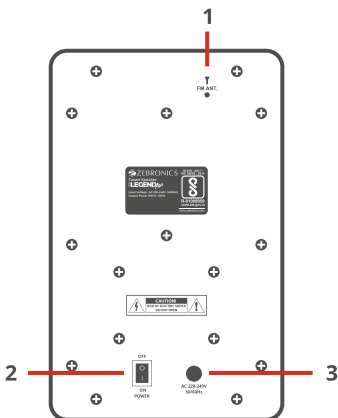

1. FM Antenna
2. Power On / Off Switch
3. AC Input

Remote Control

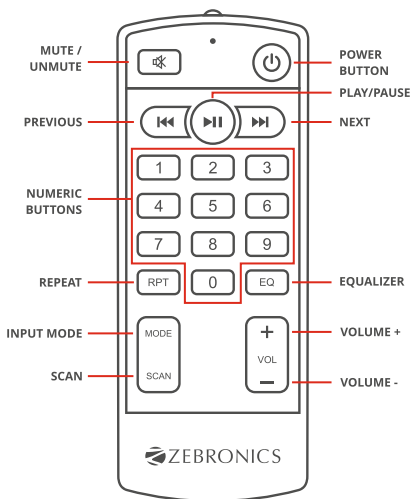

Power : Standby ON/OFF

Numeric Pad (0-9) : To select particular track from USB drive directly or to enter FM Channel frequency directly

Vol+ : To increase the volume

Prev : To select the previous tracks in BT/USB or to Tune in FM mode

Vol- : To decrease the volume

RPT : To Switch between available repeat modes

Scan : To scan all FM channels available

Mode : Mode Selection (BT/AUX/USB/FM)

EQ : Short press to control BASS and short Press again to control TREBLE. Long Press to use Equalizer

Play/Pause : To Play / Pause the current track. To switch next channel in FM mode

Next : To select the next tracks in BT/USB or to Tune in FM mode

Mute : To Mute / Unmute

Instructions for Use:

Button functions

- Short Press the “**Mode**” button to change the input mode (BT/AUX/USB/FM).
- Short press the “**Next**” button to Next track / Station in BT/USB/FM mode.
- Short press the “**Prev**” button to Previous track / Station in BT/USB/FM mode.
- Short press the “**Play/Pause**” button to Play / Pause / Mute the track in (BT, USB, FM).
- Long press the “**Scan**” button to auto scan the nearby available FM channels.

General Instructions:

BT Mode:

Power ON the speaker, press “**Mode**” button to switch to BT Mode. Switch ON BT on your audio source device and search for nearby BT devices, Find the name “**ZEB - Legend Max**” tap on it and select pair. Media controls are mentioned in the above button functions.

USB Mode:

The speaker automatically switches to USB mode when a USB drive is inserted. Media controls are mentioned in the above button function.

FM Radio:

Long press the **Play/Pause** button on the

control panel or **Scan** button on the remote to initiate auto scan function. Once the scanning is done, the detected channels will begin to play. Use **Previous/Next** button on the control panel or remote to change the channels.

AUX-IN:

The speaker can be connected to any external audio player using the provided RCA to 3.5mm cable. Connect the red & white RCA cable to the speaker's AUX input and connect the other end to any audio source with 3.5mm AUX output.

Instructions for Mic Settings:

Single press the EQ button on the remote to control the Mic settings.

The following will appear on the LED display.

Bass	tr - Treble
Ldof/Ldon	EH - Mic Echo
nC - Mic Volume	nS - Mic Priority

Now press **"Vol+"** or **"Vol-"** button on remote control to increase / decrease the values.

