



Projector  
HiFi Pixa  
NPlay 23



## User Manual

[www.zebronics.com](http://www.zebronics.com)

Dear Customer,

Thank you for purchasing the **ZEB-Pixaplay 23 Projector**. Please read the user manual carefully before usage & save it for future reference.

**Note:**

- *To provide a stable power supply, kindly use the cable provided with the product and connect to a AC 100-240V, 50/60Hz power source.*
- *Avoid the self-disassembly of the product as it results in voiding the product's warranty.*
- *Avoid looking directly at the projector lens while it is active.*
- *Make sure that the projector's air vents are not blocked while in use. The device must be kept in a well ventilated surrounding for proper functioning.*
- *It is recommended to power OFF the projector after a continuous usage of 6 hours maximum.*
- *Place the projector away from water or other liquids. Avoid water accumulation and ensure good ventilation.*
- *In case of enquiry regarding the projector, email us at [enquiry@zebronics.com](mailto:enquiry@zebronics.com) or contact us at 044 4000 0004.*

## Features :

- Multi Connectivity (BT v5.0 | HDMI x 2  
USB x 2 | AUX OUT)
- Home Theatre Projectors for Movies, TV &  
Gaming, etc.
- Powerful Speaker
- Wide Compatibility
- Ceiling Mountable
- Remote Control
- Electronics Focus (via remote)
- Auto Focus Technology
- Quad Core Processor
- Auto Keystone Adaptation
- Miracast
- Dual band Connectivity (2.4GHz & 5GHz)
- FHD 1080p (Native)
- 30,000h lifelong LED lamp

## Specification:



Screen size	: 114 - 508cm
Native Resolution	: 1920 x 1080 FHD
Max. Supported Resolution	: 1080p (max)
RAM	: 1 GB
Core Processor	: Quad Core Processor
Storage (ROM)	: 8 GB
WI-Fi Connectivity	: Dual band Connectivity (2.4GHz & 5GHz)
Bluetooth Version	: v5.0
Display Technology	: LCD
Lifespan	: 30,000h

Brightness	: 9000 lumens
Contrast ratio	: 5000:1
Projection Distance	: 1.3m - 5.3 m
Port Interface	: AUX OUT, USB x 2, HDMI x 2
Video file format	: MP4, M4V, MPEG2, MKV, AVI, FLV, MOV
Input Voltage	: AC 100-240V, 50/60Hz
Product Dimension (W x D x H)	: 33 x 24 x 11 cm
Net. weight	: 2.8Kg


### **Package Contents:**

Projector	: 1 U
Remote Control	: 1 U
Power Cord	: 1 U
Cotton Swab Pack	: 1 U
HDMI Cable	: 1 U
QR Code Guide	: 1 U

## Product Description

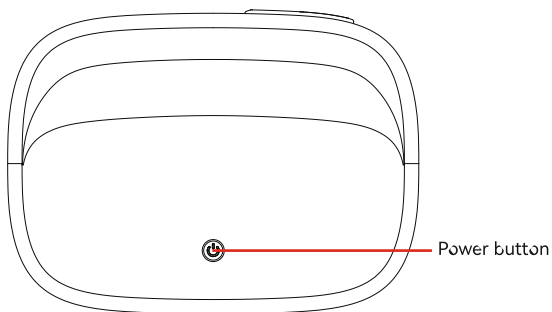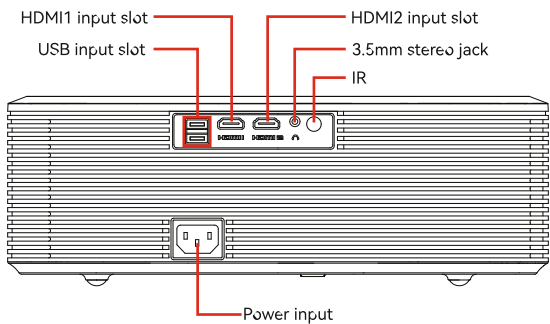


## Remote Control

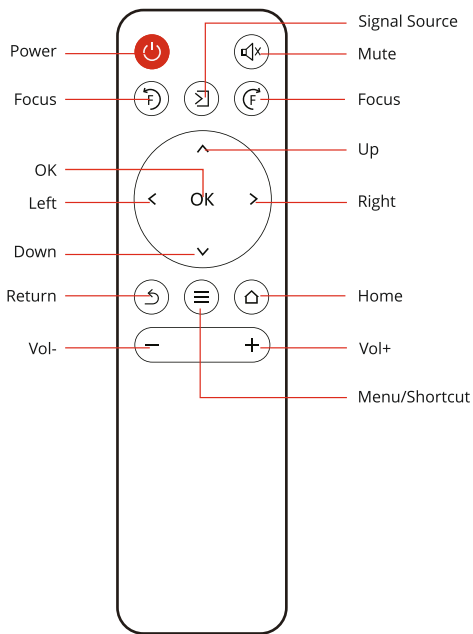

### **NOTE:**

1. To avoid power shortage, do not mix and use the old and new batteries.
2. To avoid battery leakage corrosion, if the remote controller is not used for a long time, please take the battery out.

# Projector Interface

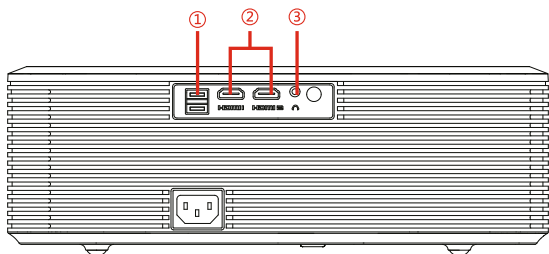

1



2




3



## Setting Up the Projector

1. Before turning ON, make sure to place it in a flat surface for a proper projection then press the power button / turn it on by using the remote.
2. Connect the power cord to the socket of the projector and turn it ON.
3. Align the projector as shown in the image below to ensure proper projection.

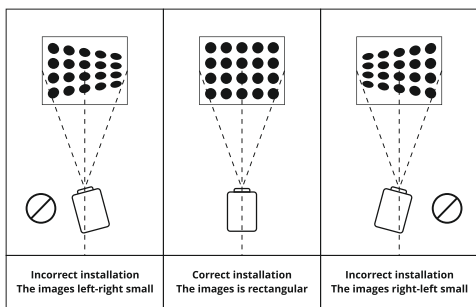

### Focus and Keystone Adjustment:

*Note: There is no manual focus, it has only electronics focus. Do not rotate the lens or it will get damaged.*




Once the projector turns ON, wait till it gets loaded. Only after boot-up you'll be able to adjust the focus using the focus control buttons of the remote as mentioned in the image.




# Electronics Focus





# Auto Focus

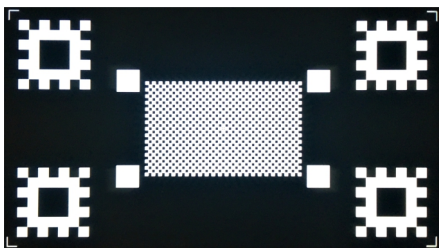


# Manual Keystone

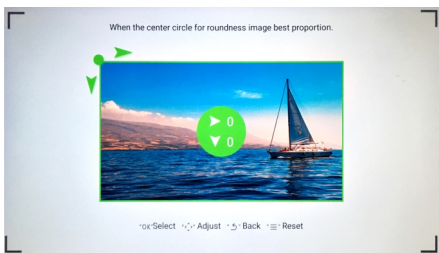

## Miracast Connection

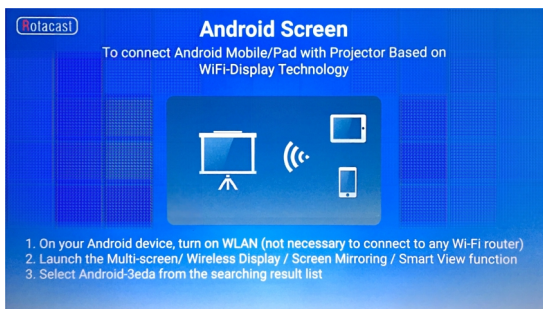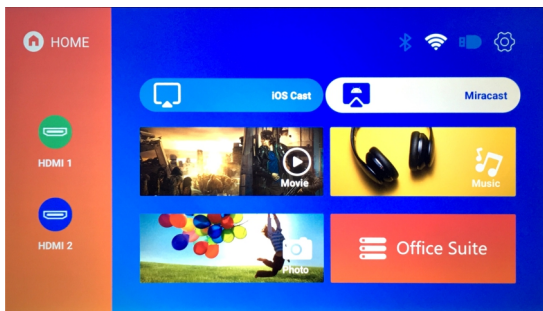


## IOS Screen Mirroring

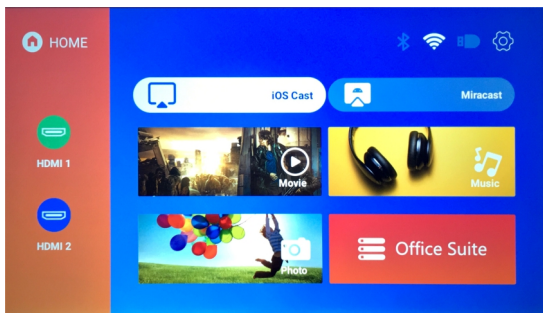

**Polacast** ⚙️

Make sure that your iOS device is connected to the same network as your projector

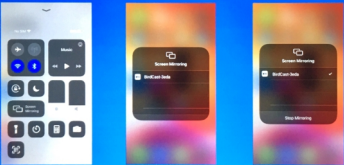


1. On your iOS device, open Control Center and tap Screen Mirroring.
2. Looking for devices that can be mirrored on.
3. Select BirdCast-3eda from the list.

📶 "Demo-Room5GHZ"    📺 BirdCast-3eda

## HDMI Interface

Once the HDMI interface is connected to the projector, you will need to select the specific signal source as the input. After connecting the content played on the source will be streamed on the projector.

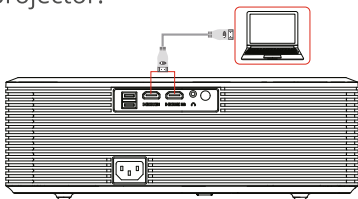




**HOME** 📶 🔊 ⚙️

**IOS Cast**    **Miracast**

**HDMI 1**    **HD1**    **HD2**    **Music**

**HDMI 2**    **Photo**    **Office Suite**

# USB Interface

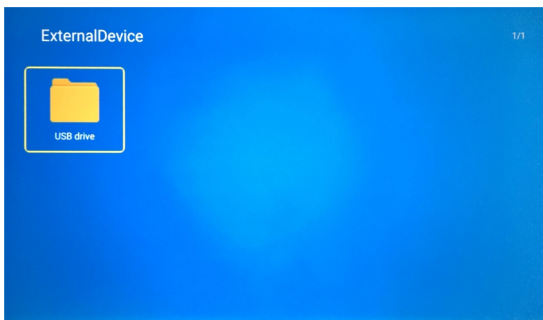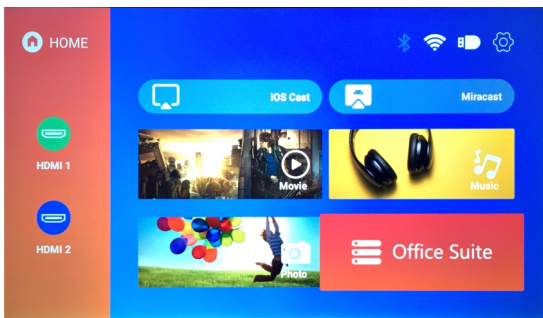
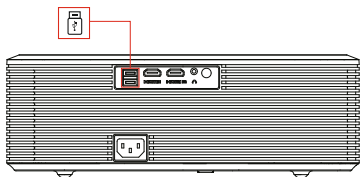


# Projection Settings

The projection adjustments like Keystone adjustment, zoom out can be done using the projection tabs in the settings.


**Digital Zoom:** with a click of remote, you can scale down the image to perfectly fit within the screen frame.

**Manual Keystone:** While most of the projector comes with only manual vertical trapezoidal correction, resulting in blurred corners, **ZEB-Pixaplay 23** has 4D keystone corrections, giving you sharp and clear corners.

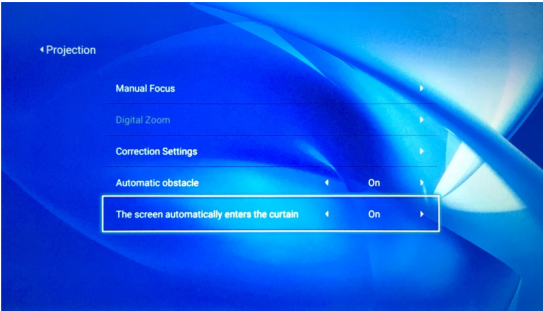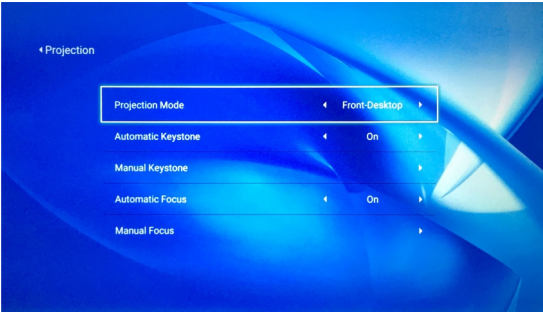


## Settings

Open the homepage and select Settings. This setting houses the following sub-menus: WiFi Setting, Bluetooth setting, Projection settings, System Update, Other Settings and About.

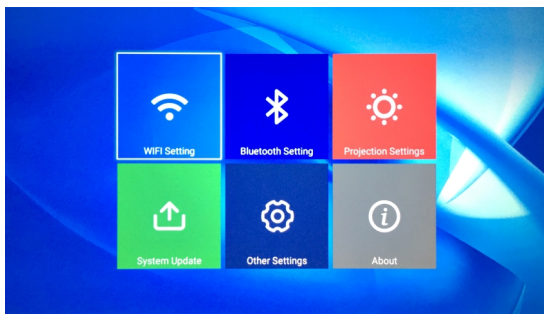

## Projector distance & size

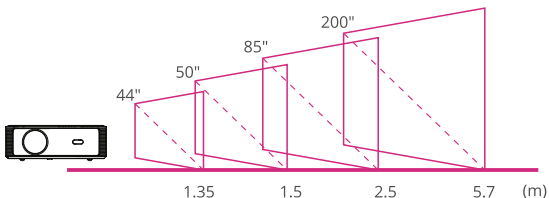

### Note:

Due to optical device error of about 3%, the above data is for reference only, Please use actual measurement when installing the device.

ISO 9001:2015 Certified Company  
[www.zebronics.com](http://www.zebronics.com)